AD-A173 551   ADAPTIVE CONTROL WITH FINITE TIME PERSISTENCY OF   1/2
   EXCITATION(U) NAVAL POSTGRADUATE SCHOOL MONTEREY CA
   I ONUK JUN 86

UNCLASSIFIED   F/G 9/3   NL
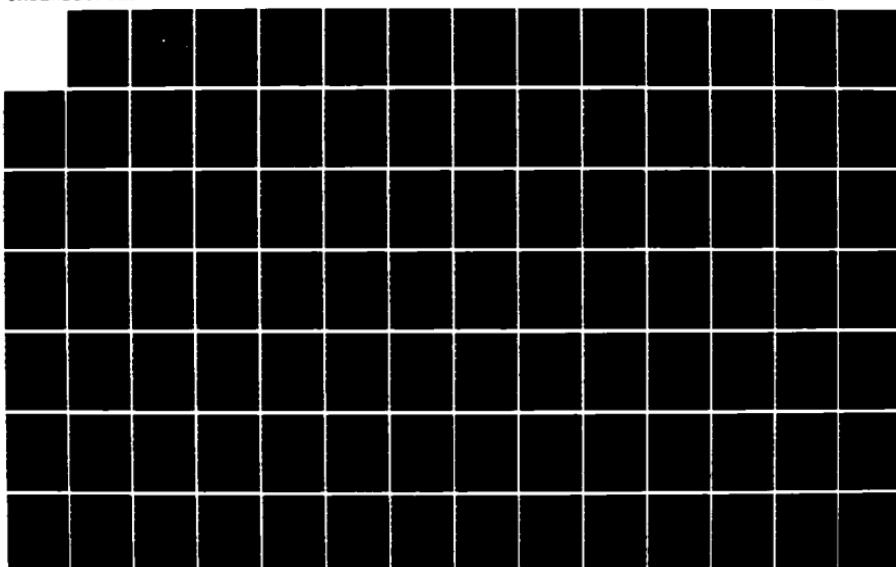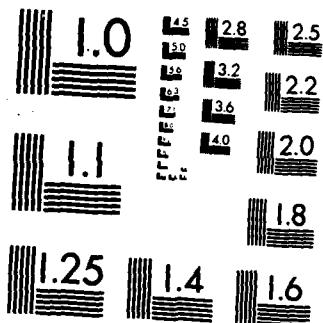
| 1.0 | 4.5 5.0 5.6 6.3 7.2 8.0 | 2.8 | 2.5 |
		3.2	2.2
		3.6	
1.1		4.0	2.0
			1.8
1.25	1.4		1.6

MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS-1963-A

NAVAL POSTGRADUATE SCHOOL
Monterey, California
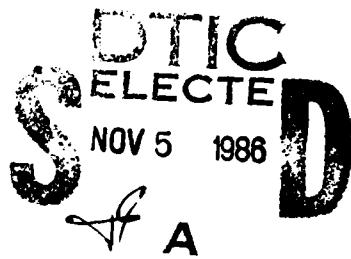
THESIS

ADAPTIVE CONTROL WITH FINITE TIME
PERSISTENCY OF EXCITATION

by

Irfan Onuk

June 1986

Thesis Advisor   Roberto Cristi

Approved for public release; distribution is unlimited

86 · 11   4 081

AD-A173 551

REPORT DOCUMENTATION PAGE

1a REPORT SECURITY CLASSIFICATION UNCLASSIFIED	1b. RESTRICTIVE MARKINGS
2a SECURITY CLASSIFICATION AUTHORITY	3 DISTRIBUTION/AVAILABILITY OF REPORT Approved for public release;
2b. DECLASSIFICATION/DOWNGRADING SCHEDULE	distribution is unlimited
4 PERFORMING ORGANIZATION REPORT NUMBER(S)	5 MONITORING ORGANIZATION REPORT NUMBER(S)

6a. NAME OF PERFORMING ORGANIZATION Naval Postgraduate School	6b OFFICE SYMBOL (If applicable) Code 62	7a. NAME OF MONITORING ORGANIZATION Naval Postgraduate School
6c. ADDRESS (City, State, and ZIP Code) Monterey, California 93943-5000		7b. ADDRESS (City, State, and ZIP Code) Monterey, California 93943-5000

8a NAME OF FUNDING/SPONSORING ORGANIZATION	8b. OFFICE SYMBOL (If applicable)	9. PROCUREMENT INSTRUMENT IDENTIFICATION NUMBER
8c. ADDRESS (City, State, and ZIP Code)		10 SOURCE OF FUNDING NUMBERS

		PROGRAM ELEMENT NO.	PROJECT NO	TASK NO	WORK UNIT ACCESSION NO

11 TITLE (Include Security Classification)

ADAPTIVE CONTROL WITH FINITE TIME PERSISTENCY OF EXCITATION

12 PERSONAL AUTHOR(S)
Onuk, Irfan

13a TYPE OF REPORT Master's Thesis	13b TIME COVERED FROM _____ TO _____	14 DATE OF REPORT (Year, Month, Day) 1986, June	15 PAGE COUNT 129

16 SUPPLEMENTARY NOTATION

17	COSATI CODES		18. SUBJECT TERMS (Continue on reverse if necessary and identify by block number)
FIELD	GROUP	SUB-GROUP	Adaptive Control
			Persistency of Excitation

19 ABSTRACT (Continue on reverse if necessary and identify by block number)

An indirect adaptive control algorithm has been studied to control physical systems with parameter uncertainties. Although the particular algorithm investigated is applicable to a wide class of discrete time linear systems, parameter convergence and therefore global stability of the whole system is guaranteed only if the external excitation contains a sufficiently large number of frequency components.

This research study has also investigated the possibility of stopping the identification procedure when the parameter error becomes sufficiently small, so the controller automatically turns itself from adaptive to time invariant, while still guaranteeing global stability of the closed-loop system. In this way the adaptive controller might be activated only when its gains do not provide satisfactory performances.

20 DISTRIBUTION/AVAILABILITY OF ABSTRACT ☒ UNCLASSIFIED/UNLIMITED ☐ SAME AS RPT ☐ DTIC USERS	21 ABSTRACT SECURITY CLASSIFICATION UNCLASSIFIED	
22a NAME OF RESPONSIBLE INDIVIDUAL Roberto Cristi	22b TELEPHONE (Include Area Code) (408) 646-2223	22c OFFICE SYMBOL Code 62Cx

1

#19 - ABSTRACT - (CONTINUED)

Computer programs of the indirect adaptive control have been written for simulation purposes using both recursive least squares and projection algorithms.

Adaptive Control with Finite Time
Persistency of Excitation

by

Irfan Onuk
Lieutenant Junior Grade, Turkish Navy
B.S., Turkish Naval Academy, 1979

Submitted in partial fulfillment of the
requirements for the degree of

MASTER OF SCIENCE IN ELECTRICAL ENGINEERING

from the

NAVAL POSTGRADUATE SCHOOL
June 1986

Author: _____
Irfan Onuk

Approved by: _____
Roberto Cristi, Thesis Advisor

_____
H.A. Titus, Second Reader

_____
Harriett B. Rigas, Chairman,
Department of Electrical and Computer Engineering

_____
J. N. Dyer,
Dean of Science and Engineering

3

ABSTRACT

An indirect adaptive control algorithm has been studied to control physical systems with parameter uncertainties. Although the particular algorithm investigated is applicable to a wide class of discrete time linear systems, parameter convergence and therefore global stability of the whole system is guaranteed only if the external excitation contains a sufficiently large number of frequency components.

This ~~research study~~ *thesis* has also investigated the possibility of stopping the identification procedure when the parameter error becomes sufficiently small, so the controller automatically turns itself from adaptive to time invariant, while still guaranteeing global stability of the closed-loop system. In this way the adaptive controller might be activated only when its gains do not provide satisfactory performances.

Computer programs of the indirect adaptive control have been written for simulation purposes using both recursive least squares and projection algorithms.

4

TABLE OF CONTENTS

I. INTRODUCTION

One of the most challenging, interesting and active fields
of Automatic Control is Adaptive Control. To implement high-
performance control systems when the plant dynamics are poorly
known or when large and unpredictable variations occur, the
control engineers prefer to use an important class of control
systems called Adaptive Control systems. Adaptive Control
comes from a desire and need for improving performance of
complex engineering systems with large uncertainties. It is
especially important in systems with many unknown parameters
that are changing with time. Also, it can be defined as a
special type of nonlinear feedback control, as a nonlinear,
nonautonomous dynamic system.

An adaptive controller can change its behavior in response
to changes in the dynamics of the plant and the disturbances.

The term adaptive control has been used at least from the
beginning of the 1950's. With recent advances in microproc-
essor technology, it has become feasible to implement adaptive
algorithms efficiently in real time at a reasonable cost.

There are three schemes for parameter adaptive control:
gain scheduling, model reference control and self-tuning
regulators. The starting point is an ordinary feedback con-
trol loop with a process and regulator with adjustable
parameters. But the main problem is to find a convenient way

of changing the regulator parameters in response to changes in process and disturbance dynamics. The following schemes differ only in the way the parameters of the regulator are adjusted.

A. GAIN SCHEDULING

Gain scheduling depends on finding auxiliary process variables correlated with the changes in plant dynamics. In this way it is possible to reduce the effects of parameter variations by changing the parameters of the regulator as functions of the auxiliary variables.

The block diagram of this scheme is given in Figure 1.1.
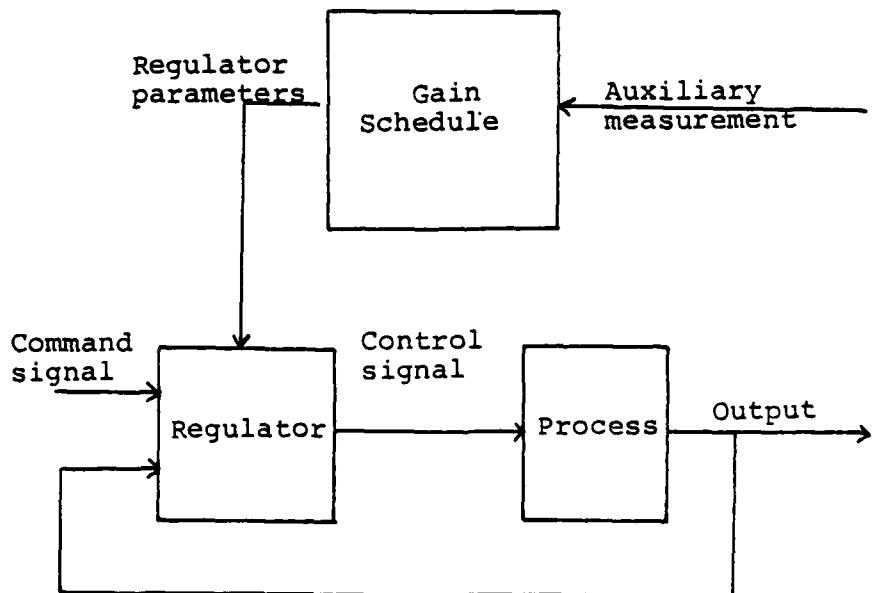
Figure 1.1. Block Diagram of Gain-Scheduling System

7

B. MODEL-REFERENCE ADAPTIVE SYSTEMS

In this type of adaptive system, a reference model speci-
fies the desired performance, and tells how the process output
should respond to the command signal. A block diagram of
model reference system is given in Figure 1.2. As seen, from
this figure, the reference model is part of the control system.
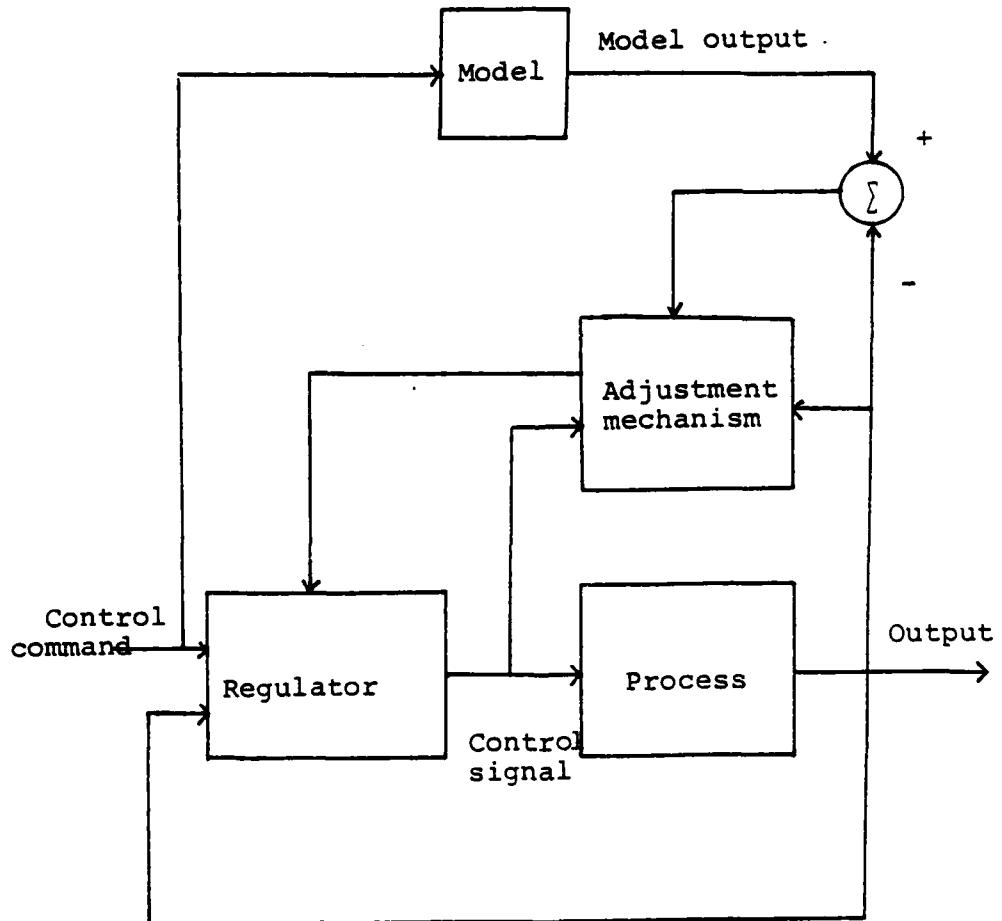
Figure 1.2. Block Diagram of the Model Reference
Adaptive System

This adaptive system has two loops: the lower loop contains Regulator and Process. The upper loop adjusts the parameters of the regulator, in such a way that the error between the model output and the process output tends to zero. In this type of control system, the main problem is to determine the adjustment mechanism so that a stable system results, which brings the tracking error to zero.

Model reference adaptive systems can be further subdivided into two categories: direct and indirect. In indirect control the plant parameters are estimated and the control parameters are adjusted based on these estimates so that the overall plant transfer function matches that of the reference model. In direct control no effort is made to identify the plant parameters but the control parameters are directly adjusted to minimize the error between plant and model outputs.

It turns out that the model reference approach is applicable only to plants with stable zeroes. In fact the only way the closed loop transfer function (Plant & Regulator) can match the one of the model in its poles and zeroes, is by removing the plant zeroes by cancellation with closed loop poles. This operation leads to the presence of uncontrollable or unobservable modes in the closed loop systems, which can be accepted only if they are stable (i.e., their effect decays to zero with time), and this constitutes the major limitation for model reference adaptive systems.

9

C. SELF-TUNING REGULATORS AND POLE PLACEMENT

A third approach to the adaptive problem is the self-tuning regulator. A block diagram of this type control system is given in Figure 1.3.

Desired performance
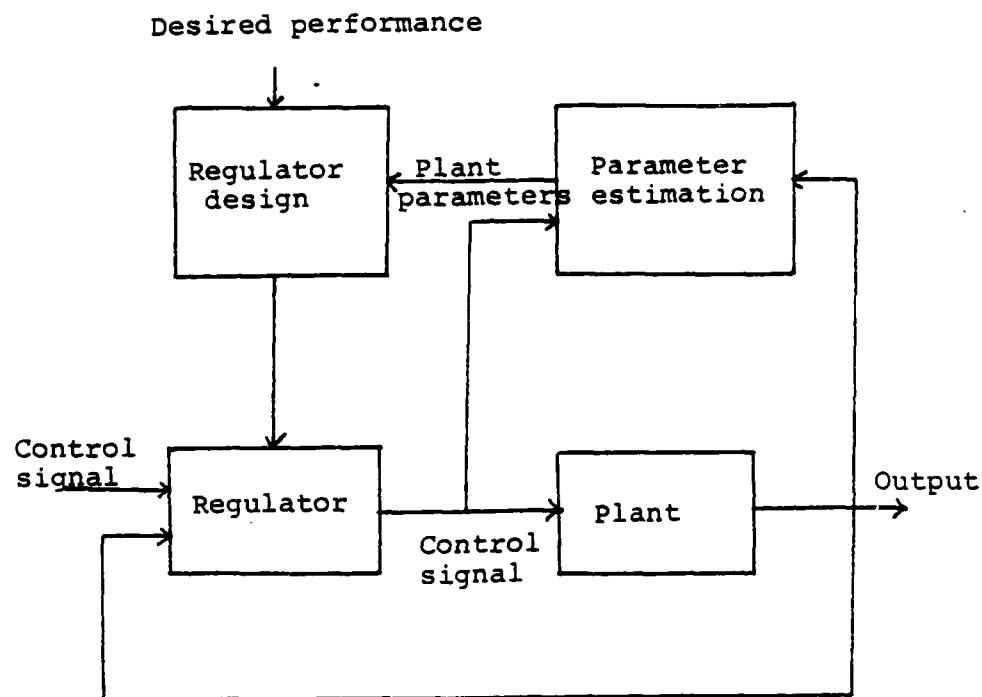
Figure 1.3. Block Diagram of a Self-Tuning Regulator

The reference model of the previous approach is replaced by some more general desired performances; such as error minimization or desired closed loop poles.

There are two loops in the system configuration. The lower loop contains the plant and linear feedback regulator.

The upper loop consists of a recursive parameter estimator and a design calculation adjusts the parameters of the regulator.

Also it is possible to classify this adaptive control scheme as direct and indirect. This classification depends on the complexity of the design calculation block that is seen in Figure 1.4.
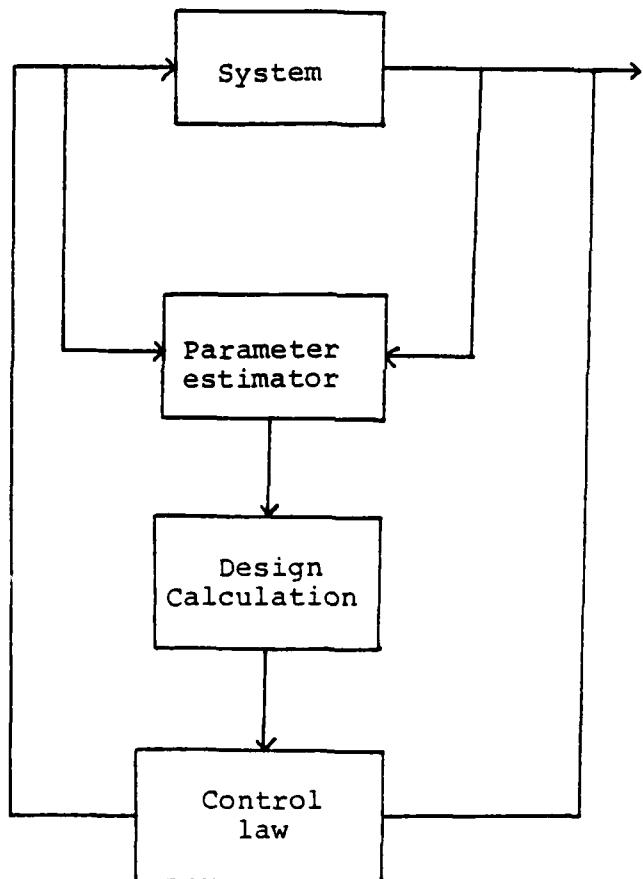
Figure 1.4. General Block Diagram of an Adaptive Control System

The first method is to parameterize the system directly in terms of compensator parameters.

This research project will concentrate on the last method, that is, pole placement and indirect adaptive control. The evaluation of the control law is indirectly determined on the basis of parameter estimates. This method is also called explicit, since the design is based on an explicit estimation of the process model. The parameters of the controller are updated indirectly via estimation of the process parameters. Several algorithms to estimate the parameters of a linear model are available in the literature. In this thesis two well-known estimation algorithms will be investigated: Recursive Least Squares and Projection. They represent a tradeoff between complexity of computation and performances, in the sense that best performances (with relatively high complexity are obtained by using Recursive Least Squares. Also, Block-processing is investigated to determine the period of the adaptation of the control parameters. Finite time persistency of excitation is also studied and simulated for indirect adaptive control.

The main reason of choice of indirect adaptive control for this research comes from the fact that it is applicable to nonminimum-phase systems, and there are no limitations on zeroes of the plant. Therefore, it is more general than model reference adaptive control.

Because of the effects of the zeroes of sampled data systems on adaptive control theory, we start investigating

the behavior of zeroes of sampled data systems. This thesis is organized as follows: In Chapter II zeroes of sampled data systems are analyzed by stating results available in the literature, and simulation studies. The indirect adaptive control problem is presented in Chapter III and computer simulation studies are given in Chapter IV.

The computer programs are presented in the Appendices B, C and D. Also the description of the programs is given in Appendix A.

II. ZEROES OF SAMPLED DATA SYSTEMS

Many control strategies are based on the assumption that
the zeroes of the plant are on a stable region of the com-
plex plane so that they can be cancelled by precompensation
or closed loop poles. One example is the model reference
adaptive control mentioned in the Introduction. However it
turns out that in sampled data systems with Zero Order Hold
(the most popular mean of Digital to Analog conversion) some
zeroes of the resulting discrete time plant are often in the
unstable region. In this chapter we analyze the position of
the zeroes of sampled data systems, in relation with the con-
tinuous time plant dynamics and sampling frequency. The
structure, the number of zeroes outside the unit disc and the
low frequency characteristic of the pulse transfer function
are examined from the transfer function for an important set
of continuous time processes.

Finally, it is investigated that zeroes of the sampled
data systems are sensitive to high frequency poles present
in continuous time transfer function.

A. TIME DOMAIN ANALYSIS OF THE ZEROES OF SAMPLED DATA TRANSFER FUNCTIONS

Poles and zeroes are important parameters of linear time-
invariant systems. The zeroes describe the way the internal
variables are coupled to the inputs and the outputs. As

described in [Ref. 6], the unstable zeroes limit the performance of control systems, since many design techniques are based on the cancellation of the process zeroes. This can be done provided the system's zeroes are stable.

The transformation of poles in the continuous time domain to the corresponding discrete time is given as:

$$P_i. \rightarrow e^{P_i T} \qquad (2.1)$$

where T is the sampling period. This transformation maps the left-half part of the s-plane onto the unit disc, so that stability is preserved. But there is no simple transformation for zeroes from continuous to discrete time domain. The type of hold circuit affects the position of the zeroes. Most digital control systems use a zero-order hold, and for this type of hold circuit, the effects are considered.

In the following discussion, the main results are limit theorems, which give the zero locations for small and large sampling periods.

If the continuous time transfer function G(S) is rational it follows from Equation (2.2) that H(z) is also a rational function

$$H(z) = (1-z^{-1}) \sum_i ((e^{P_i T})/(z-e^{P_i T})) ReS_{P_i} G(s)/s \qquad (2.2)$$

where:

15

$$\text{ReS}_{Pi} \quad = \quad \lim_{s \to Pi} \quad G(s)/s(s-P_i)$$

and P_i are the poles of $G(s)/s$.

The function $H(z)$ has generically n-1 zeroes. For particular values of the sampling period some zeroes may, however, go to infinity, or they may be cancelled by poles, i.e., hidden modes. Hidden modes should not be considered as zeroes of $H(z)$. In fact, there are in general no simple closed form expressions for the zeroes of H. The limiting cases for small or large sampling periods can be characterized. That is explained in the following theorem. The major steps in the proof are given by [Ref. 9].

Theorem 1:

Let $G(s)$ be a rational function

$$G(s) \quad = \quad K \, \frac{(s-z_1)(s-z_2) \; \dots \; (s-z_m)}{(s-p_1)(s-p_2) \; \dots \; (s-p_n)} \qquad (2.3)$$

and $H(z)$ the corresponding pulse transfer function. Assume that $m < n$. Then as the sampling period $T \to 0$, m zeroes of $H(z)$ go to 1 as $\exp(z_i T)$ and the remaining n-m-1 zeroes of $H(z)$ go to the zeroes of $B_{n-m}(z)$ where $B_n(z)$ is the polynomial defined as

$$B_n(z) \quad = \quad b_1 n_z^{\,n-1} + b_2 n_z^{\,n-2} + \dots + b_n^{\,n} \qquad (2.4)$$

and

$$b_k{}^n = \sum_{\ell=1}^{k} (-1)^{k-1} \ell^n \binom{n+\ell}{k-\ell} , \quad k = 1,\ldots,n \qquad (2.5)$$

The following results can be observed from the previous theorem:

1. The limiting zeroes of a pulse transfer function depend critically on the pole excess of the corresponding continuous time system.

2. A continuous time system with a pole excess larger than two will always give a pulse transfer function with zeroes outside the unit disc provided that the sampling period is sufficiently short. This may happen for quite reasonable sampling periods, and sampled data systems with unstable inverses are thus quite common.

An example is given to illustrate the above discussion.

Example 2.1:

Consider a system with transfer function

$$G(s) = \frac{1}{(s+1)^3}$$

The corresponding pulse transfer function can be computed as

$$H(z) = \frac{b_1 z^2 + b_2 z + b_3}{(z-e^{-T})^3}$$

where:

$$b_1 = 1 - (1 + T + T^2/2) e^{-T}$$

$$b_2 = (-2 + T + T^2/2) e^{-T} + (2 + T - T^2/2) e^{-2T}$$

$$b_3 = (1 - T + T^2/2)e^{-2T} - e^{-3T}$$

H(z) has a zero outside the unit disc if $0 < T < 1.8399$.

The result of Theorem 1 can be understood by studying the behavior of the continuous time transfer function $G(s) = s^{-n}$ and its pulse transfer function. The reason why Theorem 1 holds is because for a sampling period T small every system behaves like $G(s) = 1/s^{n-m}$ with the number of poles n and number of zeroes m.

The pulse transfer function corresponding to $G(s) = s^{-n}$ is given by

$$H(z) = \frac{T^n \, B_n(z)}{n! \, (z-1)^n} \qquad (2.6)$$

where $B_n(z)$ is given in Equation (2.4).

The polynomials B_n are found for some values of n using the program given in Appendix A.

$$B_1(z) = 1$$

$$B_2(z) = z + 1$$

$$B_3(z) = z^2 + 4z + 1$$

$$B_4(z) = z^3 + 11z^2 + 11z + 1$$

$$B_5(z) = z^4 + 26z^3 + 66z^2 + 26z + 1$$

The polynomials B_n have zeroes outside or on the unit circle for $n \geq 2$. The unstable zeroes are given in Table 2.1.

TABLE 2.1

UNSTABLE ZEROES OF $B_n(z)$

n	Unstable Zeroes of $B_n(z)$
2	-1
3	-3.732
4	-1, -9.899
5	-2.322, -23.20

Therefore, it can be noticed that there are continuous time systems with stable zeroes such that the corresponding pulse transfer function has unstable zeroes.

It is possible to give a complete characterization of the zeroes of the pulse transfer function for small sampling periods. A similar result for large sampling periods is given by Theorem 2.

Theorem 2:

Let G(s) be a strictly proper rational transfer function with $G(0) \neq 0$ and $\text{Re}P_i < 0$. Then all zeroes of the pulse transfer function go to zero as the sampling period T goes to infinity.

19

A lower limit on T for stable zeroes was obtained in [Ref. 14], here stated only for simple poles.

$$T > \frac{1}{\delta} \ln[2A(n+1)] \qquad (2.7)$$

where:

$$\delta = -\max_{i} \text{Re}P_i > 0 \qquad (2.8)$$

and

$$A = \max_{i} |A_i/G(0)| \qquad (2.9)$$

If $G(0) = 0$ it follows from Equation (2.10);

$$H(z) = G(0)z^{-1} + (1-z^{-1}) \sum_{i=1}^{n} A_i \frac{e^{P_i T}}{z - e^{P_i T}} \qquad (2.10)$$

The corresponding pulse transfer function has one zero at $z = 1$. The behavior of the rest of the zeroes may be more complex as is shown by Example 2.2.

Example 2.2:

Let continuous time transfer function be

$$G(s) = \frac{s}{[(s+1)^2 + 1](s+2)}$$

Then the corresponding pulse transfer function is

20

$$H(z) = \frac{e^{-T}(z-1)\{(e^{-T}+\sin T -\cos T)z +e^{-T}[1-e^{-T}(\sin T+\cos T)]\}}{2z(z-e^{-2T})(z^2-2ze^{-T}\cos T +e^{-2T})}$$

The zeroes are $z_1 = 1$ and

$$z_2 = \frac{e^{-2T}(\sin T+\cos T) -e^{-T}}{e^{-T}+\sin T-\cos T}$$

For control system design in discrete time domain it is important to know whether the zeroes of pulse transfer function are inside the unit disc or not. When all zeroes are inside the unit disc the sampled system has a stable inverse and all its zeroes can be cancelled. It is therefore of interest to find sufficient conditions which guarantee that all zeroes of a sampled transfer function are inside the unit disc. The criteria are given in Theorem 3 by [Ref. 6].

<u>Theorem 3:</u>

If G(s) is a strictly proper, rational transfer function with

(i) $\text{Re}P_i < 0$

(ii) $G(s) = 0$

(iii) $-\pi < \arg G(i\omega) < 0$, for $0 < \omega < \infty$

Then all the zeroes of the corresponding pulse transfer function H(z) are stable, so that criteria for no unstable zeroes are given both in terms of G(s) and in terms of conditions on the Nyquist curve $G(i\omega)$.

21

B. FREQUENCY DOMAIN ANALYSIS OF THE ZEROES OF SAMPLED
DATA SYSTEM

In this section, the number of zeroes outside the unit
disc and the low frequency characteristic of the pulse trans-
fer function are analyzed from the transfer function of a
set of continuous time processes.

The discrete frequency response of a continuous process
$G*(\omega)$ can be derived from Equation (2.11) by substituting
$z = \exp(j\omega T)$:

$$G(z) = K \frac{(z-\sigma_1) \ldots (z-\sigma_{n-1})}{(z-p_1) \ldots (z-p_n)} \qquad (2.11)$$

or it can be expressed by the holding device transfer function
$H(\omega)$ and process transfer function $G(\omega)$. Then it becomes:

$$G*(\omega) = \frac{1}{T} \sum_{k=-\infty}^{\infty} H(\omega+k\Omega) \ G(\omega+k\Omega) \qquad (2.12)$$

where k is an integer and $\Omega = 2\pi/T$. $G(\omega)$ is the frequency
response of the continuous time system $G(s)$.

For zero-order hold, the holding device frequency
response is

$$H(\omega+k\Omega) = \frac{1 - e^{-j\omega T}}{j(\omega + k\Omega)} \qquad (2.13)$$

Substituting Equation (2.13) into Equation (2.12) and taking
into account that $G(-\omega) = \hat{G}(\omega)$, where $\hat{G}$ is the conjugated

22

value of G, we obtain

$$G^{\star}(\omega) = \frac{1 - e^{-j\omega T}}{j\omega T} G(\omega) [1 - f(\omega) + \varepsilon(\omega)] \qquad (2.14)$$

where:

$$f(\omega) = \frac{\omega}{\Omega - \omega} \frac{G(\Omega - \omega)}{G(\omega)} \qquad (2.15)$$

$$\varepsilon(\omega) = \frac{\omega}{G(\omega)} \sum_{r=1}^{\infty} \{\frac{G(r\Omega + \omega)}{r\Omega + \omega} \cdot \frac{G((r+1)\Omega - \omega)}{(r+1)\Omega - \omega}\} \stackrel{\sim}{=} 0 \quad (2.16)$$

and r is an integer.

The number of the zeroes outside the unit disc are given by Theorem 4 [Ref. 10].

Theorem 4:

If a continuous process satisfies Equation (2.16) and the condition

$$\left| \frac{\hat{G}(\Omega - \omega)}{G(\omega)} \right| \leq 1 \qquad (2.17)$$

the number of poles of G(z) outside the unit disc is zero and the phase angle $\phi(\Omega/2) = $ arc $G(\Omega/2)$ is between 0 and $-\pi$ then its pulse transfer function possesses no zeroes outside the unit disc. If the value of phase angle is between $-\pi$ and -2π one of the zeroes lies outside the unit disc, etc.

23

$$G^*(z) = K^* \frac{(z-\sigma_1) \ldots (z-\sigma_4)}{(Z-e^{-T/T_1}) \ldots (z-e^{T/T_5})}$$

Thus, inverse stable continuous processes frequently possess inverse unstable pulse transfer functions. For instance if in a transfer function satisfying the conditions given by Equations (2.16) and (2.17), $\tau_i > T$ and $T_i > T$ are real and positive for every i and the orders of its denominator and numerator differ by more than two, then usually the pulse transfer function is inversely unstable.

Also, from Theorem 4, the phase of the continuous frequency response at the Nyquist frequency $\Omega/2$ is directly related to the number of unstable discrete time zeroes. High frequency dynamics (where high frequency is intended as above the Nyquist frequency) influence the phase at the Nyquist frequency, so that it can cause the number of unstable discrete time zeroes to increase. This high frequency pole may come from the structure of the measuring devices, actuators or other hardware parts of the physical realization. Usually, we neglect these terms in the transfer function. The following example can give an idea about this problem.

Example 2.3:

Let the transfer function of the plant be

$$H(s) = \frac{1}{s^2 - 1}$$

which has a pulse transfer function given by

24

$$H(z) = \frac{.54308z + .54307}{z^2 - 3.08616z + 1}$$

with one zero at z = -0.998.

By adding the extra dynamics D(s) as

$$D(s) = \frac{w_n^2}{s^2 + 2\zeta w_n + w_n^2}$$

the zeroes of the pulse transfer function of the entire system for $\zeta = 0.9$ and some w_n values are given in Table 2.2 and plotted in Figure 2.1.

TABLE 2.2

ZEROES LOCATIONS FOR DIFFERENT w_n VALUES

w_n	Zeroes		
7	-3.162004	-0.01349725	-0.1775817
8	-2.866706	-0.009074569	-0.1386477
9	-2.633762	-0.005823303	-0.1097788
10	-2.447441	-0.003552481	-0.08844686
11	-2.296317	-0.002030142	-0.07263207
12	-2.172057	-0.001109288	-0.06071956
13	-2.068539	-0.0004927621	-0.05170227
14	-1.981240	-0.0002742233	-0.04454243
15	-1.906793	-0.00009020962	-0.03895098
16	-1.842641	-0.00006002390	-0.03435726
17	-1.786843	-0.00004560289	-0.03068041
18	-1.737905	-0.00003143626	-0.02745582
19	-1.694647	-0.00005455861	-0.02487628
20	-1.656146	-0.0001198984	-0.02266212

LOCATION OF DOMINANT ZERO
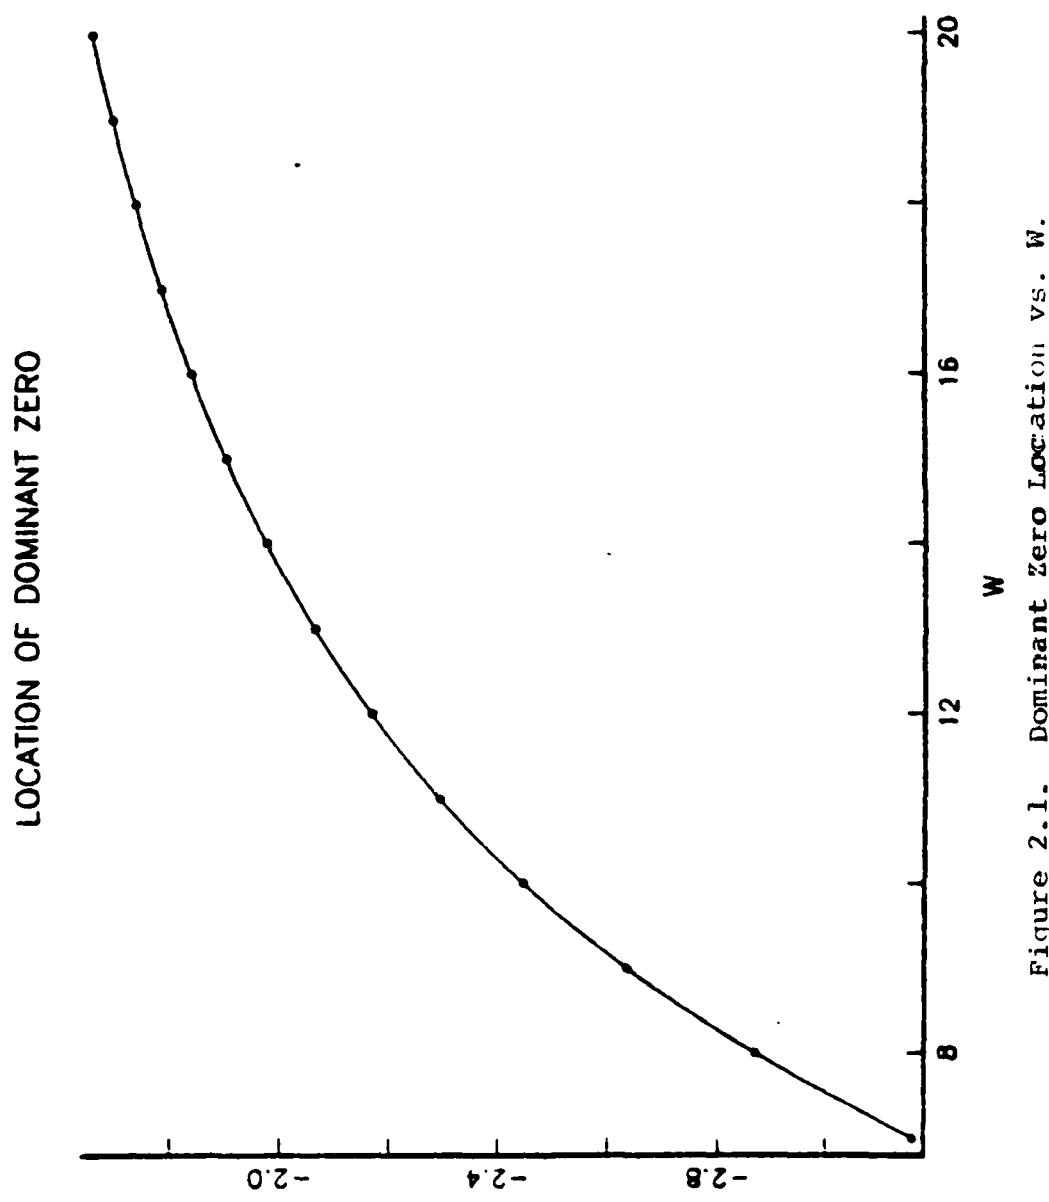
Figure 2.1. Dominant Zero Location vs. W.

We notice that as w_n decreases, the unstable zero gets more and more unstable.

III. INDIRECT ADAPTIVE CONTROL FOR DISCRETE TIME SYSTEMS

As mentioned in the Introduction, the main advantage of indirect adaptive control systems comes from the fact that it is applicable to discrete time systems with unstable zeroes. It is assumed that the system is as given in Figure 3.1,
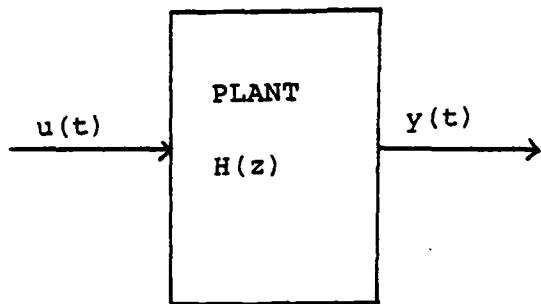
Figure 3.1. Single Input--Single Output Plant System

The pulse transfer function is given by

$$H(z) = \frac{r(z)}{p(z)} \qquad (3.1)$$

$r(z)$ and $p(z)$ being polynomials given by:

$$p(z) = z^n + p_1 z^{n-1} + \ldots + p_n \qquad (3.2)$$

$$r(z) = r_1 z^{n-1} + r_2 z^{n-2} + \ldots + r_n \qquad (3.3)$$

28

The degree of the denominator polynomial p(z) determines the system order n. Also, if we assume the plant to be causal, the polynomial r(z) has degree at most n-1. The sequences u(t) and y(t) denote the system input and output, respectively. An alternative way of describing the plant is by its difference equation written in operator form, as

$$p(D)y(t) = r(D)u(t) \qquad (3.4)$$

where:

$$p(D) = 1 + p_1 D + \ldots + p_n D^n \qquad (3.5)$$

$$r(D) = r_1 D + \ldots + r_n D^n \qquad (3.6)$$

and $D = q^{-1}$ is the backward-shift operator, defined as $Dy(t) = y(t-1)$.

In the adaptive control problem the parameters in p(D) and r(D) are assumed to be unknown. Only the system order n is assumed to be known to the designer. Hence, two problems appear at this point:

1. Parameter estimation; and

2. Compensator structure.

The general block diagram of the indirect adaptive control problem is given in Figure 3.2. Estimation of the parameters of the plant is mentioned in Chapter III.C. The compensator structure is derived from the pole placement problem for

29
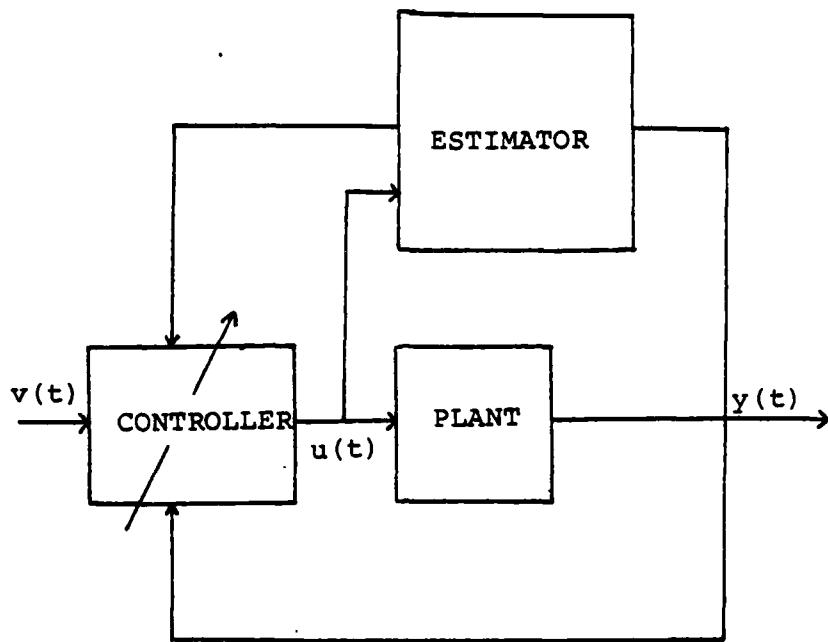
Figure 3.2.   General Block Diagram of Indirect Adaptive
Control

linear systems; and it is computed on the basis of the esti-
mated plant parameters.

In the next section, we discuss the pole-placement
problem which will be the basis for the determination of a
suitable controller structure.

A.   POLE PLACEMENT DESIGN BASED ON INPUT-OUTPUT MODELS

The purpose of pole-placement by state-feedback is to
determine a feedback controller so that all poles of the
closed-loop system assume prescribed values.   This can be
easily achieved if all state variables of the plant are

measured. In general, the states may not be directly available. However, under certain observability conditions the state can be observed on the basis of input-output measurements. For this reason observers are used to estimate the state of any observable realization. Along these lines, the controller can be considered as composed of an observer and a gain matrix.

Consider a state-space representation of the plant assumed to be controllable and observable:

$$\underline{x}(t+1) \;=\; \Phi\underline{x}(t) \,+\, \Gamma u(t) \tag{3.7}$$

$$y(t) \;=\; C\underline{x}(t) \tag{3.8}$$

with Φ, Γ, C matrices of dimensions $n \times n$, $n \times 1$ and $1 \times n$, respectively.

The block diagram of the controlled system combined with the observer-controller is given in Figure 3.3. V(t) is an external input which will be discussed in Chapter IV. If we restrict ourselves to the class of linear control inputs we can write:

$$u(t) \;=\; - L\hat{\underline{x}}(t) \,+\, v(t) \tag{3.9}$$

as discussed in [Ref. 3], where L is a constant matrix as

$$L \;=\; [l_1 \; l_2 \; \cdots \; l_n]$$
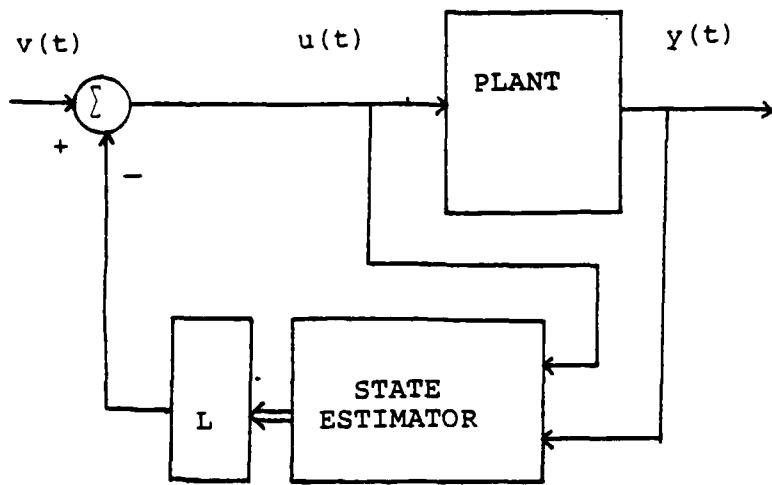
Figure 3.3. Block Diagram of the Controlled System

and $\hat{x}(t)$ indicates the estimated values of the actual states of the plant. It is a well-known result in systems theory [Ref. 3] that we may define the observer dynamics as

$$\hat{\underline{x}}(t+1) \;=\; \Phi\hat{\underline{x}}(t) + \Gamma u(t) + K[y(t) - C\hat{\underline{x}}(t)] \qquad (3.10)$$

where K is a matrix such that

$$K^T \;=\; [k_1 \quad k_2 \quad \cdots \quad k_n]$$

and $\Phi-KC$ is a matrix with eigenvalues inside the unit circle.

Rearranging Equation (3.10) we obtain the state-space dynamical equations of the controller as a two input--one output linear system.

$$\hat{\underline{x}}(t+1) \;=\; [\Phi-KC]\hat{\underline{x}}(t) + \Gamma u(t) + Ky(t) \qquad (3.11)$$

32

$$u(t) = -L\hat{x}(t) + v(t) \qquad (3.12)$$

To convert the state-space representation of the pole-placement problem to a transfer function (using polynomials) form, taking the z transform of Equations (3.11) and (3.12) we obtain

$$\hat{X}(z) = (zI-Q)^{-1}\Gamma U(z) + (zI-Q)^{-1}KY(z) \qquad (3.13)$$

$$U(z) = -L(zI-Q)^{-1}\Gamma U(z) - L(zI-Q)^{-1}KY(z) + V(z) \qquad (3.14)$$

where we define the matrix $Q = \Phi - KC$. Also we can define the rational functions

$$-L(zI-Q)^{-1}\Gamma = \frac{L \; adj(zI-Q)\Gamma}{det(zI-Q)}$$

$$= \frac{k(z)}{q(Z)} \qquad (3.15)$$

and

$$-L(zI-Q)^{-1}K = \frac{-L \; adj(zI-Q)K}{det(zI-Q)}$$

$$= \frac{h(z)}{q(z)} \qquad (3.16)$$

where $q(z)$, the observer polynomial, is an arbitrary stable polynomial. Arbitrariness of $q(z)$ is guaranteed by the assumption of the plant being observable, while $h(z)$ and

33

k(z), the controller polynomials, have to be computed, on the basis of the plant dynamics and q(z).

Thus, the structure of the control input u can be described as:

$$U(z) \;=\; \frac{k(z)}{q(z)} U(z) + \frac{h(z)}{q(z)} Y(z) + V(z) \tag{3.17}$$

or it may be expressed in a difference operator form as

$$q(D)u(t) \;=\; K(D)u(t) + h(D)y(t) + q(D)v(t) \tag{3.18}$$

To make the notation more attractive, let us write Equation (3.18) as

$$u(t) \;=\; \frac{k(D)}{q(D)} u(t) + \frac{h(D)}{q(D)} y(t) + v(t) \tag{3.19}$$

The block diagram of the above controlled system is in Figure 3.4. Hence, the closed-loop system defined from external input v(t) to the output y(t) has transfer function

$$y(t) \;=\; \frac{q(D)r(D)}{p(D)[q(D)-k(D)] - r(D)h(D)} \, v(t) \tag{3.20}$$

In the pole-placement problem, the goal is to determine the compensator parameters (k,h,q) so that the closed-loop poles are as we desire,

$$y(t) \;=\; \frac{r(D)}{p^*(D)} \, v(t) \tag{3.21}$$

34
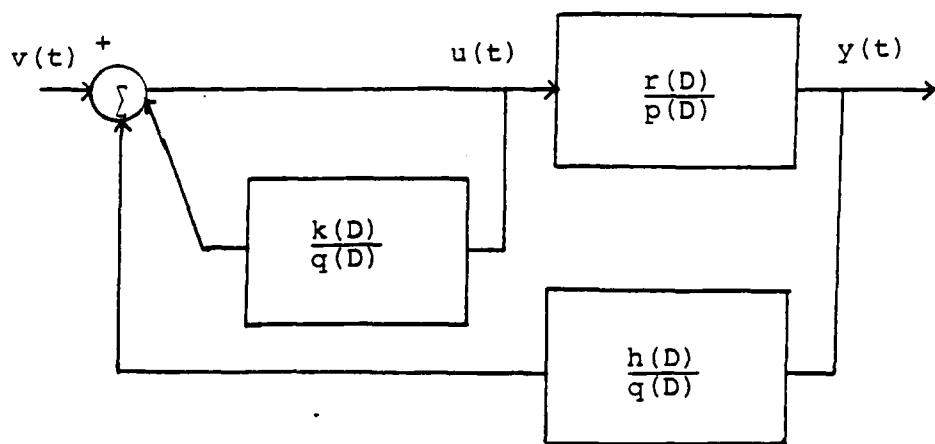
Figure 3.4.   Transfer Function Form of the Closed-
Loop System

$p^*(D)$ being an arbitrary stable polynomial in the difference

operator D.   Roots of $p^*(D)$ are the new assigned poles of the

closed-loop system.

By equating Equations (3.20) and (3.21), we obtain that

k, h, q have to satisfy the polynomial equation

$$p(D)[q(D) - k(D)] - r(D)h(D) = q(D)p^*(D) \qquad (3.22)$$

which can be written as

$$k(D)p(D) + h(D)r(D) = F(D) \qquad (3.23)$$

where:

$$F(D) = q(D)[p(D) - p^*(D)].$$

35

Therefore, the problem of determining a suitable compensator for pole-placement is equivalent to solving the polynomial equation (3.23) which is known by the name of Diophantine equation. The conditions by which this equation can be solved, together with the method of solution itself, are given in the following section.

B. DIOPHANTINE EQUATION

The general form of the Diophantine equation in the unknown polynomials K(z) and H(z) is given by:

$$F(z) = k(z)P(z) + h(z)R(z) \qquad (3.24)$$

with:

$$k(z) = k_o + k_1 z + \ldots + k_m z^m, \quad k_m \neq 0 \qquad (3.25)$$

$$h(z) = h_o + h_1 z + \ldots + h_m z^m \qquad (3.26)$$

$$P(z) = P_o + p_1 z + \ldots + p_n z^n \qquad (3.27)$$

$$R(z) = r_o + r_1 z + \ldots + r_n z^n \qquad (3.28)$$

and

$$F(z) = f_o + f_1 z + f_2 z^2 + \ldots + f_{n+m} z^{n+m} \qquad (3.29)$$

where:

36

k_i, h_i, p_i, r_i and f_i are constant, not necessarily all nonzero.

In the general pole placement setting, the polynomials $p(z)$, $r(z)$, $F(z)$ are given, while $k(z)$, $h(z)$ are unknown.

In the rest of this section, we determine the conditions by which the Diophantine equation can be solved and the method of solution.

By substituting Equations (3.25)-(3.29) into (3.24), we obtain:

$$f_o + f_1 z + \ldots + f_{n+m} z^{n+m} = (p_o + p_1 z + \ldots + p_n z^n)(k_o + k_1 z + \ldots + k_m z^m) + (r_o + r_1 z + \ldots + r_n z^n)(h_o + h_1 z + \ldots h_m z^m) \qquad (3.30)$$

and equating the coefficients of the same power of z yields the linear relation:

$$C^T S_m = [f_o \quad f_1 \quad f_2 \quad \ldots \quad f_{n+m}] \qquad (3.31)$$

where the vector C is defined as:

$$C = [k_o \quad h_o \quad k_1 \quad h_1 \quad \ldots \quad k_m \quad h_m]^T \qquad (3.32)$$

and the matrix S_m as:

$$
S_m = \begin{bmatrix}
p_0 & p_1 \cdots p_{n-1} & p_n & 0 & 0 & \cdots & 0 \\
r_0 & r_1 \cdots r_{n-1} & r_n & 0 & 0 & \cdots & 0 \\
0 & p_0 \cdots p_{n-2} & p_{n-1} & p_n & 0 & \cdots & 0 \\
0 & r_0 \cdots r_{n-2} & r_{n-1} & r_n & 0 & \cdots & 0 \\
 & \vdots & & & & \vdots & \\
 & \vdots & & & & \vdots & \\
 & \vdots & & & & \vdots & \\
0 & 0 \cdots 0 & & p_0 & p_1 & \cdots & p_n \\
0 & 0 \cdots 0 & & r_0 & r_1 & \cdots & r_n
\end{bmatrix}
\qquad (3.33)
$$

Equation (3.31) is a linear algebraic equation in the unknown vector C. The matrix S_m consists of m+1 block rows; each block row has two rows and can be obtained by shifting its previous block row to the right by one column. It is a $2(m+1) \times (n+m+1)$ matrix.

In order for a solution to exist, the matrix S_m has to be full column rank [Ref. 5]. This can be satisfied if $2(m+1) \geq n+m+1$, or $m \geq n-1$.

When S_m is a square matrix (m = n-1), it is called the Sylvester matrix of P and R, which has nonzero determinant provided polynomials P and R are mutually coprime, i.e., they do not have common factors [Ref. 6].

We can summarize the steps to find h and k, mentioned above, as:

1. Let n be the order of the system.

2. Choose q(z) to be an arbitrary polynomial of degree n.

3. Form the matrix S_m using $P(z)$ and $R(z)$.

4. Set up the polynomial $F(z)$ as:

$$F(z) = q(z)[p(z) - p*(z)].$$

5. Solve for parameters of $h(z)$ and $k(z)$.

6. Set up the polynomials $h(z)$ and $k(z)$, or $h(D)$ and $k(D)$ using the relation $D = z^{-1}$.

C. PARAMETER ESTIMATION

As mentioned above, in indirect adaptive control, we have to estimate the parameters of the plant, where the parameters are the coefficients of the transfer function

$$H(z) = \frac{r(z)}{p(z)} \tag{3.34}$$

We can compute the controller parameters $h(D)$ and $k(D)$ from the Diophantine equation on the basis of the estimated plant (say r, p).

A large number of different identification methods are available. In the literature, one broad distinction is between on-line methods and off-line methods. In the off-line case, it is presumed that all data are available prior to analysis. Consequently, the data may be treated as a complete block of information, with no strict time limit on the process of analysis. In contrast to the off-line case, the on-line case deals with sequential data, which requires the paraemter estimates to be recursively updated within the time limit imposed by the sampling period.

As mentioned, on-line estimation schemes produce an updated parameter estimate within the time span between successive samples.

Also, the on-line methods are the only alternative if the estimation is going to be used in an adaptive controller or if the process is time-varying. In this thesis, we consider two classes of estimation algorithms:

1. projection;
2. recursive least-squares.

Before proceeding, it can be said that input-output characteristics of a wide-class of linear and nonlinear deterministic dynamical systems can be described by a model expressed in the following form:

$$y(t) = \Phi(t-1)^T \theta_o \tag{3.35}$$

where $y(t)$ denotes the system output at time t, $\Phi(t-1)$ denotes a vector given as:

$$\Phi(t-1)^T = [y(t-1) \ y(t-2) \ \ldots \ y(t-n) \ u(t-1) \ \ldots \ u(t-n)] \tag{3.36}$$

and θ denotes the parameters of the plant, described as:

$$\theta_o = \{-p_1, -p_2, \ldots, p_n, r_1, r_2, \ldots, r_m\}^T \tag{3.37}$$

The following example illustrates the representation of the plant as given in Equation (3.35).

Example 3.1:

Suppose the pulse transfer function is

$$H(z) = \frac{z+1}{z^2 + 2z + 3}$$

It is also expressed in the following form:

$$H(z^{-1}) = \frac{z^{-1} + z^{-2}}{1 + 2z^{-1} + 3z^{-2}}$$

$$H(q^{-1}) = \frac{q^{-1} + q^{-2}}{1 + 2q^{-1} + 3q^{-2}}$$

Hence, the difference equation becomes

$$y(t) = -2y(t-1) - 3y(t-2) + u(t-1) + u(t-2)$$

which can be expressed as:

$$y(t) = [y(t-1) \; y(t-2) \; u(t-1) \; u(t-2)] \begin{bmatrix} -2 \\ -3 \\ 1 \\ 1 \end{bmatrix}$$

The rest of this section illustrates the estimation methods. The projection algorithm and the recursive least-squares algorithm are analyzed sequentially.

41

(I) Underline{Projection Algorithm}

By the Projection Algorithm, the sequence of estimates $\hat{\theta}(t)$ is recursively computed as:

$$\hat{\theta}(t) = \hat{\theta}(t-1) + \frac{a\phi(t-1)}{c + \phi(t-1)^T \phi(t-1)}[y(t) - \phi(t-1)^T\hat{\theta}(t-1)] \qquad (3.38)$$

with arbitrary initial estimate $\hat{\theta}(0)$ and $c > 0$; $0 < a < 2$. The detailed derivation steps are given by [Ref. 2].

This algorithm is also known as the normalized least-mean-squares (NLMS) algorithm. The algorithm results from the following optimization problem: Given $\hat{\theta}(t-1)$ and $y(t0$, determine $\hat{\theta}(t)$ so that

$$J = \frac{1}{2}||\hat{\theta}(t) - \hat{\theta}(t-1)||^2 \qquad (3.39)$$

is minimized subject to

$$y(t) = \phi(t-1)^T\hat{\theta}(t) \qquad (3.40)$$

The main properties of the projection algorithm are the following:

1. Estimation of θ at time t, $\hat{\theta}(t)$ is always closer to the actual value of θ than the preceding estimated value $\hat{\theta}(t-1)$.

$$||\hat{\theta}(t) - \theta_o|| < ||\hat{\theta}(t-1) - \theta_o|| < ||\hat{\theta}(0) - \theta_o||; \qquad (3.41)$$

$$t \geq 1$$

42

2. When the time goes to infinity, the error between the actual output of the system and its predicted value will converge to zero.

$$\lim_{t \to \infty} \frac{e(t)}{[c + \Phi(t-1)^T \Phi(t-1)]^{1/2}} = 0 \qquad (3.42)$$

where:

$$e(t) = y(t) - \Phi(t-1)^T \hat{\theta}(t-1)$$

3. $\lim_{t \to \infty} ||\hat{\theta}(t) - \hat{\theta}(t-k)|| = 0$ for any finite k $\qquad (3.43)$

The adaptation rate converges to zero as $t \to \infty$.

(II) Recursive Least Squares Algorithm

According to Gauss the principle on which the least square estimates are based is that the unknown parameters of the process should be chosen in such a way that the sum of the squares of the differences between the actually observed and computed values multiplied by numbers that measure the degree of precision is a minimum.

The recursive least squares algorithm is given by the following equation in [Ref. 2].

$$\hat{\theta}(t) = \hat{\theta}(t-1) + \frac{P(t-2)\Phi(t-1)[y(t) - \Phi(t-1)^T \hat{\theta}(t-1)]}{1 + \Phi(t-1)^T P(t-2)\Phi(t-1)} \qquad (3.44)$$

for $t \geq 1$ and

43

$$P(t-1) = P(t-2) \frac{P(t-2)\Phi(t-1)\Phi(t-1)^T P(t-2)}{1 + \Phi(t-1)^T P(t-2)\Phi(t-1)} \qquad (3.45)$$

with $\hat{\theta}(0)$ given and $P(-1)$ is any positive definite matrix P_o.

The algorithm results from the minimization of the following quadratic cost function:

$$J_N(\theta) = \frac{1}{2} \sum_{t=1}^{N} \{y(t)-\Phi(t-1)^T\theta\}^2 + \frac{1}{2}(\theta-\hat{\theta}(0)^T P_o^{-1}(\theta-\hat{\theta}(0))$$

$$(3.46)$$

We can observe that the cost function represents the sum of squares of the output prediction error $e(t)$.

$$e(t) = y(t) - \Phi(t-1)^T\hat{\theta} \qquad (3.47)$$

The second term of the right-hand side of the cost function accounts for the initial parameter estimates weighted by the matrix P_o. In this way, we can consider P_o (the initial condition of $P(t)$ in Equation (3.45)) as the "confidence" on the initial conditions $\hat{\theta}(0)$.

The least squares algorithm, as can be seen from the simulation results, has much faster convergence than the projection algorithm.

D.   PERSISTENCY OF EXCITATION

In order to guarantee global stability of indirect adaptive control algorithms, the input to the plant has to be

44

persistently exciting, which in turn implies global convergence of the plant parameters to the corresponding actual values [Ref. 3]. To obtain consistent estimates of the plant parameters, it is necessary that the input signal to the plant be sufficiently rich in frequencies, and excites all modes of the plant.

In a closed loop set-up, the control input is the sum of an external input signal $v(t)$ and a feedback signal from the adaptive controller.

The feedback signal may in principle cancel any excitation contained in the external input signal. This problem and the potential for unbounded growth of the control and output signals have made the guarantee of persistent excitation a difficult problem. Recently, Elliot [Ref. 8] gave sufficient conditions which guarantee persistency of excitation. The following theorems summarize these conditions.

Theorem 4.1:

Let w be the number of parameters estimated. In order to guarantee global convergence of the plant parameters to their true values, the following conditions have to be satisfied:

1. The external input $v(t)$ should consist of a sum of 2w sinusoids.

2. The compensator parameters should be updated each N samples, with $N \geq 10n$.

Therefore, in this thesis report, block processing is used in the sense that N data samples are taken, and N iterations of the recursive least-squares algorithm are performed between control parameters $(\hat{h}, \hat{k})$ updates. To avoid time

45

variation of the plant dynamics during the spanning process, the control parameters are held constant during spanning blocks (of length N) and are changed only between them.

As we can see from Theorem 4.1, these two conditions are sufficient to guarantee parameter convergence for any initial conditions as:

$$\lim_{k \to \infty} \hat{\theta}_k \cdot = \theta *$$

$\hat{\theta}_k$ being the estimate of $\theta *$ at time t_k.

In the next section, we will examine finite time persistency of excitation.

E. FINITE TIME PERSISTENCY OF EXCITATION

It is clear that the persistency of excitation condition on the external input $v(t)$ is the main limitation about this adaptive control algorithm. Recently, in a report by Cristi [Ref. 15], a possible solution to this problem has been given, by stopping parameter adaptation when the performances are close to the desired ones. More precisely, the model output error between desired output of the closed-loop system and controlled plant's output is the measure of how far the system is from the desired performance (i.e., pole placement) and adaptation is stopped whenever the error falls below an arbitrary, preassigned threshold. The configuration of the system is given in Figure 3.5.
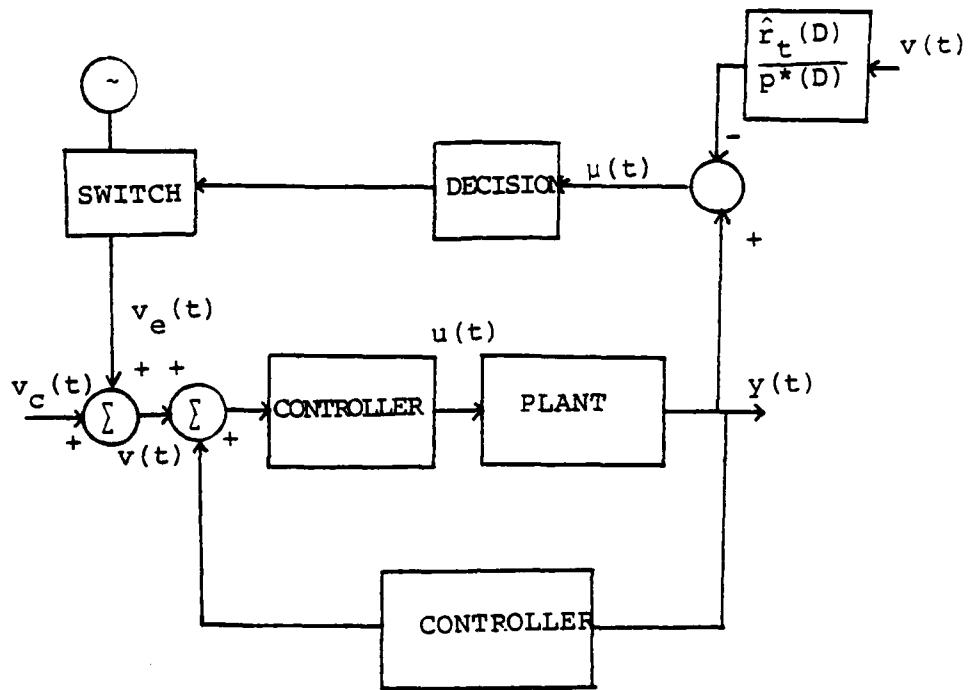
Figure 3.5.   Indirect Adaptive Control Scheme with
              Added Finite Time P.E.

The model output error can be defined as

$$\mu(t) \;=\; y(t) \;-\; \frac{\hat{r}_t(D)}{p^*(D)} \; v(t) \tag{3.48}$$

The finite time persistency of excitation algorithm can
be given as follows:

1. $t = t+1$.

2. Compute $\mu(t)$ from Equation (3.48).

3. If $|\mu(t)| > \epsilon$, compute compensator parameters as in
    Chapter III.

4. If $|\mu(t)| \leq \epsilon$ go to 1.

47

A major difficulty with this algorithm is to be able to guarantee global stability of the whole system. Therefore we have to prove that the signals in the loop are bounded, provided the external input v(t) is bounded. Global stability of the closed-loop system is proved below.

When time goes to infinity and persistency of excitation is present, parameters of the estimates of the plant polynomials $\hat{r}_t$ and $\hat{P}_t$ converge to the actual values r and p. Therefore, the difference between measured output and desired output tends to zero, and also $\mu(t)$ tends to zero. Thus, by definition of limit, there exists an instant t_o such that

$$|\mu(t)| \quad < \quad \epsilon$$

for all $t > t_o$ and for any given $\epsilon > 0$. Rearranging Equation (3.48) yields

$$y(t) \quad = \quad \frac{\hat{r}(D)}{p^*(D)} \, v(t) + \mu(t) \qquad (3.49)$$

which can be expressed on a block diagram form as in Figure 3.6.
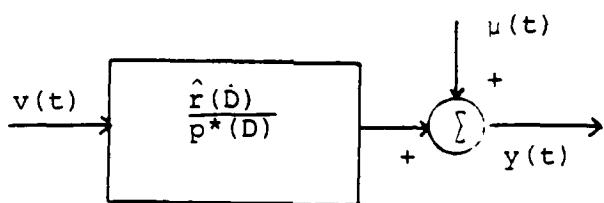
Figure 3.6. Block Diagram Representation of Equation (3.49)

48

It can be interpreted as a single input single output linear stable process with bounded input $v(t)$ and bounded disturbance $\mu(t)$. From the fact that stable linear systems with a bounded input produce a bounded output, the global stability results follow easily. So that with finite time persistency excitation, the closed-loop system is eventually equivalent to a system with poles as desired, bounded zeroes with a bounded output disturbance $\mu(t)$.

We can generate the external input $v(t)$ as

$$v(t) = v_e(t) + v_c(t) \qquad (3.50)$$

with $v_c(t)$ the external desired command and $v_e(t)$ an added persistency excitation signal. When the adaptation is continuing, the external input is composed of $v_c(t)$ and $v_e(t)$, but after stopping the adaptation persistency of excitation is not needed, it will be identical to the longer, so that $v_c(t)$ can decay to zero.

In this way, the adaptive algorithm is activated only when the performance index $\mu(t)$ is larger than a minimum threshold. In the next chapter, simulation studies will show their efficiency via some examples.

IV. SIMULATION STUDIES

This research report includes three computer programs.
The program named CONDIS, given in Appendix B, is used to
investigate the behavior of the zero in sampled data systems.
This program computes the parameters of the discrete time
transfer function from the parameters of its continuous time,
and the sampling rate. This program has been used to inves-
tigate the perturbations of the zeroes for different values
of the sampling interval.

The other two programs given in Appendix C and D simulate
the indirect adaptive control using recursive least squares
and projection algorithms. Entering order and numerator,
denominator parameters of the plant, observer polynomial and
desired closed-loop characteristic polynomial, the program
simulates the entire system in an interactive fashion. Also
it is capable of graphical and tabulation results.

The adaptive controller presented above has been simulated
for several different plant dynamics.

Example 4.1:

Let the discrete time transfer function of the plant be:

$$H(z) = \frac{z + 2}{z^2 - 2z + 0.75} = \frac{z + 2}{(z - 1.5)(z - 0.5)}$$

The plant has one unstable zero, $z = -2$, and two poles
$p_1 = 1.5$ and $p_2 = 0.5$.

50

The polynomials $q(z)$ and $p*(z)$ are chosen to be stable polynomials with degree n.

In particular, let

$$q(z) = z^2 - 0.3z - 0.28 = (z - 0.7)(z + 0.4)$$

and

$$p*(z) = z^2 - 1.1z + 0.3 = (z - 0.5)(z - 0.6)$$

both having stable roots, i.e., inside the unit disc in the z-plane. Before going into simulation study, the problem is solved analytically by comparing their responses. By writing the plant dynamics in shift-operator form,

$$H(q^{-1}) = \frac{q^{-1} + 2q^{-2}}{1 - 2q^{-1} + 0.75q^{-2}}$$

we can derive the difference equation of the given system as

$$y(t) = 2y(t-1) - 0.75y(t-2) + u(t-1) + 2u(t-2)$$

$$y(t) = \phi(t-1)^T \theta*$$

where

$$\Phi(t-1) = \begin{bmatrix} -y(t-1) \\ -y(t-2) \\ u(t-1) \\ u(t-2) \end{bmatrix}$$

and

$$\theta^* = \begin{bmatrix} -2 \\ 0.75 \\ 1 \\ 2 \end{bmatrix}$$

θ^* being the vector of the actual parameters of the plant. Generally, it can be partitioned as:

$$\theta^* = \begin{bmatrix} \underline{p} \\ \underline{r} \end{bmatrix}$$

$\underline{p}$ and $\underline{r}$ being vectors of parameters of the denominator and numerator of the plant, respectively.

From Equation (3.23), considering k(z) and h(z) as controller polynomials, we can write

$$k(z)p(z) + h(z)r(z) = q(z)[p(z) - p^*(z)]$$

In this example we have chosen:

$$p(z) = z^2 - 2z + 0.75$$

52

$$r(z) = z + 2$$

$$q(z) = z^2 - 0.3z - 0.28$$

$$p*(z) = z^2 - 1.1z + 0.3$$

By the constraints on the polynomials for solvability of the Diophantine equation, we choose k and h to be first order polynomials as:

$$k(z) = k_1 z + k_0$$

$$h(z) = h_1 z + h_0$$

Substituting these polynomials into the Diophantine equation in matrix form yields:

$$
\begin{bmatrix} k_0 \\ h_0 \\ k_1 \\ h_1 \end{bmatrix}^T
\begin{bmatrix} 0.75 & -2 & 1 & 0 \\ 2 & 1 & 0 & 0 \\ 0 & 0.75 & -2 & 1 \\ 0 & 2 & 1 & 0 \end{bmatrix}
=
\begin{bmatrix} -0.126 \\ 0.117 \\ 0.72 \\ -0.9 \end{bmatrix}^T
$$

Since the plan does not have any pole-zero cancellation,
the determinant of the matrix S_m is not equal to zero. Hence,
it is solvable. Solving the above matrix equation, we compute
the control parameters $k_1 = -.899$, $k_o = -0.688$, $h_1 = -0.3900$
and $h_o = 0.195$. The corresponding polynomials of the con-
troller are:

$$k(z) = -.899z - 0.688$$

$$h(z) = 0.39z + 0.195$$

This corresponds to the optimal choice of compensator
parameters for the desired pole placement. Therefore the
compensator given by the difference equation

$$u(t) = \frac{k(D)u(t) + h(D)y(t)}{q(D)} + v(t)$$

yields closed-loop transfer function

$$H(z) = \frac{Y(z)}{V(z)}$$

$$= \frac{q(z)r(z)}{p(z)[q(z) - k(z)] - r(z)h(z)}$$

which becomes:

$$H(z) = \frac{z + 2}{z^2 - 1.1z + 0.3}$$

54

The step response of this system is given in Figure 4.1.
The next approach to the problem is simulation of the system
using a computer program. It is observed that from the simu-
lations, after the 10n iterations, the estimated parameter
will be closer to $\theta*$ and $\tilde{\theta}$ will tend to zero, where

$$\tilde{\theta} \;=\; ||\theta* - \hat{\theta}||$$

This means that $\hat{p}$ and $\hat{r}$ are converging to the actual param-
eters, and $\hat{h}$ and $\hat{k}$ converge to the actual values for the
desired pole-placement. The desired output and controlled
system's output are given in Figure 4.2. Also, parameter
error and output prediction error are given in Figures 4.3
and 4.4, respectively. After convergence of the prediction
error to zero, the persistency of excitation added to the
external command is turned off. In this example, we have
chosen the step as external command. External input and plant
input are in Figures 4.5 and 4.6, respectively.

If we compare Figures 4.1 and 4.2, analytical and simu-
lated system's results are almost the same.

In the next example, it is considered that one of the
plant parameter is changed after some period of time. It is
investigated how the system behavior will change in this
condition.

Example 4.2:

Let the plant be the same as the one in the previous
example. After two blocks length, the zero of the plant is
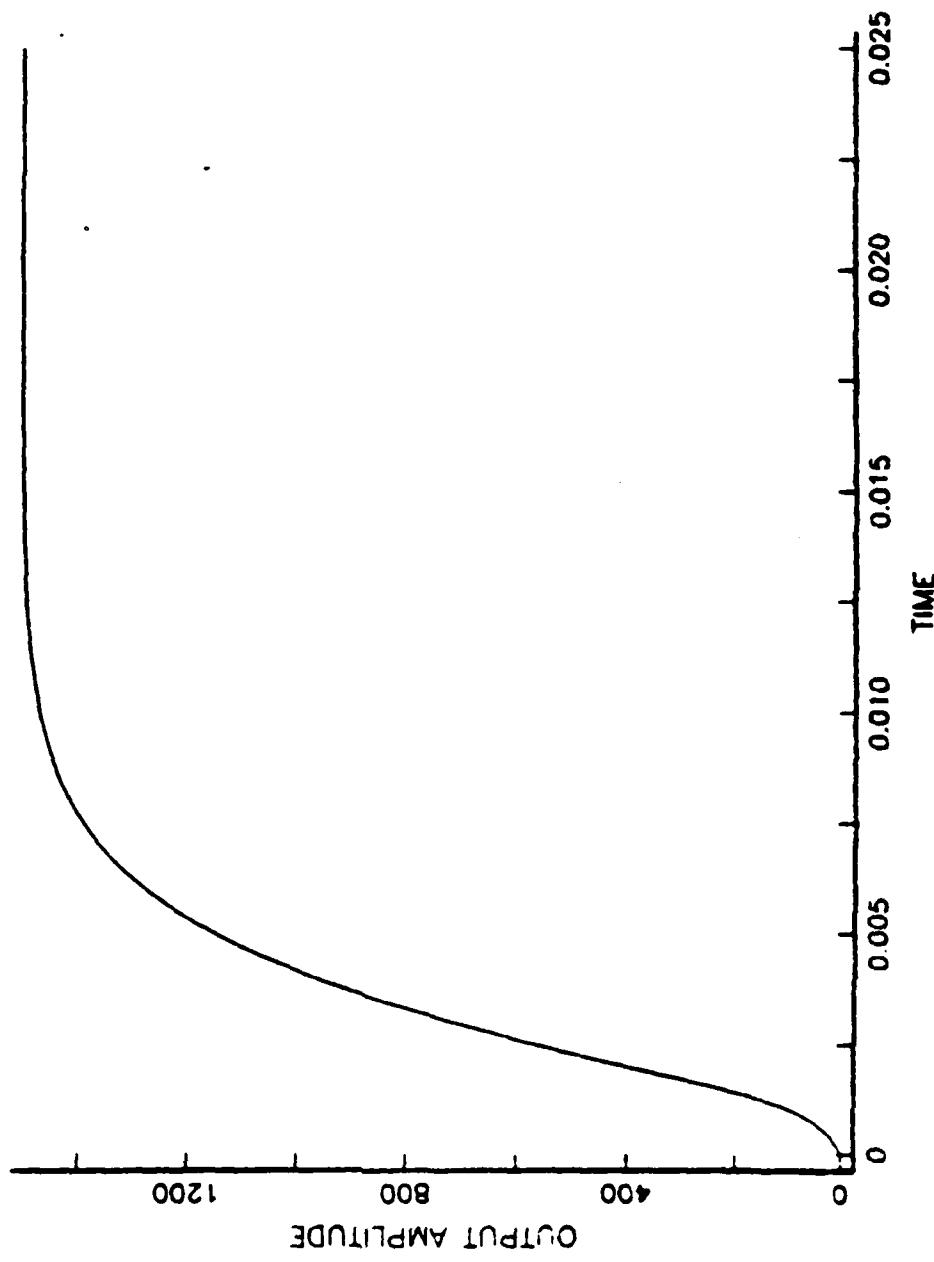
Figure 4.1. Step Response of the Closed-Loop System (Example 1)

PLANT AND MODEL OUTPUTS
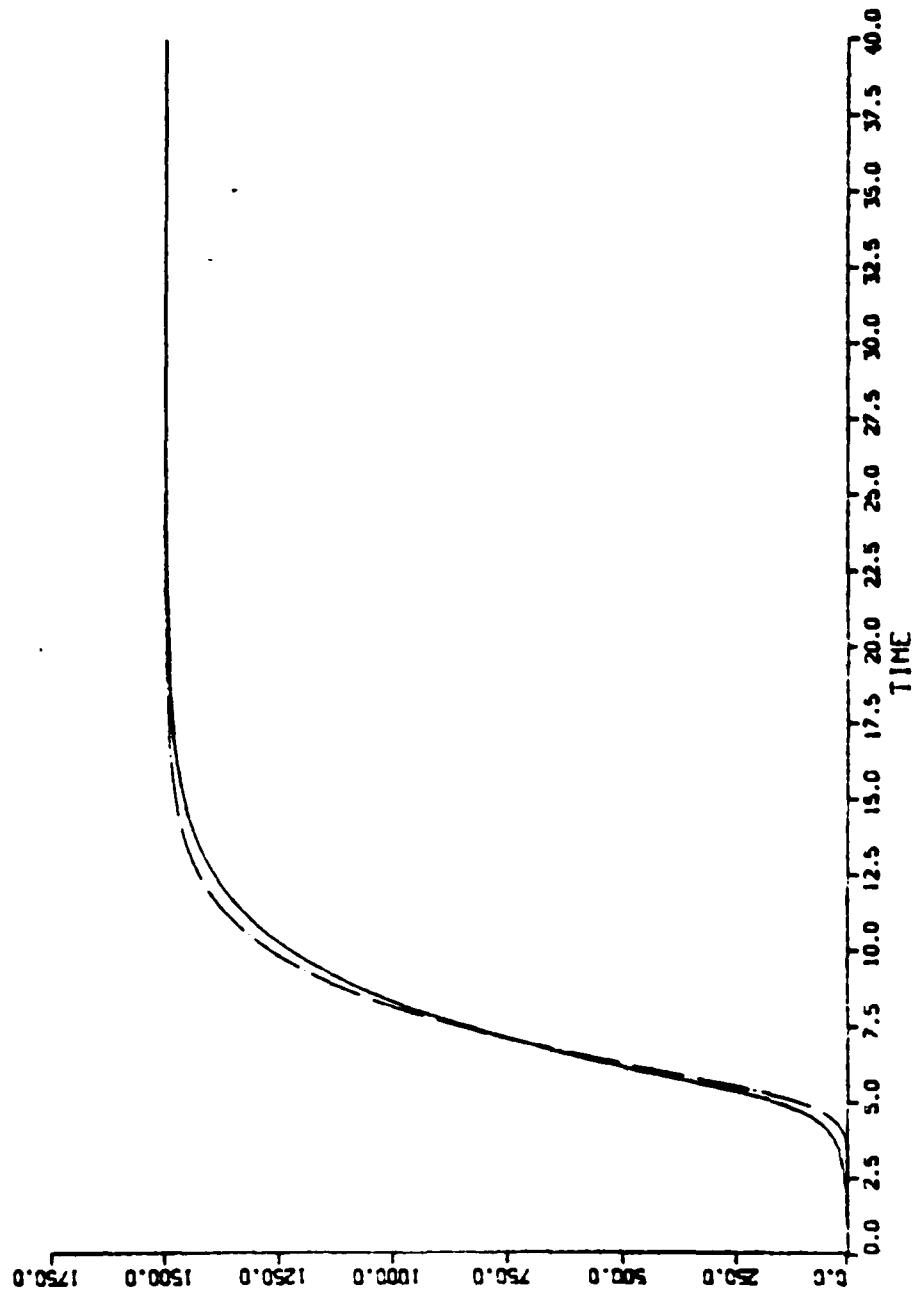
Figure 4.2. Plant and Model Outputs vs. Time (Example 1)
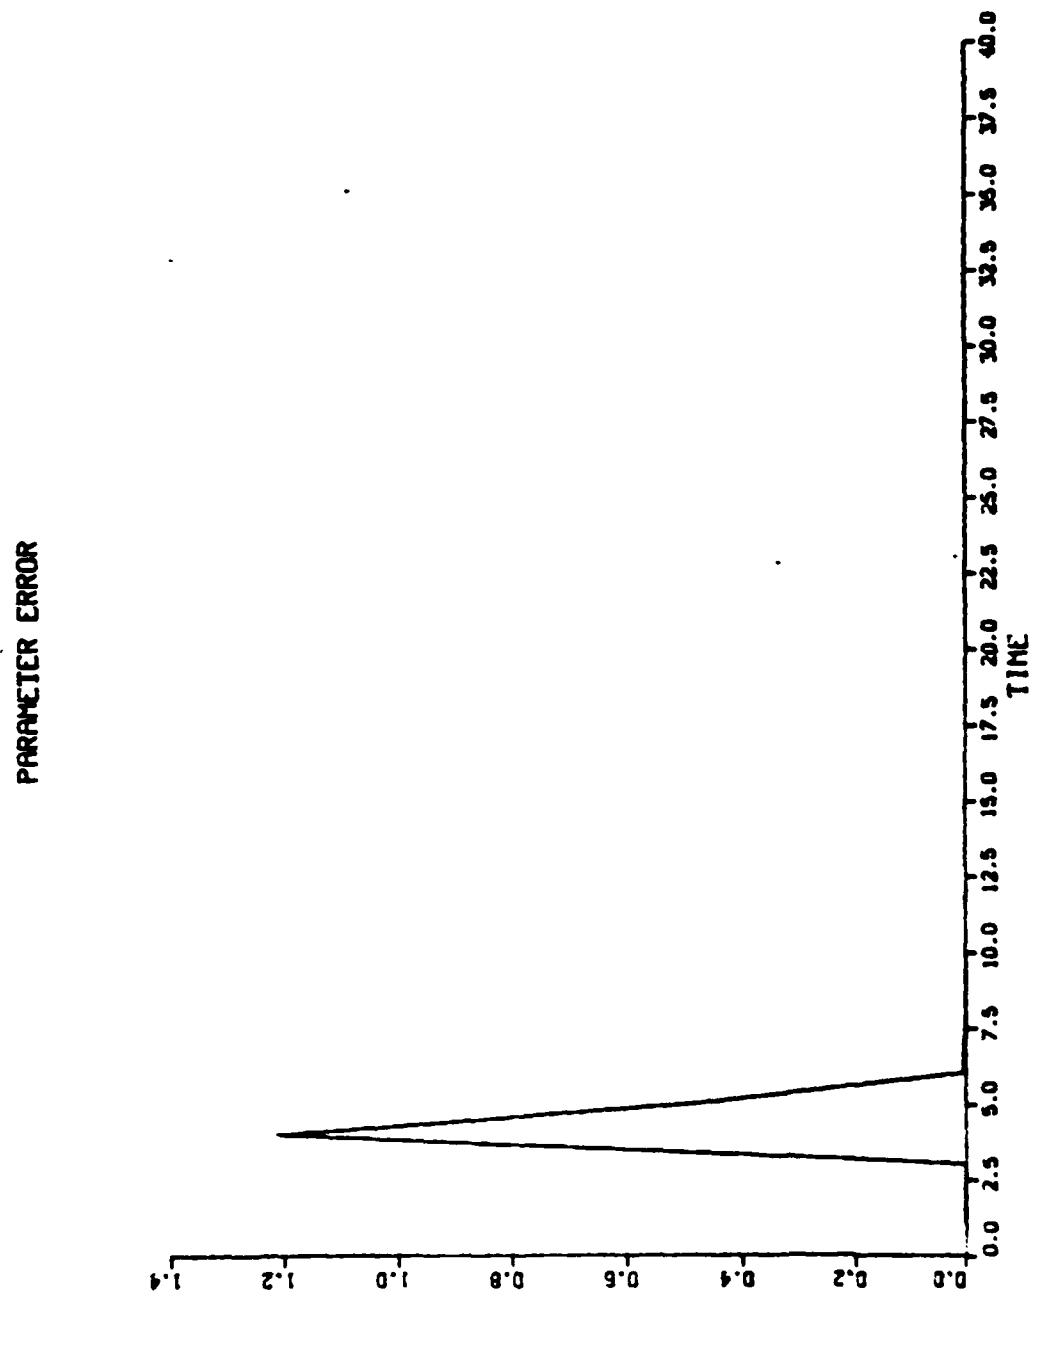
Figure 4.3. Parameter Error vs. Time (Example 1)
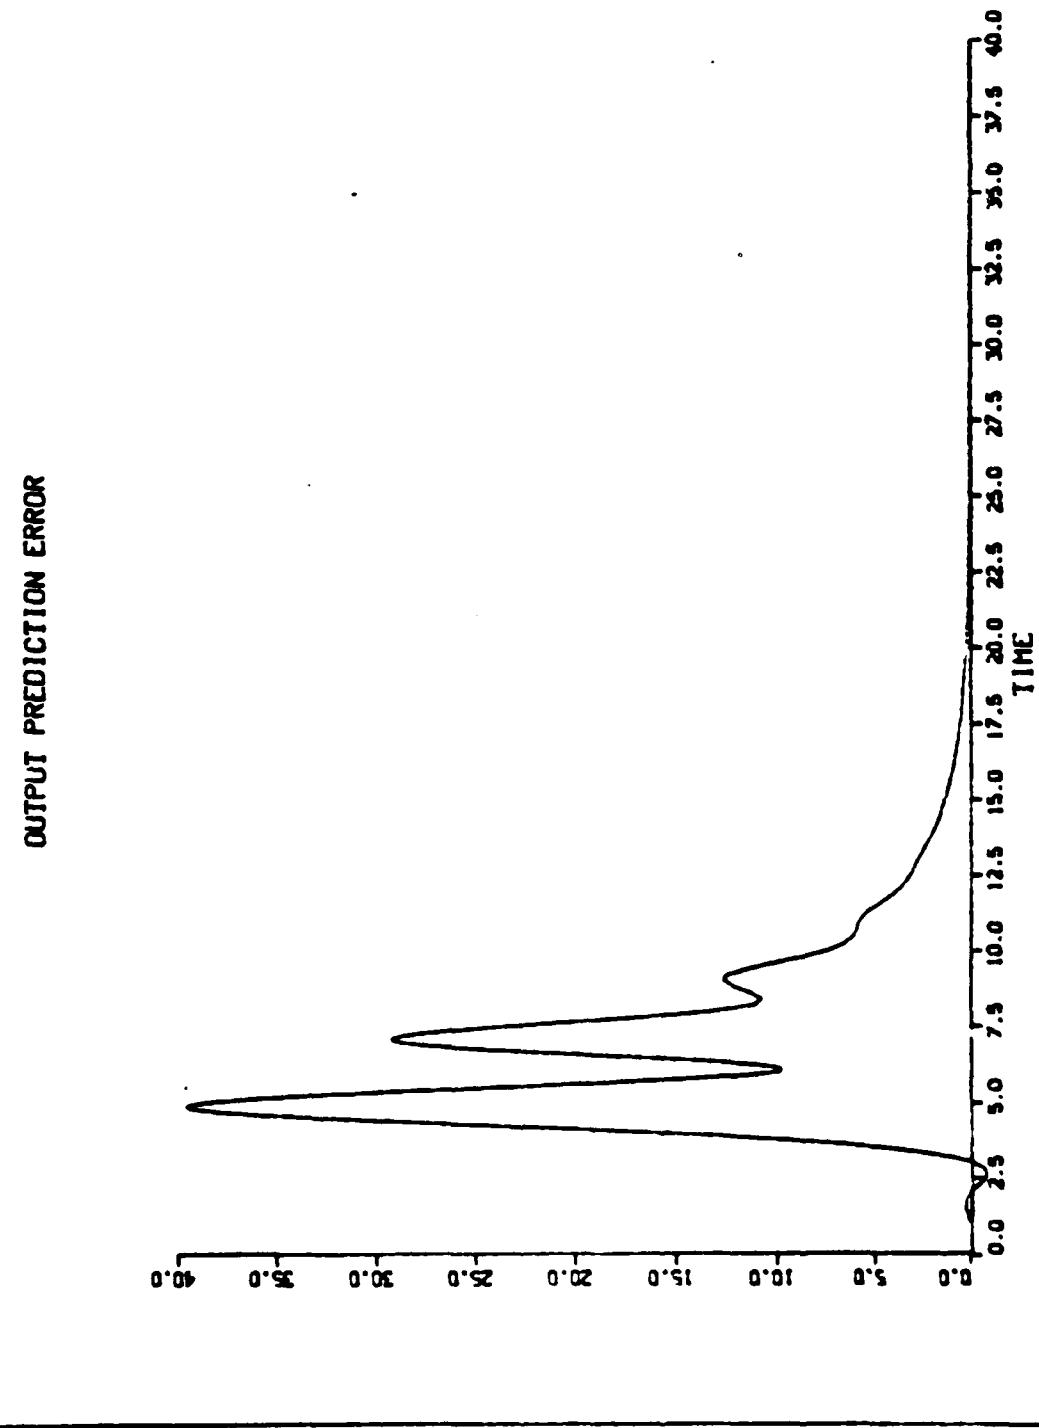
Figure 4.4. Output Prediction Error vs. Time (Example 1)
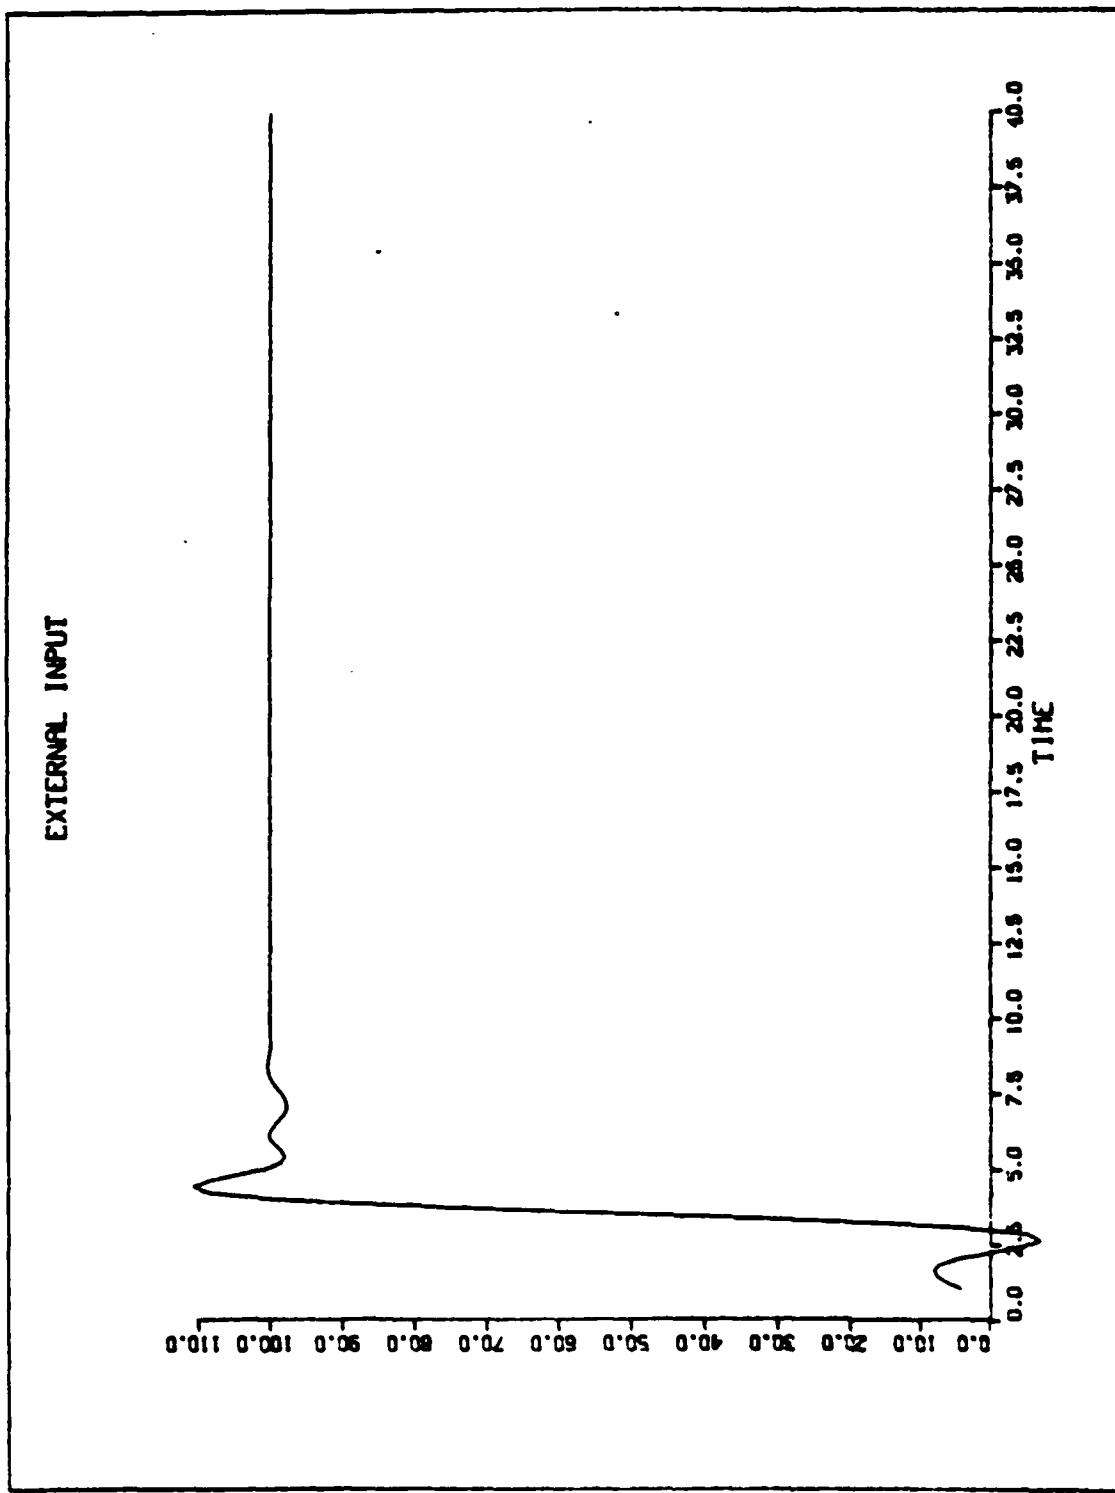
Figure 4.5. External Input vs. Time (Example 1)
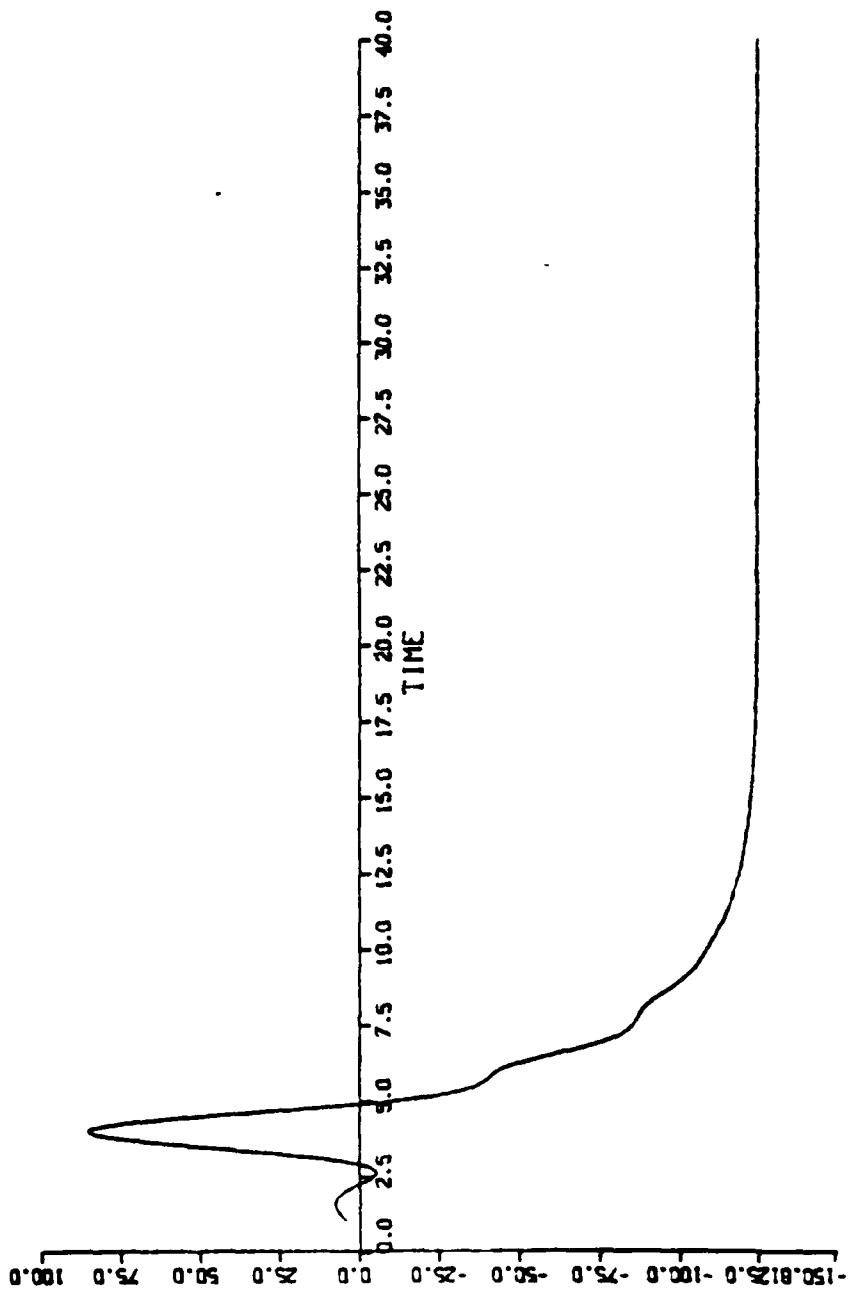
Figure 4.6. Plant's Input vs. Time (Example 1)

perturbed from z = -2 to z = -3. To compute the parameters

associated to the perturbed plant with pulse transfer function

$$H(z) \quad = \quad \frac{z + 3}{z^2 - 2z + 0.75}$$

write its difference equation as

$$y(t) \quad = \quad 2y(t-1) - 0.75y(t-1) + u(t-1) + 3u(t-2)$$

and immediately

$$\theta* \quad = \quad \begin{bmatrix} -2.0 \\ 0.75 \\ 1.0 \\ 3.0 \end{bmatrix}$$

By using the same observer and desired polynomials $g(z)$,
$p*(z)$ and following the same steps as in Example 4.1, the
controller parameters become $k_1 = -0.894$, $k_o = -0.778$,
$h_1 = -0.305$ and $h_o = 0.152$.

Then, the polynomials $k(z)$ and $h(z)$ are:

$$k(z) \quad = \quad -.894z - 0.778$$

$$h(z) \quad = \quad -0.305z + 0.152$$

The closed loop transfer function becomes:

62

$$H(z) = \frac{z + 3}{z^2 - 1.1z + 0.3}$$

. The step response of this transfer function is given in Figure 4.7. Also, the other graphical results are in Figures 4.8-4.12.

In the next example, we investigate how the disturbance at the output will affect the behavior of the controlled system.

Example 4.3:

Consider a plant with pulse transfer function as:

$$H(z) = \frac{z + 2}{z^2 - 2z + 0.75}$$

and assume an output disturbance exists. Let the disturbance be sinusoidal with frequency $5\pi/2$ rad/sec. In this case, it is observed that the estimated parameters of the plant don't converge to the actual parameters. Corresponding plots are given in Figure 4.13 through 4.17. However, if the disturbance is small, the parameters converge close to the actual values and we can still obtain satisfactory performances.

Comparison of Different Estimation Techniques: RLS and P.A.

In the above examples we used a recursive least-squares algorithm for estimating the plant parameters. In this section, we compare the behavior of the indirect adaptive control, when the projection algorithm is used.

The projection algorithm has the advantage of requiring less computations. Approximately, the number of computations

63
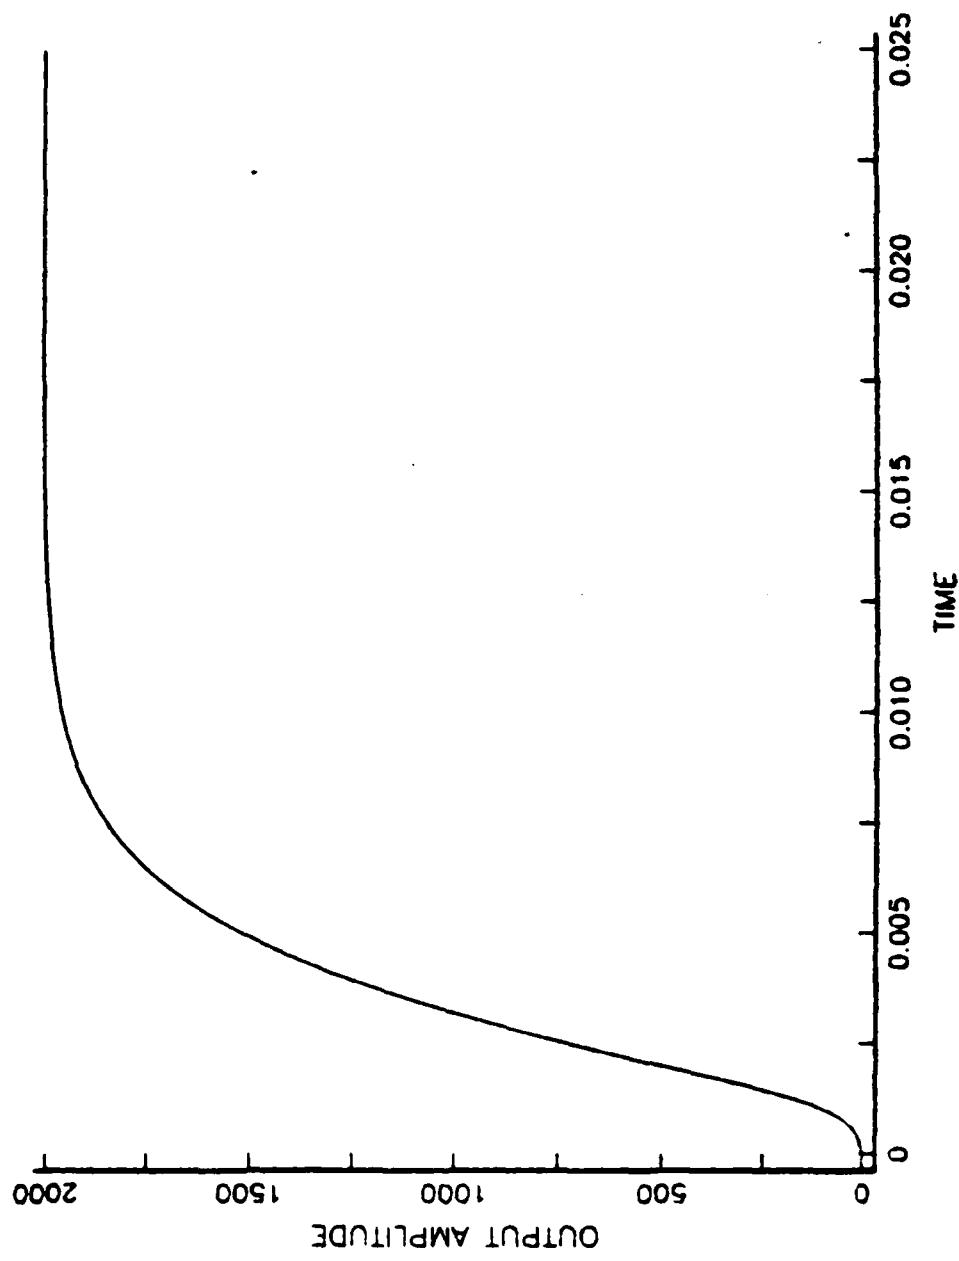
Figure 4.7. Step Response of the Closed-Loop System (Example 2)

OUTPUT AMPLITUDE

TIME

2000 1500 1000 500 0

0 0.005 0.010 0.015 0.020 0.025
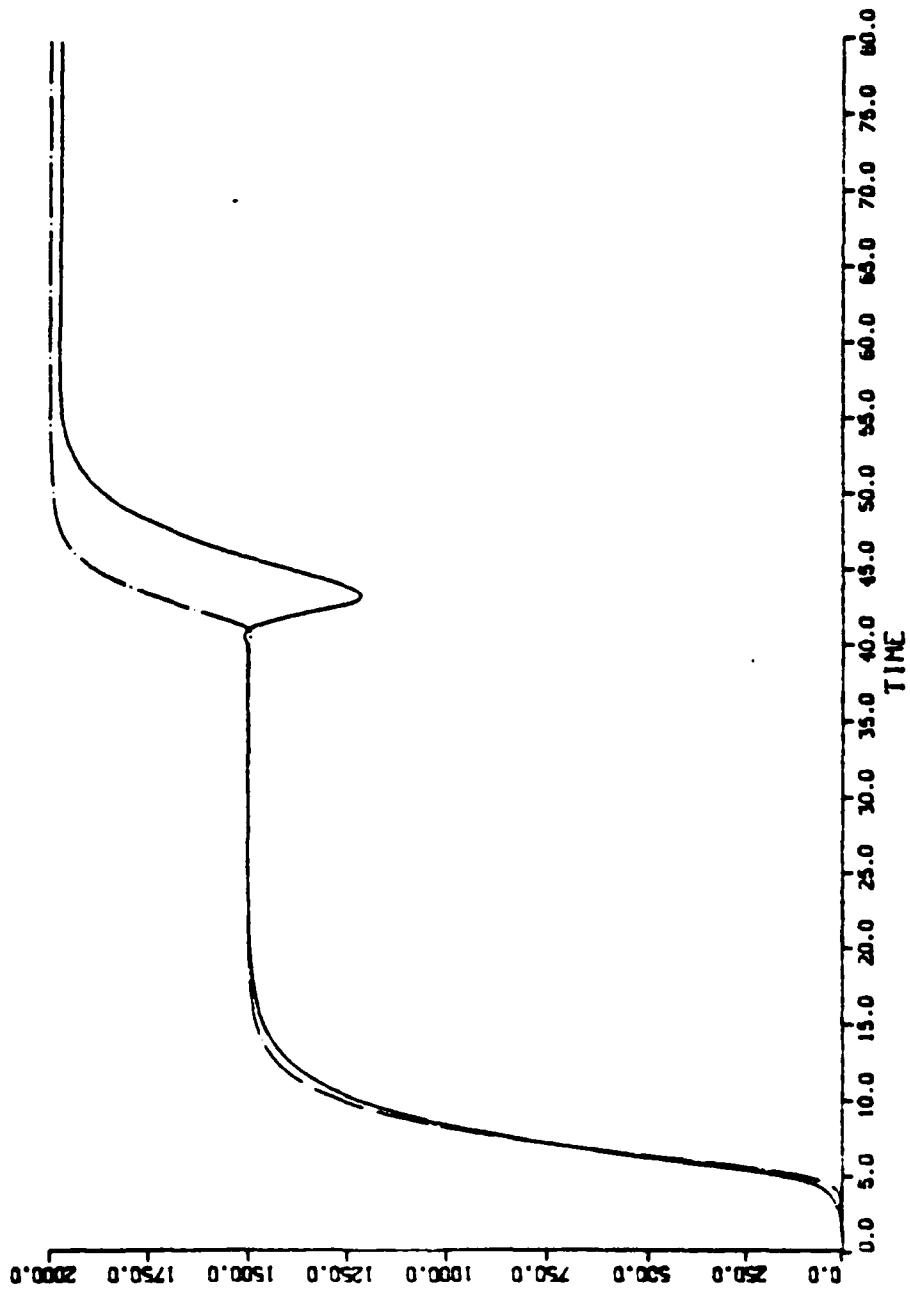
Figure 4.8. Plant and Model Outputs vs. Time (Example 2)
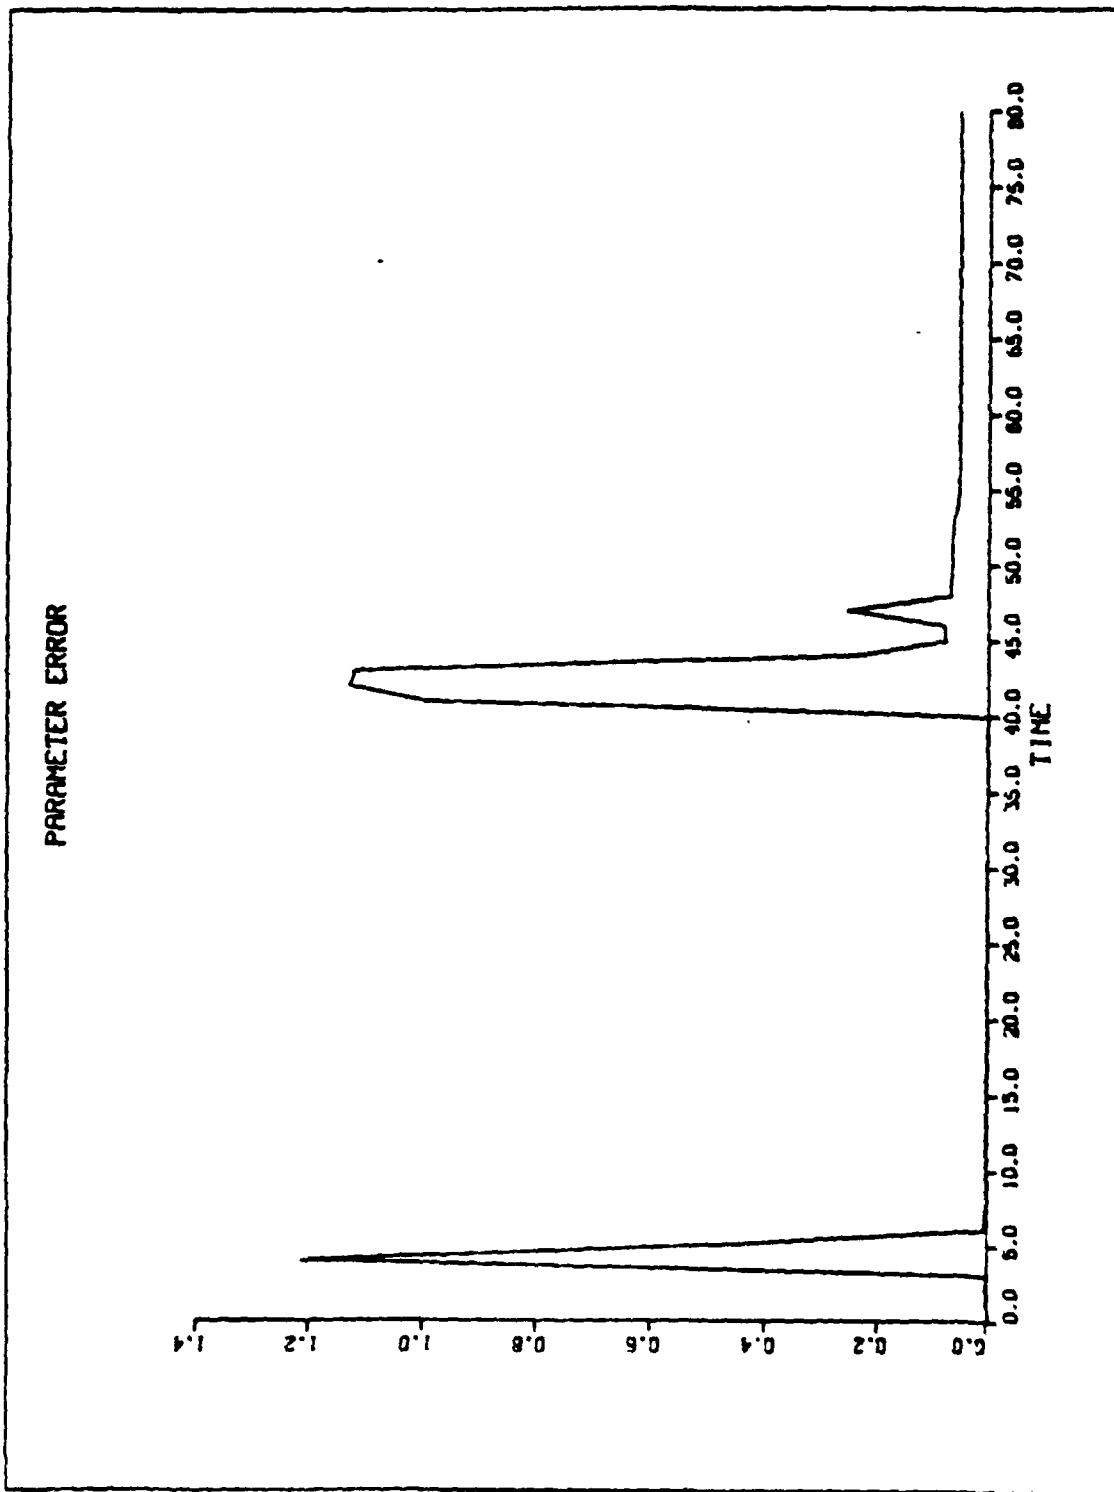
PARAMETER ERROR

Figure 4.9. Parameter Error vs. Time (Example 2)

66
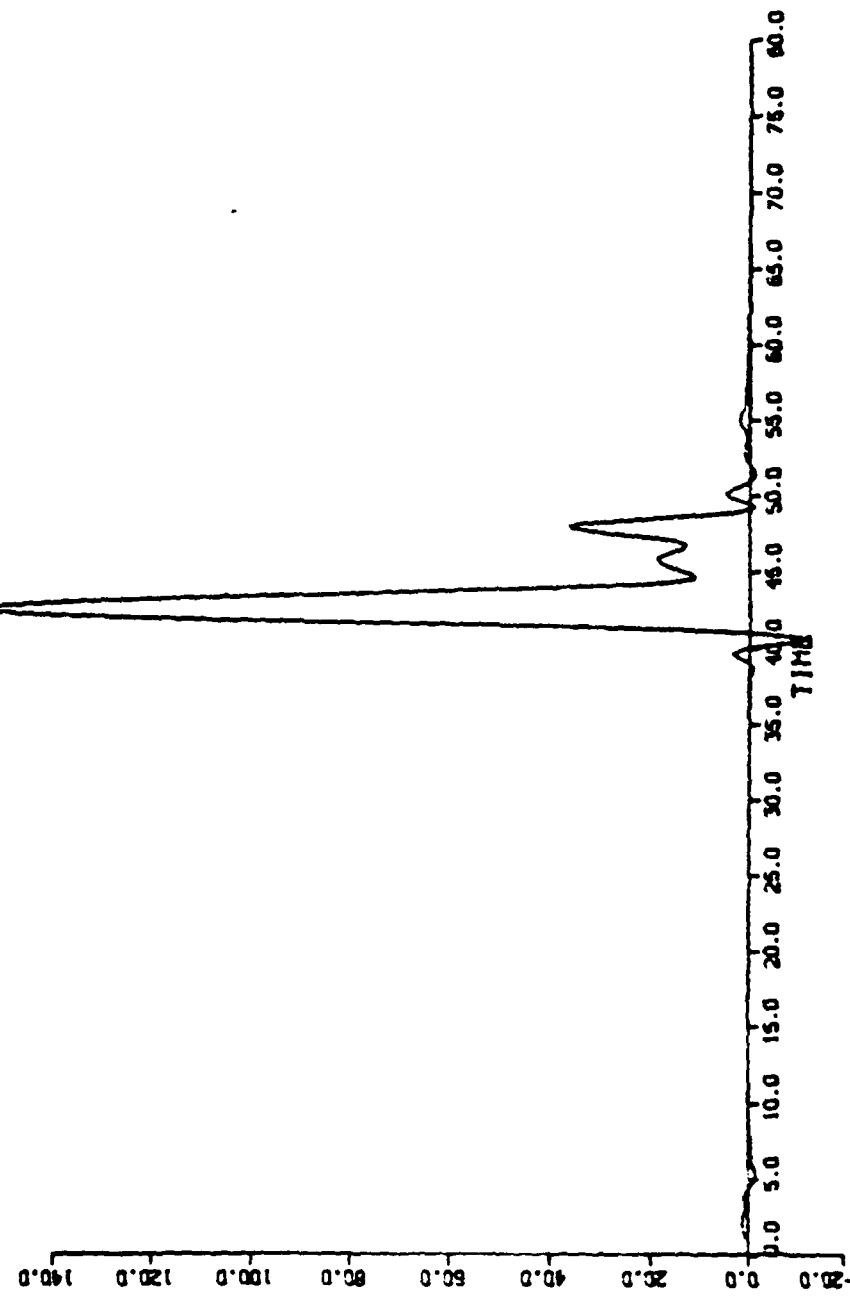
Figure 4.10. Output Prediction Error vs. Time (Example 2)
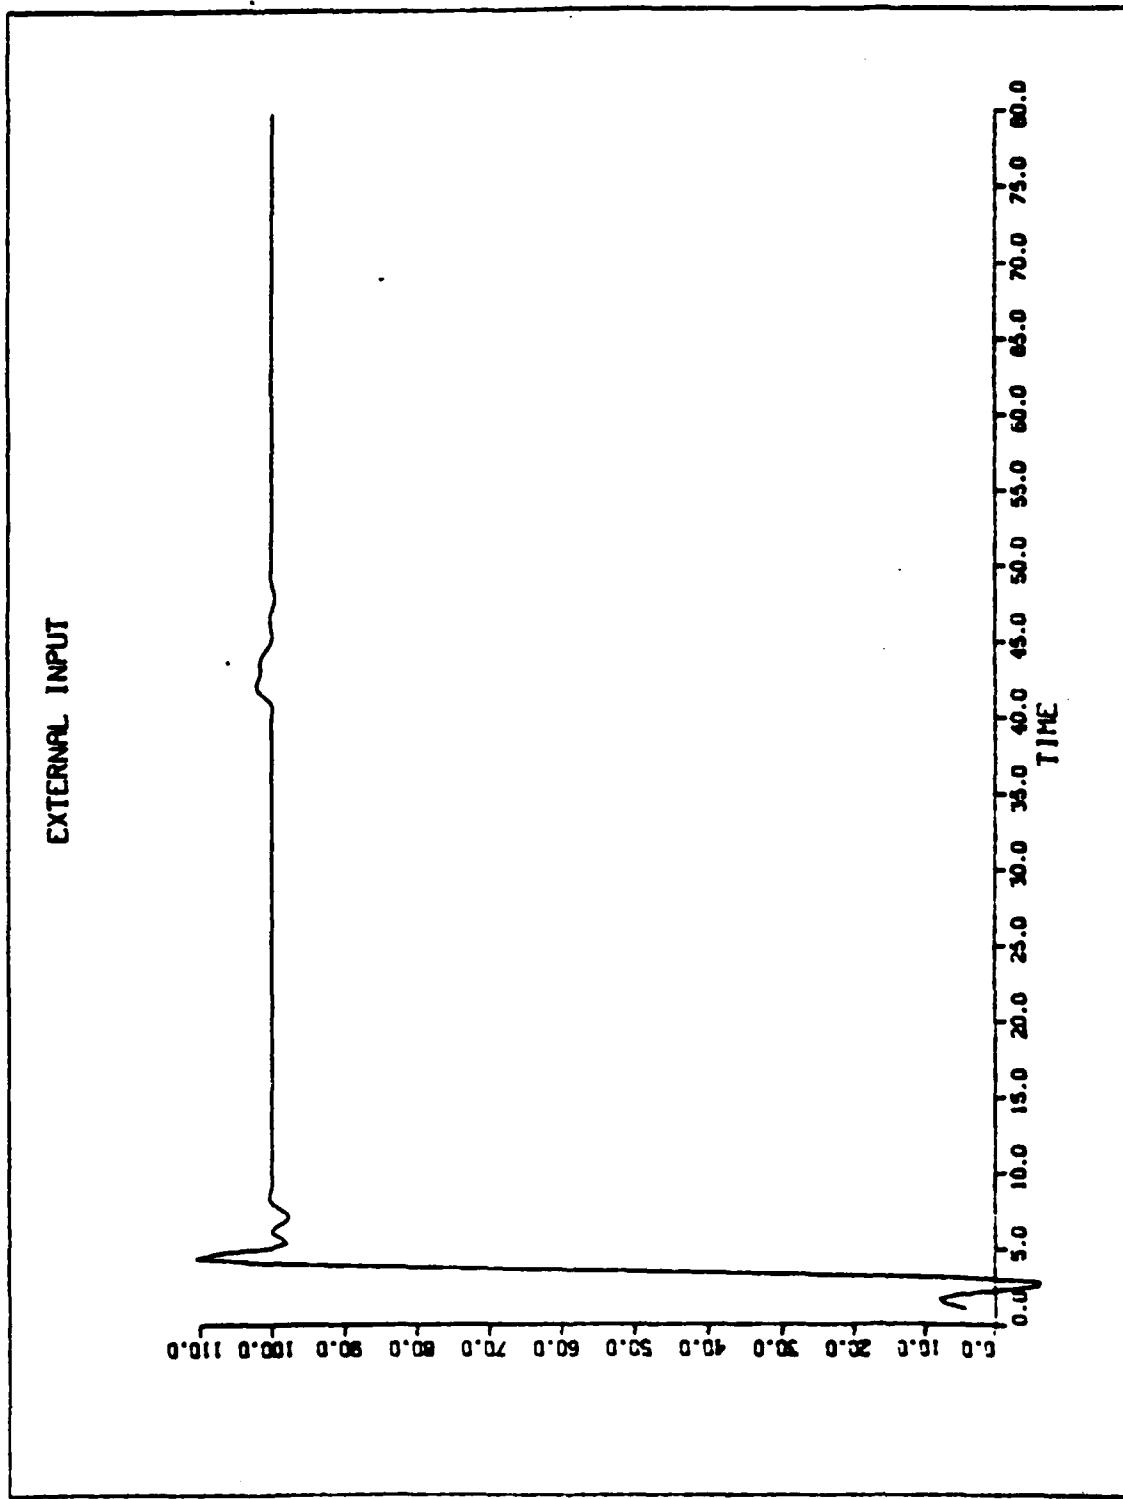
Figure 4.11. External Input vs. Time (Example 2)
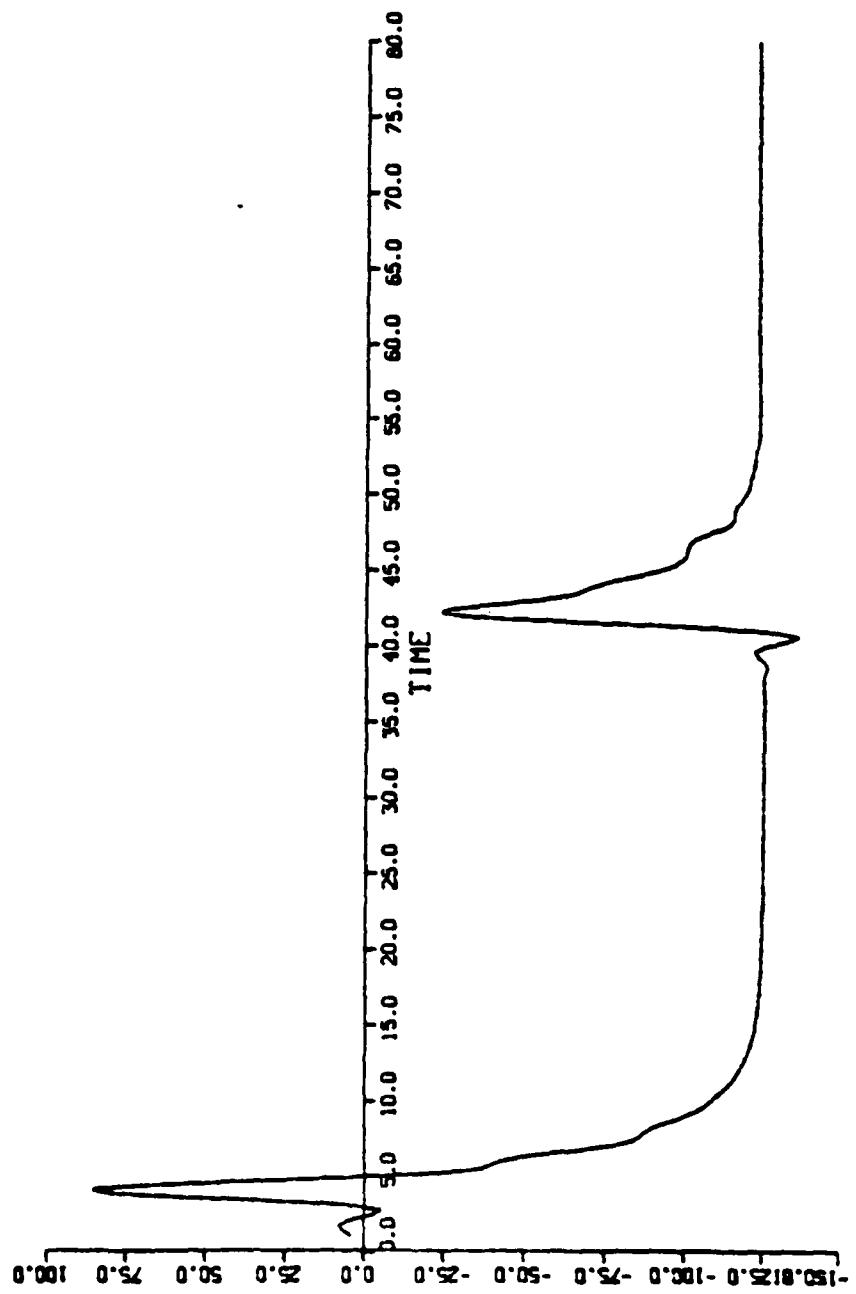
Figure 4.12. Plant's Input vs. Time (Example 2)

PLANT AND MODEL OUTPUTS
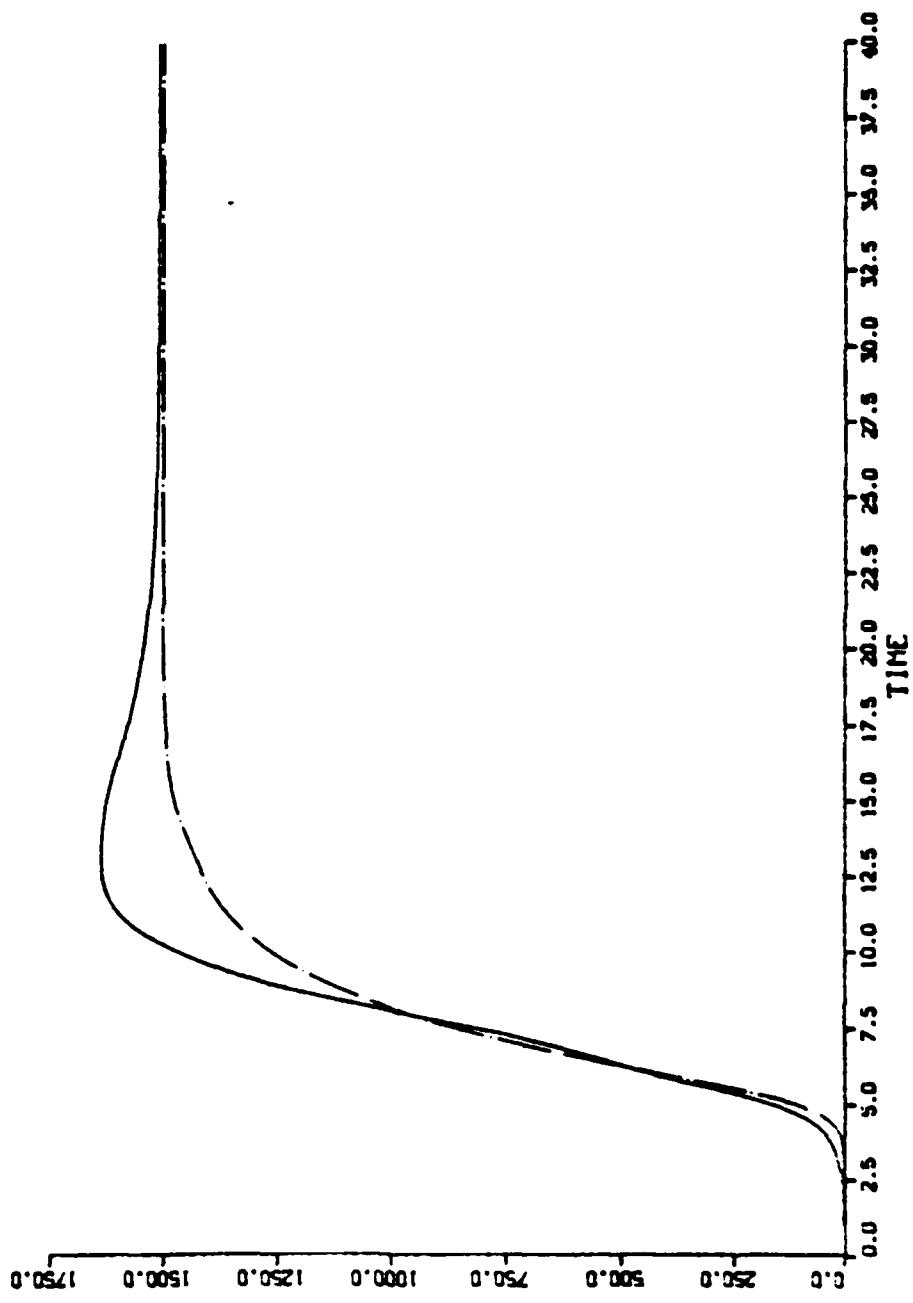
Figure 4.13. Plant and Model Outputs vs. Time (Example 3)
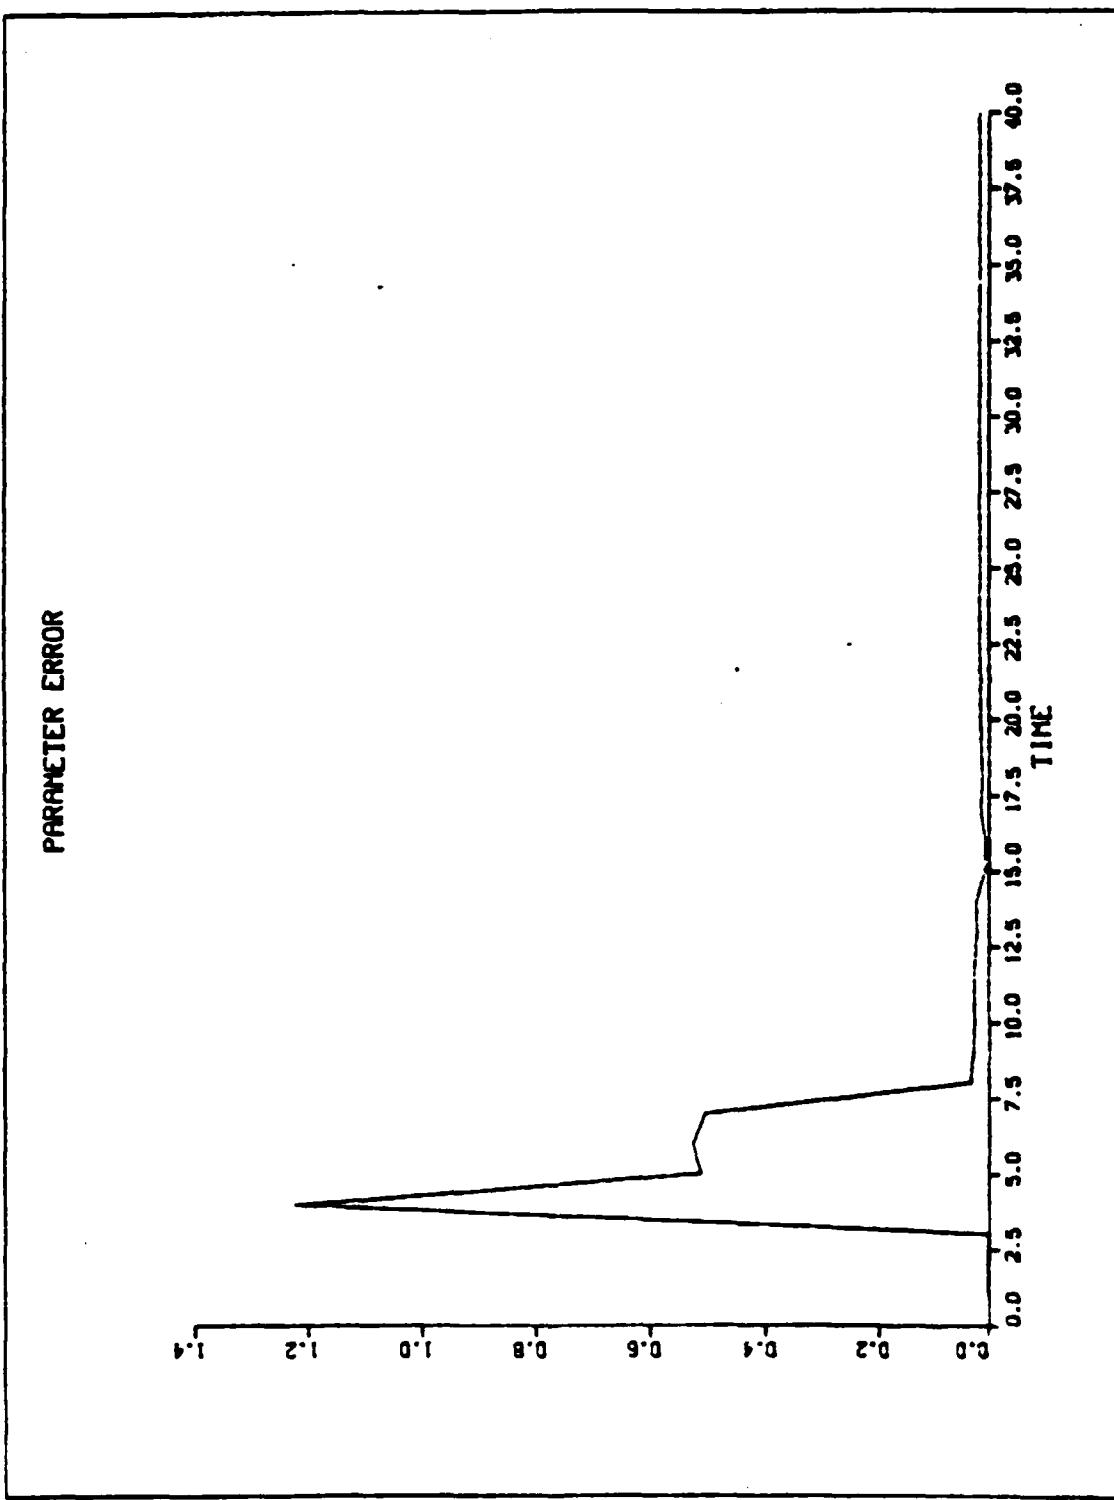
Figure 4.14. Parameter Error vs. Time (Example 3)

71
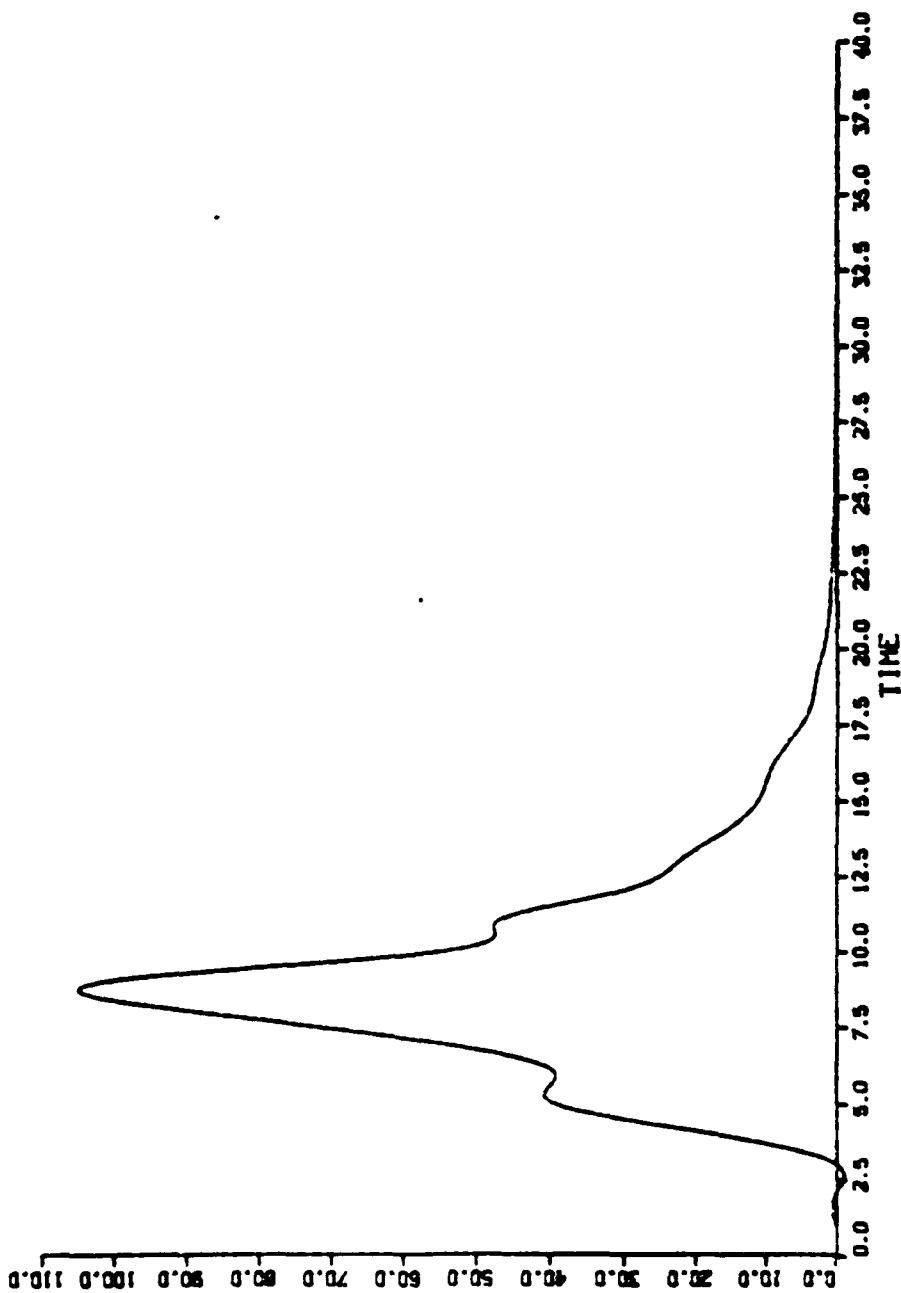
Figure 4.15. Output Prediction Error vs. Time (Example 3)
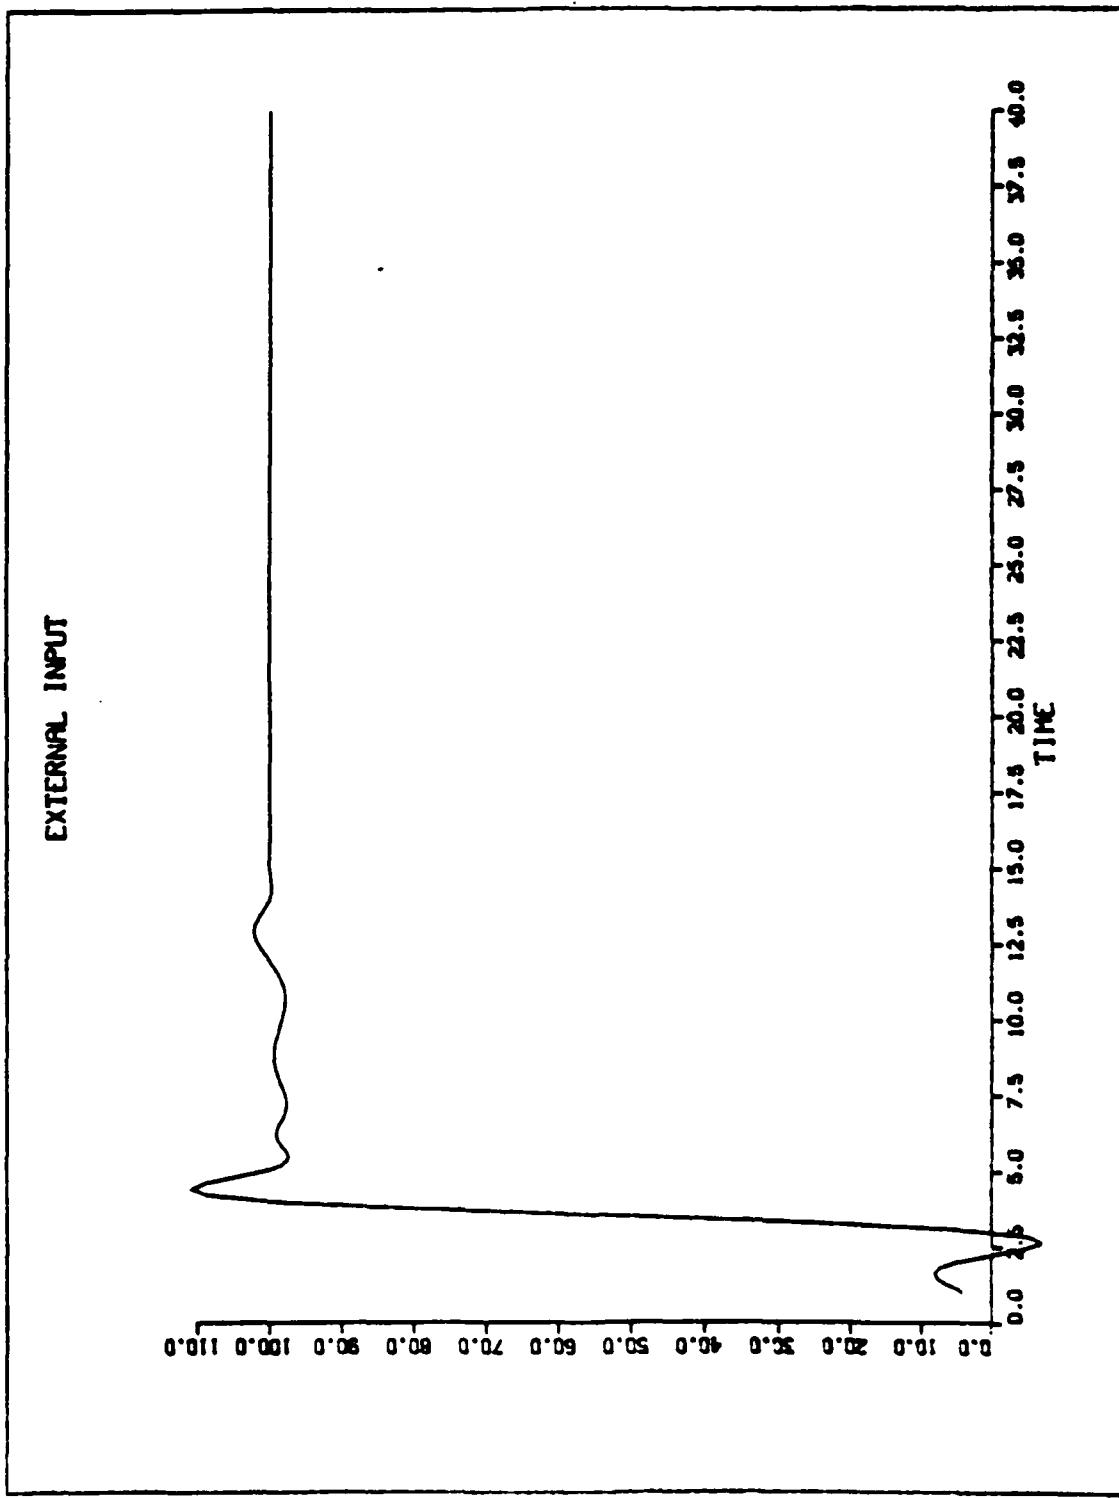
Figure 4.16. External Input vs. Time (Example 3)

73
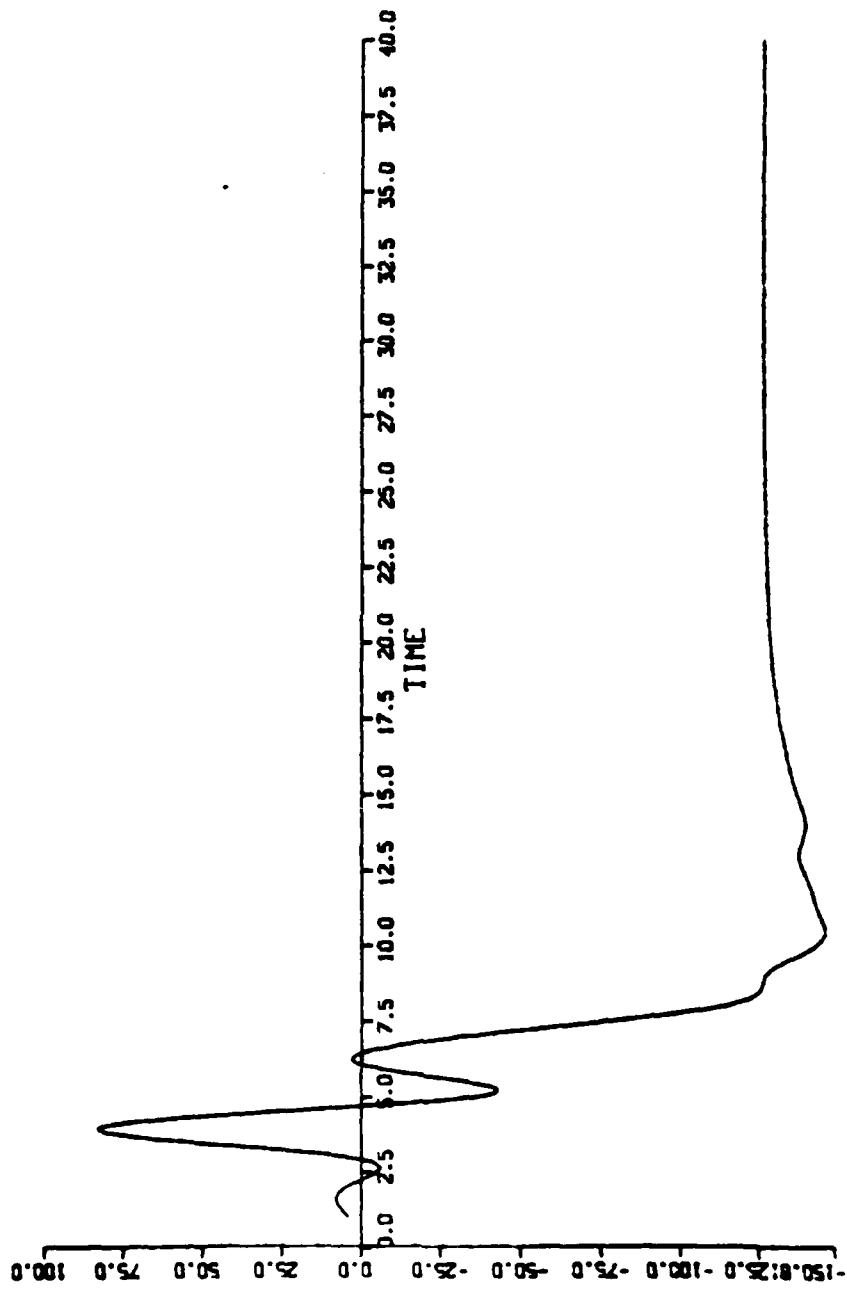
Figure 4.17. Plant's Input vs. Time (Example 3)

grows as n^2 in the recursive least-squares algorithm. But in the projection algorithm, it grows as n. As noted before, the projection algorithm can be described as

$$\hat{\theta}(t) = \hat{\theta}(t-1) + \frac{a\phi(t-1)}{c + \phi(t-1)^T \phi(t-1)}[y(t) - \phi(t-1)^T \hat{\theta}(t-1)]$$

with $c > 0$ and $0 < a < 2$. The value of the parameter a is crucial. The behavior os the algorithm greatly depends on its value.

In the next example, the projection algorithm is used for estimation procedure on the previous process.

Example 4.4:

Using the same pulse transfer function and controller polynomials as in Example 4.3 and choosing the constants $a = 1$ and $c = 1$ in the above equation, results can be observed from Figure 4.18 through 4.22.

Actually, using this algorithm, several systems have been simulated. This result is the most reasonable one.

Considering the above results, indirect adaptive control is a very effective control technique when the parameters of the plant are unknown and large and unpredictable variations occur in the plant dynamics. Also, it is applicable to nonminimum-phase systems. This can be considered as a big advantage of the method.

75
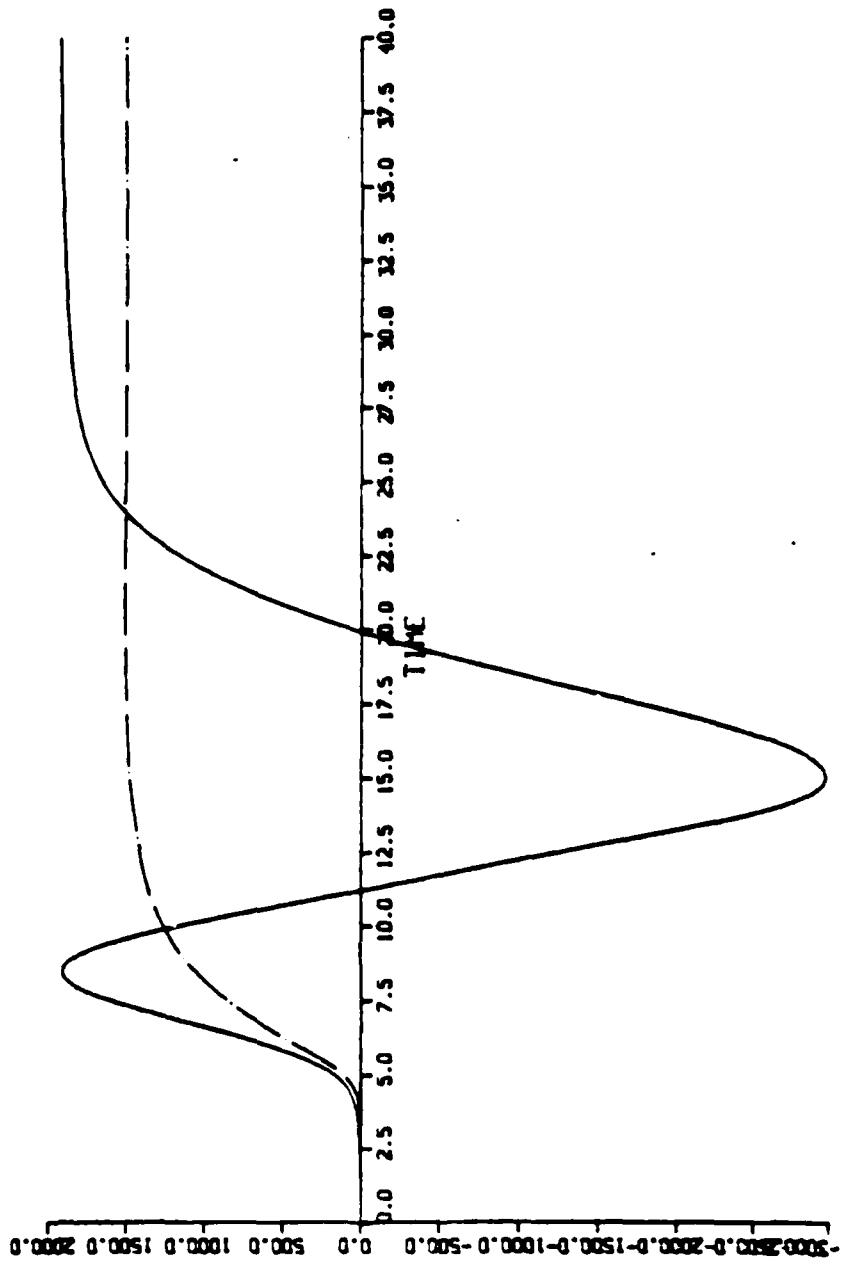
Figure 4.18. Plant and Model Outputs vs. Time (Example 4)
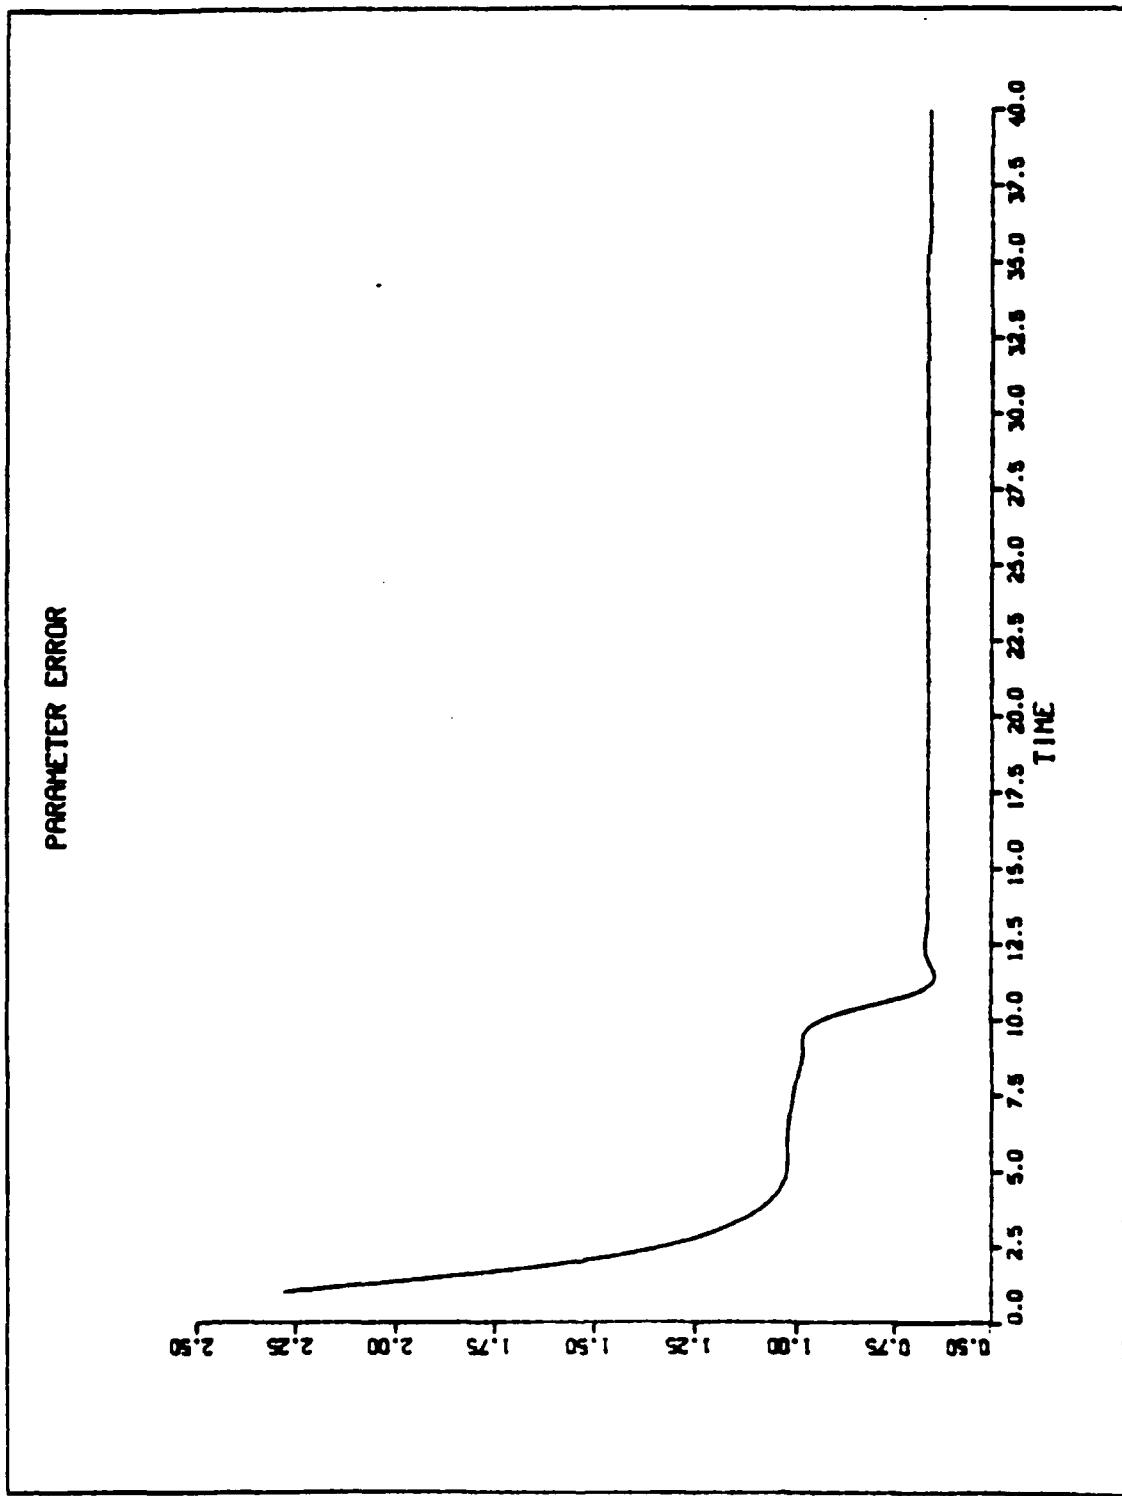
PARAMETER ERROR

Figure 4.19. Parameter error vs. Time (Example 4)
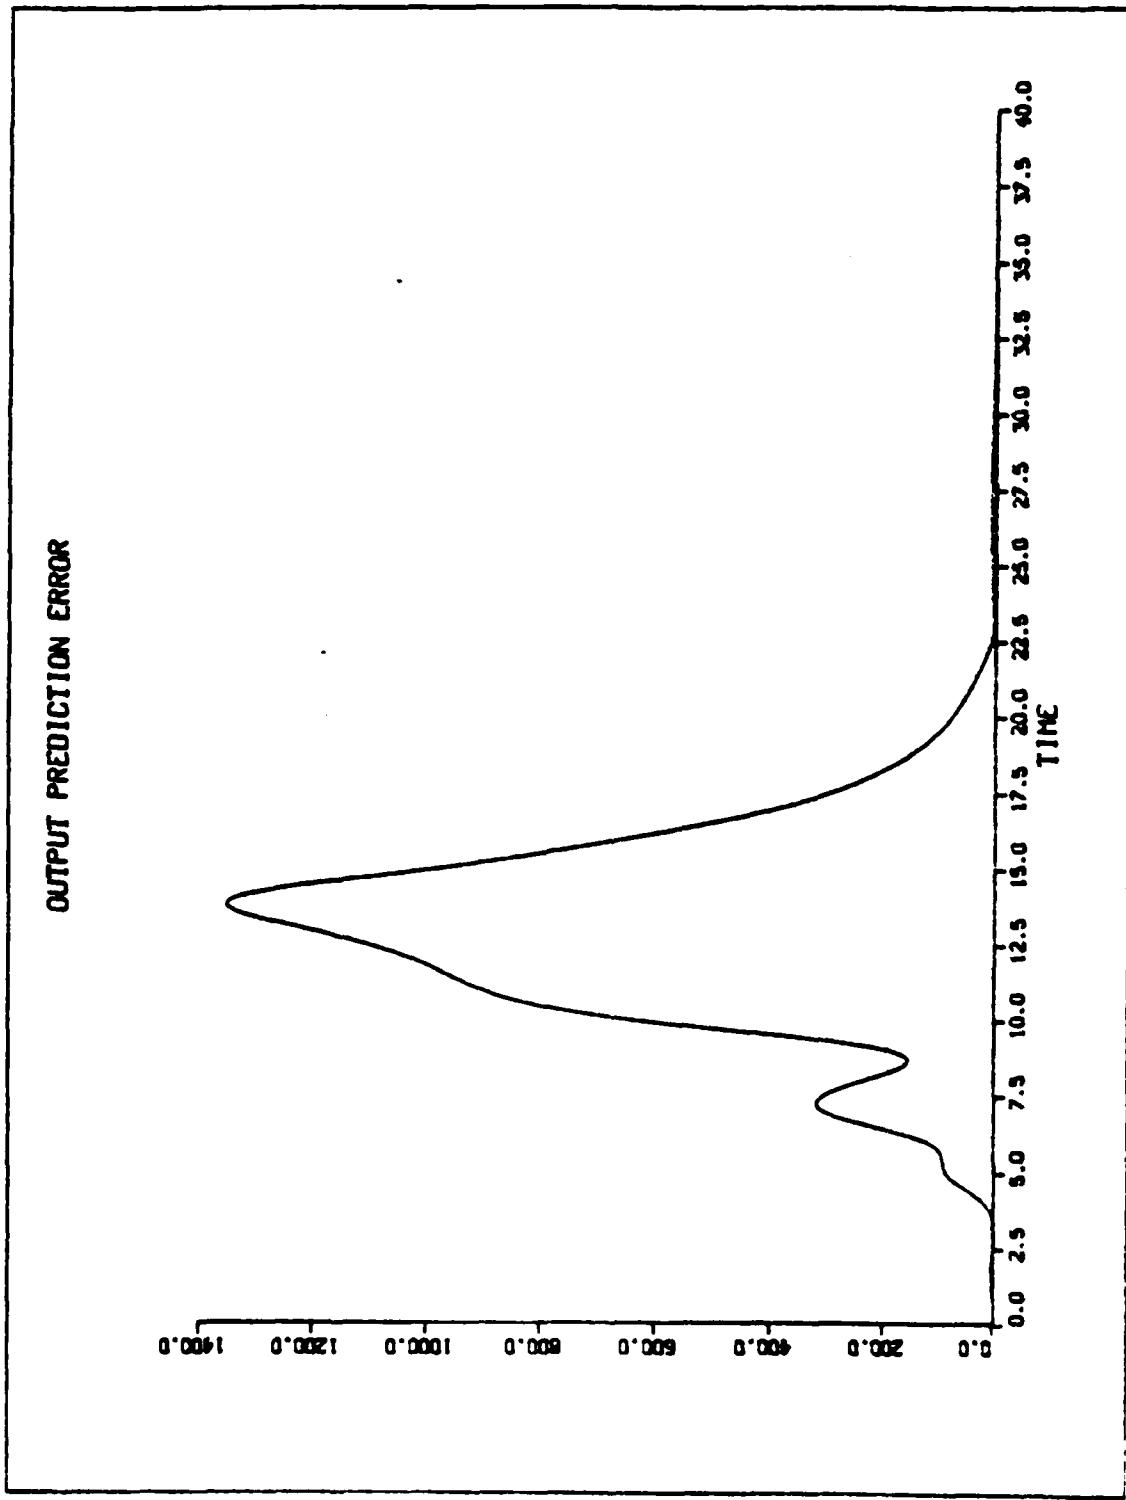
Figure 4.20. Output Prediction Error vs. Time (Example 4)
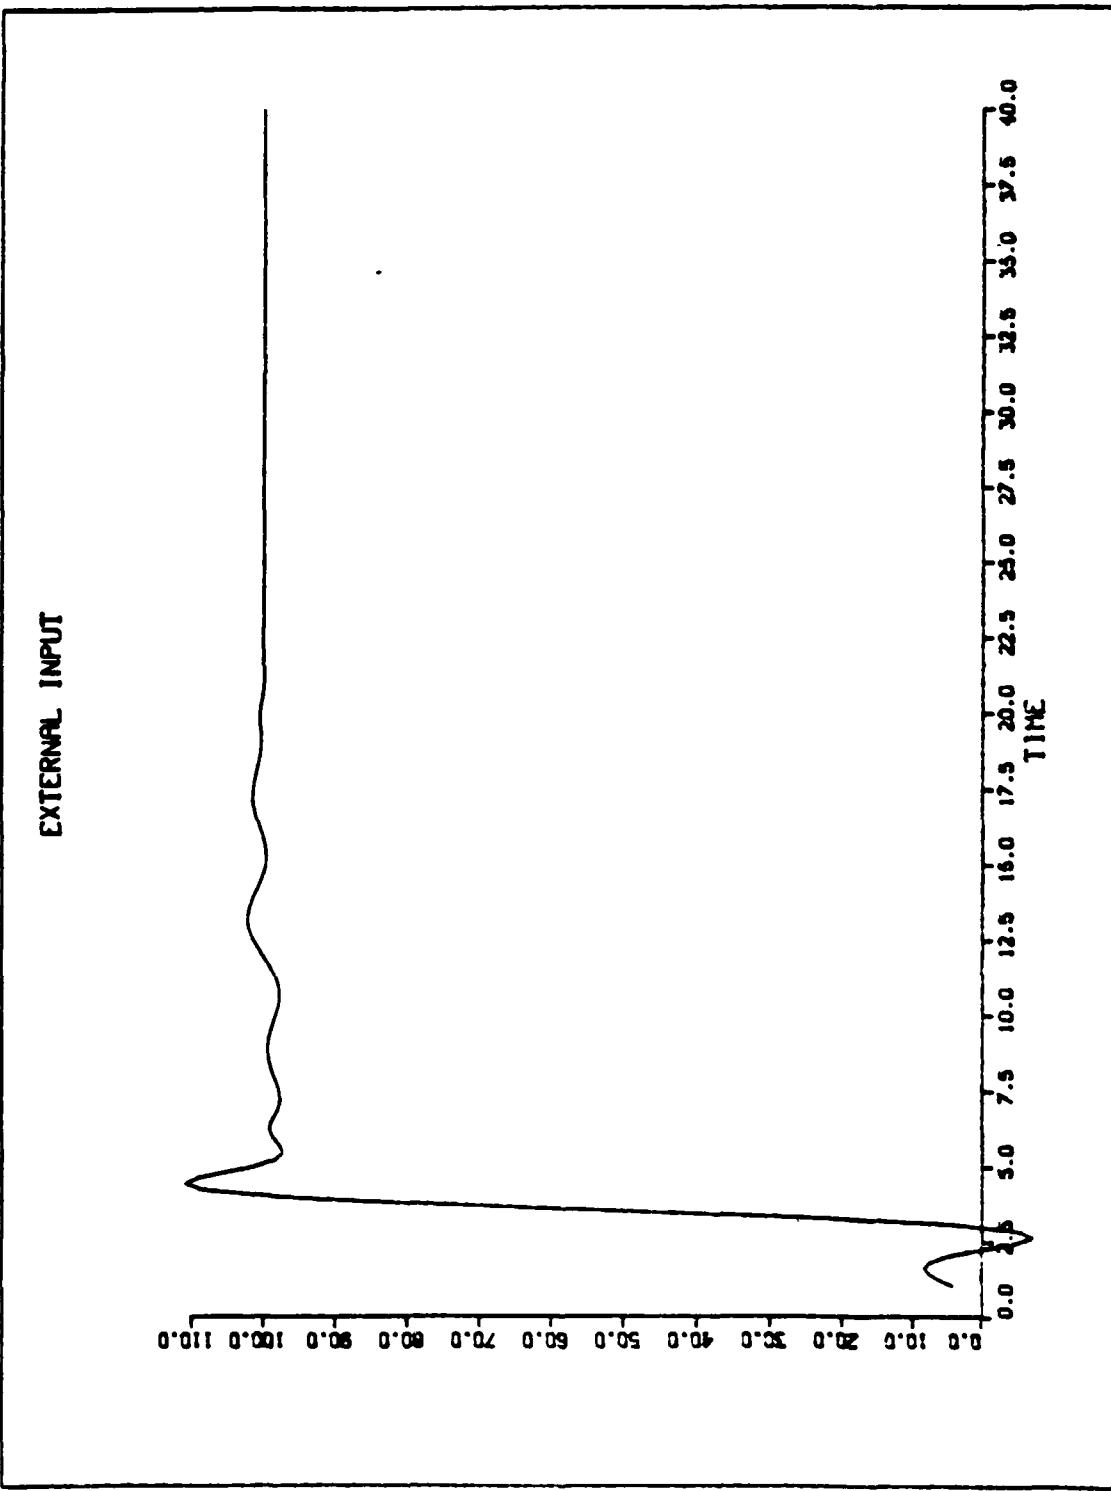
Figure 4.21. External Input vs. Time (Example 4)
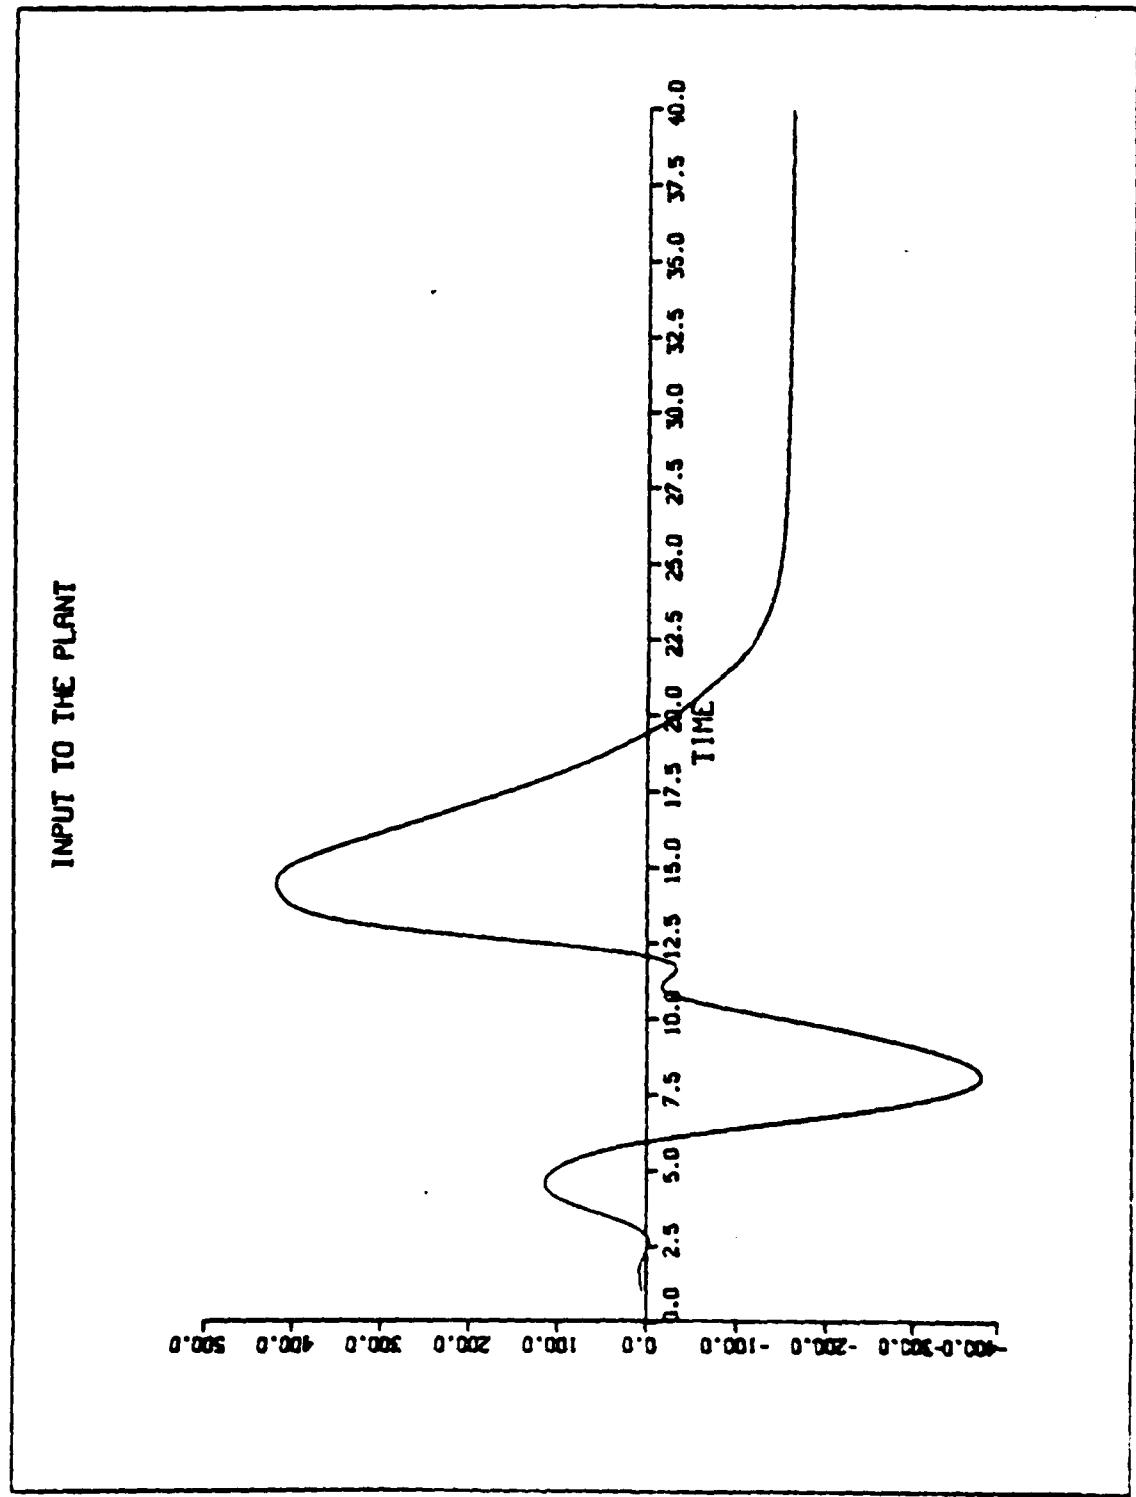
Figure 4.22. Plant's INput vs. Time (Example 4)

APPENDIX A

DESCRIPTION OF COMPUTER PROGRAMS

Computer programs are written using WATFIV and FORTRAN programming languages. All of them are prepared as an interactive program. The following explanation is about how one can use these programs.

The program named CONDIS given in Appendix B finds the pulse transfer function from the continuous time transfer function. The program asks for the sampling interval, orders and coefficients of the continuous time transfer function polynomials. The continuous time system is described in state variable form as

$$\dot{\underline{x}} = A\underline{x} + Bu$$

and the corresponding discrete time system as

$$\underline{x}(k+1) = \Phi\underline{x}(k) + \Gamma u(k)$$

This program gives the Φ and Γ matrices corresponding to A and B.

There is no limitation about the order of the system in all programs. For higher order systems, the dimensions of the declared matrices should be increased.

The program named RCIOP given in Appendix D simulates an indirect adaptive control system using the projection

81

algorithm. The program asks some questions to the user in the following order:

1. The order of a plant (N);

2. The constants a and c that are given in Equation (3.38);

3. Coefficients of the numerator polynomial of the plant (in ascending order of z);

4. Coefficients of the denominator polynial of the plant (in ascending order of z);

5. Coefficients of the controller polynomials g(z) and p*(z).

The external input is defined inside the program. It can be changed when it is necessary.

The last program RCIOR given in Appendix C is the most important one. Least-squares algorithms are used for parameter estimation. This program asks the same questions about system, except question #2.

Computer programs RCIOR and RCIOP give the graphical and tabulated results. Graphical outputs are obtained using DISSPLA.

APPENDIX B

COMPUTER PROGRAM CONDIS

```
$JOB    WATFIV  ONUK,XREF,EXT
C        DEFINITION OF VARIABLES:
        INTEGER N,M,R,I,K,L,L1,L2,I1,J,I3,M1,M2,N3
        integer M3,L3,I6
        REAL AA(2,2),BB(2,1),ID(2,2),PS(10,10)
        REAL FI(10,10),GT(10,10),C1(10,10),C2(10,10)
        real c3(10,10),c8(10,10),d4(10,10),d9(10,10)
        REAL C4(10,10),C5(10,10),C6(10,10),C7(10,10)
        REAL C10(10,10),C11(10,10),D2(10,10),D3(10,10)
        REAL D5(10,10),D6(10,10),D7(10,10),D8(10,10)
        real c14(10,10),c19(10,10),c20(10,10),e4(10,10)
        REAL D10(10,10),D11(10,10),C12(10,10),C13(10,10)
        REAL C15(10,10),C16(10,10),C17(10,10),C18(10,10)
        REAL C110(10,10),W1(1,10)/10*0./,ID1(10,10)
        REAL CC(10),TT(10),DD(10),RR(2,2),PP(2,2)
        REAL D1(10,10),E1(10,10),E2(10,10),E3(10,10)
        REAL E5(10,10),E6(10,10),C9(10,10),ss(2,2)
        REAL FF(2,1),GG(1,1),ALPHA(10),CO(10),ALP,TAR
        REAL TC,TRG,TR1,TR2,TR3,TR4,TR5,TR6,TR7,TR8
        real TR9,TR10,TR11,TK1,c21(10,10)
        PRINT,'THIS PROGRAM FINDS THE Z-DOMAIN PULSE TRANSFER'
        PRINT,'FUNCTION WHEN GIVEN THE S-DOMAIN TRANSFER FUNC.'
        PRINT,'
        PRINT,'THE S-DOMAIN TRANSFER FUNCTION SHOULD BE
            IN THIS FORM'
C
C       H(S)=NUM(S)/DEN(S)
C           NUM(S)=T(M)S**N-1+.........+T(2)S+T(1)
C           DEN(S)=S**N+D(N)S**N-1+....+D(2)S+D(1)
        PRINT,
        PRINT,'ENTER THE NUMERATOR POLYNOMIAL DEGREE'
        READ,M1
        PRINT,' '
        PRINT,'ENTER THE DENOMINATOR POLYNOMIAL DEGREE'
        READ,N
        M2=M1+1
        DO 2 I1=1,M2
            PRINT,'T(',I1,')=?'
            READ,TT(I1)
2       CONTINUE
        N3=N-1
        M3=M1+2
        IF (M1.LT.N3) THEN
```

83

```fortran
              DO 82 I1=M3,N
                   TT(I1)=0.0
82            CONTINUE
          END IF
          DO 12 I1=1,N
                PRINT,'D(',I1,')=?'
                READ,DD(I1)
12        CONTINUE
          DO 22 I1=1,N3
                J=1
                AA(I1,J)=0.0
22        CONTINUE
          DO 32 J=2,N
                DO 102 I1=1,N3
                     I3=I1+1
                     IF (J.EQ.I3) THEN
                          AA(I1,J)=1.0
                     ELSE
                          AA(I1,J)=0.0
                     END IF
102             CONTINUE
32        CONTINUE
          DO 72 J=1,N
                AA(N,J)=-DD(J)
72        CONTINUE
          DO 52 I1=1,N3
                J=1
                BB(I1,J)=0.0
52        CONTINUE
          BB(N,J)=1.0
          DO 62 I1=1,N
                CC(I1)=TT(I1)
62        CONTINUE
          R=1
          M=N
          CALL FAMILY(N,M,'AA')
          CALL RESULT(N,M,I,K,AA)
          CALL FAMILY(N,R,'BB')
          CALL RESULT(N,R,I1,L3,BB)
          CALL FAMILY(R,N,'CC')
          CALL RESULT(R,N,I,K,CC)
          DO 14 J=1,N
                DO 15 I=1,N
                     IF (I.EQ.J) THEN
                          ID(I,J)=1.0
                     ELSE
                          ID(I,J)=0.0
                     END IF
15              CONTINUE
14        CONTINUE
```

84

```
            CALL FAMILY(N,M,'ID')
            CALL RESULT(N,M,I,J,ID)
68          M=1
            DO 285 I=1,N
              DO 286 J=1,N
                RR(I,J)=ID(I,J)
286           CONTINUE
285         CONTINUE
            TR1=1.0
            CALL ALI(N,N,I,K,AA,W1)
            GAMMA=AMAX1(W1(1,1),W1(1,2),W1(1,3),W1(1,4)
     *      W1(1,5),W1(1,6),W1(1,7),W1(1,8),W1(1,9),W1(1,10))
            TC=1/GAMMA
            PRINT,TC
            TH1=TR1/2
            PRINT,TH1
            TH2=TR1/4
            PRINT,TH2
            TH3=TR1/8
            PRINT,TH3
            TH4=TR1/16
            PRINT,TH4
            IF (TR1.LE.TC)    THEN
            TR2=TR1/2
            TR3=TR1/3
            TR4=TR1/4
            TR5=TR1/5
            TR6=TR1/6
            TR7=TR1/7
            TR8=TR1/8
            TR9=TR1/9
            TR10=TR1/10
            TR11=TR1/11
            CALL SCALAR(N,N,I,K,TR1,ID,C1)
            CALL SCALAR(N,N,I,K,TR2,AA,D2)
            CALL CALCUL(N,N,N,I,K,K,C2,C1,D2)
            CALL SCALAR(N,N,I,K,TR3,AA,D3)
            CALL CALCUL(N,N,N,I,K,K,C3,C2,D3)
            CALL SCALAR(N,N,I,K,TR4,AA,D4)
            CALL CALCUL(N,N,N,I,K,K,C4,C3,D4)
            CALL SCALAR(N,N,I,K,TR5,AA,D5)
            CALL CALCUL(N,N,N,I,K,K,C5,C4,D5)
            CALL SCALAR(N,N,I,K,TR6,AA,D6)
            CALL CALCUL(N,N,N,I,K,K,C6,C5,D6)
            CALL SCALAR(N,N,I,K,TR7,AA,D7)
            CALL CALCUL(N,N,N,I,K,K,C7,C6,D7)
            CALL SCALAR(N,N,I,K,TR8,AA,D8)
            CALL CALCUL(N,N,N,I,K,K,C8,C7,D8)
            CALL SCALAR(N,N,I,K,TR9,AA,D9)
            CALL CALCUL(N,N,N,I,K,K,C9,C8,D9)
```

```
          CALL  SCALAR(N,N,I,K,TR10,AA,D10)
          CALL  CALCUL(N,N,N,I,K,K,C10,C9,D10)
          CALL  SCALAR(N,N,I,K,TR11,AA,D11)
          CALL  CALCUL(N,N,N,I,K,K,C11,C10,D11)
          CALL  SUM(N,N,I,K,C1,C2,C12)
          CALL  SUM(N,N,I,K,C12,C3,C13)
          CALL  SUM(N,N,I,K,C13,C4,C14)
          CALL  SUM(N,N,I,K,C14,C5,C15)
          CALL  SUM(N,N,I,K,C15,C6,C16)
          CALL  SUM(N,N,I,K,C16,C7,C17)
          CALL  SUM(N,N,I,K,C17,C8,C18)
          CALL  SUM(N,N,I,K,C18,C9,C19)
          CALL  SUM(N,N,I,K,C19,C10,C110)
          CALL  SUM(N,N,I,K,C110,C11,PS)
          CALL  CALCUL(N,N,N,I,K,K,C21,AA,PS)
          CALL  SUM(N,N,I,K,ID,C21,FI)
          CALL  FAMILY(N,N,PS )
          CALL  RESULT(N,N,I,K,PS)
          CALL  FAMILY(N,N,FI )
          CALL  RESULT(N,N,I,K,FI)
          CALL  CALCUL(N,R,N,I,K,K,GT,PS,BB)
          CALL  FAMILY(N,R,GT )
          CALL  RESULT(N,R,I,L,GT)
          ELSE
          TRG=TR1
          L1=0.0
          TK2=2.0
677       TRG=TR1/(2**L1)
          IF (TC.LE.TRG) THEN
          L1=L1+1
          GO TO 677
          END IF
          PRINT,L1
          TR=TR1/(2**L1)
          CALL  SCALAR(N,N,I,K,TR,ID,C1)
          TR2=(TR**2)/2
          CALL  SCALAR(N,N,I,K,TR2,AA,C2)
          TR3=(TR**3)/6
          CALL  CALCUL(N,N,N,I,K,K,D1,AA,AA)
          CALL  SCALAR(N,N,I,K,TR3,D1,C3)
          TR4=(TR**4)/24
          CALL  CALCUL(N,N,N,I,K,K,D2,AA,D1)
          CALL  SCALAR(N,N,I,K,TR4,D2,C4)
          TR5=(TR**5)/120
          CALL  CALCUL(N,N,N,I,K,K,D3,AA,D2)
          CALL  SCALAR(N,N,I,K,TR5,D3,C5)
          TR6=(TR**6)/720
          CALL  CALCUL(N,N,N,I,K,K,D4,AA,D3)
          CALL  SCALAR(N,N,I,K,TR6,D4,C6)
          TR7=(TR**7)/5040
```

```
      CALL CALCUL(N,N,N,I,K,K,D5,AA,D4)
      CALL SCALAR(N,N,I,K,TR7,D5,C7)
      TR8=(TR**8)/40320
      CALL CALCUL(N,N,N,I,K,K,D6,AA,D5)
      CALL SCALAR(N,N,I,K,TR8,D6,C8)
      TR9=(TR**9)/362880
      CALL CALCUL(N,N,N,I,K,K,D7,AA,D6)
      CALL SCALAR(N,N,I,K,TR9,D7,C9)
      TR10=(TR**10)/3628800
      CALL CALCUL(N,N,N,I,K,K,D8,AA,D7)
      CALL SCALAR(N,N,I,K,TR10,D8,C10)
      TR11=(TR**11)/39916800
      CALL CALCUL(N,N,N,I,K,K,D9,AA,D8)
      CALL SCALAR(N,N,I,K,TR11,D9,C11)
      CALL SUM(N,N,I,K,C1,C2,C12)
      CALL SUM(N,N,I,K,C12,C3,C13)
      CALL SUM(N,N,I,K,C13,C4,C14)
      CALL SUM(N,N,I,K,C14,C5,C15)
      CALL SUM(N,N,I,K,C15,C6,C16)
      CALL SUM(N,N,I,K,C16,C7,C17)
      CALL SUM(N,N,I,K,C17,C8,C18)
      CALL SUM(N,N,I,K,C18,C9,C19)
      CALL SUM(N,N,I,K,C19,C10,C20)
      CALL SUM(N,N,I,K,C20,C11,PS)
      CALL FAMILY(N,N,'P1')
      CALL RESULT(N,N,I,K,PS)
      DO 255 I6=1,L1
          CALL SCALAR(N,N,I,K,TK2,ID,E1)
          CALL FAMILY(N,N,'E1')
          CALL RESULT(N,N,I,K,E1)
          CALL CALCUL(N,N,N,I,K,K,E2,AA,PS)
          CALL SUM(N,N,I,K,E1,E2,E3)
          CALL FAMILY(N,N,'E3')
          CALL RESULT(N,N,I,K,E3)
          CALL CALCUL(N,N,N,I,K,K,E5,E3,PS)
          CALL FAMILY(N,N,'E5')
          CALL RESULT(N,N,I,K,E5)
          CALL COPY(N,N,I,K,PS,E5)
          CALL FAMILY(N,N,'PS')
          CALL RESULT(N,N,I,K,PS)
255   CONTINUE
          CALL FAMILY(N,N,'PS')
          CALL RESULT(N,N,I,K,PS)
          CALL CALCUL(N,R,N,I,K,K,GT,PS,BB)
          CALL FAMILY(N,R,'GT')
          CALL RESULT(N,R,I,K,GT)
          CALL CALCUL(N,N,N,I,K,K,E6,AA,PS)
          CALL SUM(N,N,I,K,ID,E6,FI)
          CALL FAMILY(N,N,'FI')
          CALL RESULT(N,N,I,K,FI)
```

87

```
                   END IF
                   CALL CALCUL(N,M,N,I,K,K,FF,RR,GT)
                   CALL CALCUL(M,M,N,I,K,K,GG,CC,FF)
                   CO(N)=GG(M,M)
                   PRINT,' '
                   PRINT,' '
                   PRINT,'NUMERATOR COEFF.S OF THE PULSE TRANSFER
                        ,FUNCTION'
                   PRINT,' '
                   PRINT,'NUMCOEF',CO(N)
                   DO 147 L=1,N
                   EXECUTE AR
                   ALP=-TAR/L
                   CALL CALCUL(N,N,N,I,J,J,PP,FI,RR)
                   CALL SCALAR(N,N,I,J,ALP,ID,SS)
                   CALL SUM(N,N,I,J,PP,SS,RR)
                   CALL CALCUL(N,M,N,I,J,J,FF,RR,GT)
                   CALL CALCUL(M,M,N,I,J,J,GG,CC,FF)
                   CO(L)=GG(M,M)
                   ALPHA(L)=ALP
147                CONTINUE
                   DO 150 L=1,N3
                      PRINT,'NUMCOEF',CO(L)
150                CONTINUE
                   PRINT,' '
                   PRINT,' '
                   PRINT,'DENOMINATOR COEFF.S OF THE PULSE TRANSFER
                        ,FUNCTION'
                   PRINT,' '
                   DO 151 L=1,N
                      PRINT,'DENUMCO',ALPHA(L)
151                CONTINUE
                   STOP
                   REMOTE BLOCK AR
                   TAR=0.0
                   CALL CALCUL(N,N,N,I,K,K,PP,FI,RR)
                   DO 148 I=1,N
                      DO 149 J=1,N
                         IF(I.EQ.J) THEN
                            TAR=TAR+PP(I,J)
                         END IF
149                   CONTINUE
148                CONTINUE
                   END BLOCK
                   END
C   ***THIS SUBROUTINE READS THE MATRICES FROM THE DATA
        FILE.***
                   SUBROUTINE ENTER(J,D,E,F,G)
                   INTEGER J , D , E , F
                   REAL G(J,D)
```

88

```
            DO 60 E=1,J
               READ 50,(G(E,F),F=1,D)
50             FORMAT(10F8.4)
60          CONTINUE
            RETURN
            END
C    ***THIS SUBROUTINE PRINTS THE ARRAYS AS AN MATRIX
        FORM. ***
            SUBROUTINE COPY(H,O,P,S,G1,K1)
            INTEGER H,O,P,S
            REAL G1(H,O),K1(H,O)
            DO 131 P=1,H
               DO 132 S=1,O
                  G1(P,S)=K1(P,S)
132            CONTINUE
131         CONTINUE
            RETURN
            END
            SUBROUTINE RESULT(H,O,P,S,T)
            INTEGER H , O , P , S
            REAL T ( H , O )
            DO 80  P = 1 , H
               PRINT 70,(T(P,S),S=1,O)
70             FORMAT('0',T2,10X,10(3X,F12.6))
80          CONTINUE
            RETURN
            END
C    ***THIS SUBROUTINE CALCULATES THE MULTIPLICATION OF
        TWO MATRICES. ***
            SUBROUTINE CALCUL(U,V,Y,Z,X,ZX,ZT,W,Q)
            INTEGER U,V,Y,Z,X,ZX
            REAL ZT(U,V),W(U,Y),Q(Y,V)
            DO 93 Z=1,U
               DO 92 X=1,V
                  ZT(Z,X) = 0.0
                  DO 91 ZX=1,Y
                     ZT(Z,X)=ZT(Z,X)+W(Z,ZX)*Q(ZX,X)
91                CONTINUE
92             CONTINUE
93          CONTINUE
            RETURN
            END
C ***THIS SUBROUTINE WRITES THE MATRIX NAME AND ROW,
        COLUMN NUMBERS. ***
            SUBROUTINE FAMILY(ROW,COLUMN,NAME)
            INTEGER ROW,COLUMN
            CHARACTER*2 NAME
            PRINT 94,'MATRIX',NAME
94          FORMAT(T1,'0',T2,10X,T12,A6,T19,1X,T20,A2)
            PRINT 95,'ROW NUMBER. ',ROW
```

```fortran
   95        FORMAT(T1,'0' T2,10X,T12,A11,T23,8X,T31,I2)
            PRINT 96,'COLUMN NUMBER.','COLUMN'
   96        FORMAT(T1,'0',T2,10X,T12,A14,T26,5X,T31,I2)
            RETURN
            END
C    ***THIS SUBROUTINE CALCULATES THE SUMMATION OF THE
C       absolute values OF THE SAME COLUMN ELEMENTS. ***
            SUBROUTINE ALI(I1,I2,H1,H2,G1,W2)
            INTEGER I1,I2,H1,H2
            REAL W2(1,I2),G1(I1,I2)
                DO 41 H2=1,I2
                    DO 42 H1=1,I1
                    W2(1,H2)=W2(1,H2)+ABS(G1(H1,H2))
   42        CONTINUE
   41        CONTINUE
            RETURN
            END
C    ***THIS SUBROUTINE MULTIPLIES THE MATRIX BY SCALAR
C       NUMBER. ***
            SUBROUTINE SCALAR(K1,K2,G11,G2,P1,G3,G4)
            INTEGER K1,K2,G11,G2
            REAL G3(K1,K2),G4(K1,K2),P1
                DO 43 G2=1,K2
                    DO 44 G11=1,K1
                    G4(G11,G2)=G3(G11,G2)*P1
   44        CONTINUE
   43        CONTINUE
            RETURN
            END
C    ***THIS SUBROUTINE CALCULATES THE SUM OF THE TWO
C       MATRICES. ***
            SUBROUTINE SUM(K3,K4,I5,K5,X1,X2,X3)
            INTEGER K3,K4,I5,K5
            REAL X1(K3,K4),X2(K3,K4),X3(K3,K4)
                DO 45 K5=1,K4
                    DO 46 I5=1,K3
                    X3(I5,K5)=X1(I5,K5)+X2(I5,K5)
   46        CONTINUE
   45        CONTINUE
            RETURN
            END
   $ENTRY
```

APPENDIX C

COMPUTER PROGRAM RCIOR

```
C     ******************************************
C     *    THESIS PROGRAM                      *
C     *    INDIRECT ADAPTIVE CONTROL           *
C     *    PARAMETER ESTIMATION                *
C     *    USING REC. LEAST SQUARE ALGORITHM   *
C     *                                        *
C     ******************************************
C
C     ******************************************
C     *    DEFINITION OF VARIABLES:            *
C     ******************************************
      INTEGER N1,N,L,K,L1,I,M,L2,J,N3,N2,J1,J2,J3,M1
      INTEGER N4,N5,N6,COLUM,J5,M5,J7,J8,J9,L5,M6,L7
      INTEGER DEG1,DEG2,DEG3,K9,M7,L8,M2,M3,L4,M9,M8
      REAL V1(4,1),V2(1,1),V3(4,1),V4(1,1),V5(4,1)
      REAL U2(4,1),Y(200),U(200),F1(4,1),FT(1,4),P2(4,4)
      real v6(1,1),p9(4,4),vp(200),se(800,4)
      REAL P4(1,1),P5(1,4),P6(4,4),P7(4,4),P8(4,4)
      REAL TSM,TSP,TSF,TSN,PI,V(200),YM(200),MU(50)
      REAL A(20,20),H(20,20),B(20),C(20,20),X(20)
      REAL D(10),T(20),F(20),G(20),S1(10),S2(10),C3(10)
      REAL U3(4,1),C5(10),C6(10),MK(50),U4(4,1),C7(100)
      REAL SUM2,TEMP,SIGMA,ASIGMA,DY,UP(200),Q2(50)
      REAL Q1(50),Q3(50),C8(100),R(20),KD(100),VC(200)
      REAL B1(20),H1(100),H2(100),H3(100),H4(100)
      REAL U1(4,1),P3(4,1),AB(4,4),C4(10),h5(100)
      PI=3.141592654
      DO 7777 I=1,2
         H1(I)=0.0
         H2(I)=0.0
         H3(I)=0.0
         H4(I)=0.0
         H5(I)=0.0
7777  CONTINUE
      DO 20 I =1,200
         DO 8  J =1,4
         SE(I,J)=0.0
   8     CONTINUE
  20  CONTINUE
      M=1
C     ******************************************
C     * THIS PART OF THE PROGRAM ASKS THE SYSTEM *
C     * ORDER , PLANT AND MODEL NUMERATOR,DENOMI.*
```

```fortran
C   *  POLYNOMIAL COEFFICIENTS.                           *
C   ***********************************************
        WRITE(6,701)
701     FORMAT('1','ENTER THE ORDER OF THE SYSTEM')
        READ(5,*) N
        N1=N+1
        N2=2*N
        N3=N+2
        N6=2*N+1
C       M7=10*N*2
        L8=10*N2
        CALL FRTCMS('CLRSCRN ')
        WRITE(6,2002)
2002    FORMAT(' ','ENTER PLANT NUMERATOR POLYNOMIAL
     +          COEFFICIENTS')
        WRITE(6,2003)
2003    FORMAT(' ','IN ASCENDING ORDER OF Z')
        DO 2001 I=1,N
        J7=I-1
        WRITE(6,2004) J7
2004    FORMAT(' ','COEFF. OF Z**(',I2,')=')
        READ(5,*) C5(I)
2001    CONTINUE
        CALL FRTCMS('CLRSCRN ')
        WRITE(6,2005)
2005    FORMAT(' ','ENTER PLANT DENOMINATOR POLYNOMIAL
     +          COEFFICIENTS')
        WRITE(6,2006)
2006    FORMAT(' ','IN ASCENDING ORDER OF Z')
        WRITE(6,2007)
2007    FORMAT(' ','HIGHEST COEFF. SHOULD BE 1. ')
        DO 2008 I=1,N
        J8=I-1
        WRITE(6,2009) J8
2009    FORMAT(' ','COEFF. OF Z**(',I2,')=')
        READ(5,*) C6(I)
2008    CONTINUE
        DO 112 L=1,200
        VP(L)=SIN(L*PI/3)+SIN(L*PI/4)+SIN(L*PI/5)
     +          +SIN(L*PI/7)+SIN(L*PI/2)+SIN(L*PI/6)
112     CONTINUE
        DO 243 L=1,200
        VC(L)=100.0
243     CONTINUE
        DO 124 L=1,N
        Y(L)=0.6
        U(L)=VP(L)
124     CONTINUE
        Y(N1)=0.0
        DO 2010 I=1,N
```

```
              Y(N1)=Y(N1)-C6(I)*Y(I)+C5(I)*U(I)
2010      CONTINUE
          DO 2011 I=1,N
             J9=N1-I
             L5=N6-I
             U3(J9,M)=C6(I)
             U3(L5,M)=C5(I)
2011      CONTINUE
          DO 113 I=1,N
             L1=N+I
             L2=N1-I
             F1(I,M)=0.0
             F1(L1,M)=VP(L2)
113       CONTINUE
          DO 121 I=1,N2
             DO 122 K=1,N2
                IF(I.EQ.K) THEN
                   P2(I,K)=30.0
                ELSE
                P2(I,K)=0.0
                END IF
122          CONTINUE
121       CONTINUE
C         CALL FAMILY(N2,N2,'P2')
C         CALL RESULT(N2,N2,I,K,P2)
          CALL COPYM(N2,N2,I,L,AB,P2)
          DO 123 I=1,N2
             U1(I,M)=0.0
123       CONTINUE
          CALL TRANS(N2,M,I,K,F1,FT)
          CALL FRTCMS('CLRSCRN ')
          WRITE(6,702)
702       FORMAT('  ',*ENTER Q(Z) IN DESCENDING ORDER OF Z')
          WRITE(6,703)
703       FORMAT('  ',*HIGHEST COEFF. MUST BE 1.')
          WRITE(6,704)
704       FORMAT('  ',*REMARK: Q(Z) SHOULD BE STABLE POLYNOMIAL')
          DO 157 I=1,N
             WRITE(6,705)N-I
705          FORMAT('  ',*COEFF. OF Z**(',I2,')=')
             READ(5,*) C3(I)
157       CONTINUE
          CALL FRTCMS('CLRSCRN ')
          WRITE(6,706)
706       FORMAT('  ',*ENTER PSTAR(Z) IN ASCENDING ORDER
         OF Z')
          WRITE(6,707)
707       FORMAT('  ',*HIGHEST COEFF. MUST BE 1.')
          WRITE(6,708)
708       FORMAT('  ',*REMARK-1:PSTAR(Z) IS THE DENOMINATOR
```

93

```
                POLYNOMIAL')
           WRITE(6,709)
709        FORMAT(' ','OF MODEL')
           WRITE(6,710)
710        FORMAT(' ','*REMARK-2:PSTAR(Z) SHOULD BE STABLE
                POLYNOMIAL')
           DO 158 I=1,N
              WRITE(6,711)N-I
711           FORMAT(' ','COEFF. OF Z**(',I2,')=')
              READ(5,*) C4(I)
158        CONTINUE
           DO 241 I=1,20
              V(I)=VP(I)
241        CONTINUE
       DO 114 J=N1,L8
           CALL CALCUL(N2,M,N2,I,L,K,V1,P2,F1)
           CALL CALCUL(M,M,N2,I,L,K,V2,FT,V1)
           TSP=1.+V2(M,M)
           CALL CALCUL(M,M,N2,I,L,K,V4,FT,U1)
           TSF=Y(J)-V4(M,M)
           TSN=TSF/TSP
           CALL SCALAR(N2,M,I,K,TSN,V1,V5)
           CALL SUM(N2,M,I,K,U1,V5,U2)
           CALL CALCUL(N2,M,N2,I,L,K,P3,P2,F1)
           CALL CALCUL(M,M,N2,I,L,K,P4,FT,P3)
           TSM=1./(1+P4(M,M))
           CALL CALCUL(M,N2,N2,I,L,K,P5,FT,P2)
           CALL CALCUL(N2,N2,M,I,L,K,P6,F1,P5)
           CALL CALCUL(N2,N2,N2,I,L,K,P7,P2,P6)
           CALL SCALAR(N2,N2,I,L,TSM,P7,P8)
           CALL SUB(N2,N2,I,L,P2,P8,P9)
C          INITIALIZE
           DO 115 I=1,N2
              DO 116 K=1,N2
                 P2(I,K)=0.0
116           CONTINUE
115        CONTINUE
           CALL COPYM(N2,N2,I,L,P2,P9)
           IF(J.EQ.10) THEN
           CALL COPYM(N2,N2,I,L,P2,AB)
           ELSE IF(J.EQ.20) THEN
           CALL COPYM(N2,N2,I,L,P2,AB)
           ELSE IF(J.EQ.30) THEN
           CALL COPYM(N2,N2,I,L,P2,AB)
           ELSE IF(J.EQ.40) THEN
           CALL COPYM(N2,N2,I,L,P2,AB)
           ELSE IF(J.EQ.50) THEN
           CALL COPYM(N2,N2,I,L,P2,AB)
           ELSE IF(J.EQ.60) THEN
           CALL COPYM(N2,N2,I,L,P2,AB)
```

94

```fortran
              ELSE IF(J.EQ.70) THEN
              CALL COPYM(N2,N2,I,L,P2,AB)
              END IF
              IF(J.LE.M7) GO TO 9591
              C5(1)=3.
          DO 2031 I=1,N
              J9=N1-I
              L5=N6-I
              U3(J9,M)=C6(I)
              U3(L5,M)=C5(I)
2031      CONTINUE
9591          DO 117 I=1,N2
              U1(I,M)=0.0
117           CONTINUE
              CALL COPYM(N2,M,I,L,U1,U2)
C             CALL FAMILY(N2,N2,P2)
C             CALL RESULT(N2,N2,I,K,P2)
              DO 148 I=1,N
              U(I)=V(I)
148           CONTINUE
              DO 211 I=1,N
              D(I)=U1(I,M)
211           CONTINUE
              DO 212 I=1,N
              L4=N+I
              B(I)=U1(L4,M)
212           CONTINUE
              DO 7011 I=1,N
              M9=N-I+1
              Q1(I)=C3(M9)
7011          CONTINUE
              Q1(N1)=1.0
              Q2(N1)=0.0
              DO 4001 I=1,N
              Q3(I)=D(I)-C4(I)
4001          CONTINUE
              DO 7007 I=1,N
              M8=N-I+1
              Q2(I)=Q3(M8)
7007          CONTINUE
              DEG1=N+1
              DEG2=2*N
              DEG3=DEG2+2
              DO 6001 I=1,DEG3
              R(I)=0.0
              DO 6002 K=1,DEG2
                  IF(((I-K).LT.0.0).OR.((I-K).GT.DEG1))
             *        GO TO 6002
                  IF((I.GT.1).OR.(K.GT.1)) GO TO 6503
6503              R(I-1)=R(I-1)+Q1(K-1)*Q2(I-(K-1))
```

MICROCOPY RESOLUTION TEST CHART

NATIONAL BUREAU OF STANDARDS-1963-A

```
6002         CONTINUE
6001       CONTINUE
           R(1)=Q1(1)*Q2(1)
           DO 9003 I=1,N6
             K9=N6-I+1
             F(I)=R(K9)
9003       CONTINUE
           N4=2*N+1
           M1=N+1
           DO 41 J4=1,M1
             DO 51 I=1,N4
               K=I-J4
               A(I,J4)=0.
               IF (K.EQ.0.) THEN
                 A(I,J4)=1.
               END IF
               IF ((K.GT.0.).AND.(K.LT.M1)) THEN
                 A(I,J4)=D(K)
               END IF
51           CONTINUE
41         CONTINUE
           DO 61 J4=1,N
             DO 71 I=1,N4
               A(I,N+1+J4)=0.
               K=I-J4-1
               IF ((K.GT.0.).AND.(K.LT.M1)) THEN
                 A(I,N+1+J4)=B(K)
               END IF
71           CONTINUE
61         CONTINUE
           DO 10 COLUM=1,N4
           SUM2=0.
           DO 70 J4=COLUM,N4
             SUM2=SUM2+(A(J4,COLUM))**2
70         CONTINUE
           SIGMA=SQRT(SUM2)
           ASIGMA=ABS(SIGMA)
           IF (ASIGMA.LT.0.1) GO TO 6666
C            WRITE(6,714)
C14          FORMAT(' ','MATRIX A IS SINGULAR')
C          END IF
           DO 80 J4=COLUM,N4
             G(J4)=0.
80         CONTINUE
           G(COLUM)=SIGMA
           SUM2=0.
           DO 90 J4=COLUM,N4
             SUM2=SUM2+(A(J4,COLUM)-G(J4))**2
90         CONTINUE
           DO 100 J4=COLUM,N4
```

```fortran
      DO 110 K=COLUM,N4
         IF (ABS(SUM2).LT.0.00001) THEN
            TEMP=0.
         ELSE
            TEMP=-2*(A(J4,COLUM)-G(J4))*(A(K,COLUM)
     +            -G(K))/SUM2
         END IF
         IF (J4.EQ.K) THEN
            TEMP=1.+TEMP
         END IF
         H(J4,K)=TEMP
110   CONTINUE
100   CONTINUE
      DO 131 J4=COLUM,N4
         DO 130 K=COLUM,N4
            TEMP=0.
            DO 140 L=COLUM,N4
               TEMP=TEMP+H(J4,L)*A(L,K)
140         CONTINUE
            C(J4,K)=TEMP
130      CONTINUE
131   CONTINUE
      DO 150 J4=COLUM,N4
         TEMP=0.
         DO 160 L=COLUM,N4
            TEMP=TEMP+H(J4,L)*F(L)
160      CONTINUE
         T(J4)=TEMP
150   CONTINUE
      DO 170 J4=COLUM,N4
         DO 180 K=COLUM,N4
            A(J4,K)=C(J4,K)
180      CONTINUE
         F(J4)=T(J4)
170   CONTINUE
10    CONTINUE
      X(N4)=F(N4)/A(N4,N4)
      I=N4-1
812   SUM2=0.
      M2=I+1
      DO 30 J4=M2,N4
         SUM2=SUM2+A(I,J4)*X(J4)
30    CONTINUE
      X(I)=(F(I)-SUM2)/A(I,I)
      IF (ABS(X(I)).LT.0.00001) THEN
         X(I)=0.
      END IF
      I=I-1
      IF(I.GE.1) GO TO 812
6666  H1(J)=X(1)
```

97

```
                H2(J)=X(2)
                H3(J)=X(3)
                H4(J)=X(4)
                H5(J)=X(5)
                DO 141 I=1,N1
                   S2(I)=X(I)
141             CONTINUE
                DO 142 I=N3,N4
                   N5=I-N1
                   S1(N5)=X(I)
142             CONTINUE
                UP(J)=0.0
                DO 5001 I=1,N
                   L7=I+1
                   UP(J)=UP(J)+(S2(L7)-C3(I))*U(J-I)+S1(I)*Y(J-I)
     +                 +C3(I)*V(J-I)
5001            CONTINUE
                U(J)=(UP(J)+V(J))/(1-S2(1))
                J5=J+1
                Y(J5)=0.0
                DO 3003 I=1,N
                   M6=N1-I
                   Y(J5)=Y(J5)-C6(I)*Y(J5-M6)+C5(I)*U(J5-M6)
3003            CONTINUE
                DO 189 I=1,N1
                   YM(I)=0.0
189             CONTINUE
                YM(J5)=0.0
                DO 2508 I=1,N
                   M8=N-I+1
                   B1(I)=C5(M8)
2508            CONTINUE
                DO 3004 I=1,N
                   YM(J5)=YM(J5)-C4(I)*YM(J5-I)+B1(I)*V(J5-I)
3004            CONTINUE
                MK(J5)=-Y(J5)
                DO 3005 I=1,N
                   MK(J5)=MK(J5)+B(I)*V(J5-I)-C4(I)*Y(J5-I)
3005            CONTINUE
                MU(J5)=ABS(MK(J5))
                IF(MU(J5).LT.20.0) THEN
                   V(J5)=VC(J5)
                ELSE
                   V(J5)=VC(J5)+VP(J5)
                END IF
                DO 120 I=1,N2
                   F1(I,M)=0.0
120             CONTINUE
                DO 118 I=1,N
                   L1=N+I
```

98

```fortran
                J2=J+1-I
                F1(I,M)=-Y(J2)
                F1(L1,M)=U(J2)
118     CONTINUE
        DO 119 I=1,N2
                FT(M,I)=0.0
119     CONTINUE
        CALL TRANS(N2,M,I,K,F1,FT)
        CALL FAMILY(N2,M,'U1')
        CALL RESULT(N2,M,I,K,U1)
        DO 3001 I=1,N2
                U4(I,M)=0.0
3001    CONTINUE
        CALL SUB(N2,N2,I,L,U3,U1,U4)
        C7(J)=0.0
        DO 3002 I=1,N2
                C7(J)=C7(J)+U4(I,M)*U4(I,M)
3002    CONTINUE
        C8(J)=SQRT(C7(J))
114     CONTINUE
        DO 8888 I=1,N1
                C8(I)=0.
8888    CONTINUE
C       DO 8111 I=1,100
C       WRITE (8,8169) C8(I)
C111    CONTINUE
C169    FORMAT(10X,F12.6)
        WRITE(8,1111)'SYS. OUTPUT','MOD. OUTPUT'
1111    FORMAT(13X,A11,6X,A11)
        DO 976 I=1,100
C       WRITE (6,8002) Y(I),YM(I)
        WRITE(8,8002) Y(I),YM(I)
8002    FORMAT(9X,F15.6,6X,F15.6)
976     CONTINUE
        DO 4441 I=1,L8
C               WRITE(8,4445)I
C               WRITE(8,4442) H1(I)
C               WRITE(8,4442) H2(I)
C               WRITE(8,4442) H3(I)
C               WRITE(8,4442) H4(I)
C               WRITE(8,4442) H5(I)
4445    FORMAT( ,I2)
4442    FORMAT(10X,F15.6)
4441    CONTINUE
        DO 1025 I=1,L8
                SE(I,1)=Y(I)
                SE(I,2)=YM(I)
                KD(I)=I
1025    CONTINUE
C       ***************************************
```

```fortran
C      * THIS PART PLOTS THE NECESSARY  DATA    *
CC     * THAT PROGRAM CALCULATES               *
C      ****************************************
         CALL VPLOT(KD,SE,L8,2,'TIME    ','        ')
         CALL V1PLOT(KD,C8,L8,1,'TIME    ','        ')
         CALL V2PLOT(KD,MU,L8,1,'TIME    ','        ')
         CALL V3PLOT(KD,V,L8,1,'TIME    ','        ')
         CALL V4PLOT(KD,U,L8,1,'TIME    ','        ')
C        CALL V4PLOT(KD,H1,L8,1,'        ','        ')
C        CALL V4PLOT(KD,H2,L8,1,'        ','        ')
C        CALL V4PLOT(KD,H3,L8,1,'        ','        ')
C        CALL V4PLOT(KD,H4,L8,1,'        ','        ')
C        CALL V4PLOT(KD,H5,L8,1,'        ','        ')
      STOP
      END
C      ****************************************
C      * THIS SUBROUTINE PRINTS THE ARRAYS AS AN*
CC     * MATRIX FORM                           *
C      ****************************************
      SUBROUTINE RESULT(H,O,P,S,T)
      INTEGER H , O , P , S
      REAL T ( H , O )
      DO 80  P = 1 , H
        WRITE(8,70)(T(P,S),S=1,O)
C       PRINT 70,(T(P,S),S=1,O)
70      FORMAT('0',T2,9X,10(3X,F12.6))
80    CONTINUE
      RETURN
      END
C      ****************************************
CC     * THIS SUB.  CALCULATES THE MULTIPLICATION*
CC     * TWO MATRICES.                         *
C      ****************************************
      SUBROUTINE CALCUL(U,V,Y,Z,X,ZX,ZT,W,Q)
      INTEGER U,V,Y,Z,X,ZX
      REAL ZT(U,V),W(U,Y),Q(Y,V)
      DO 93 Z=1,U
        DO 92 X=1,V
          ZT(Z,X) = 0.0
          DO 91 ZX=1,Y
            ZT(Z,X)=ZT(Z,X)+W(Z,ZX)*Q(ZX,X)
91        CONTINUE
92      CONTINUE
93    CONTINUE
      RETURN
      END
C      ****************************************
CC     * THIS SUBROUTINE WRITES THE MATRIX NAME *
CC     * AND ROW,COLUMN NUMBERS.               *
C      ****************************************
```

```
            SUBROUTINE FAMILY(ROW,COLUMN,NAME)
            INTEGER ROW,COLUMN
            CHARACTER*2 NAME
            WRITE(8,94) 'MATRIX' ,NAME
C           PRINT 94, 'MATRIX' ,NAME
94          FORMAT(T1, '0' ,T2,10X,T12,A6,T19,1X,T20,A2)
            WRITE(8,95) 'ROW NUMBER. ' ,ROW
C           PRINT 95, 'ROW NUMBER. ' ,ROW
95          FORMAT(T1, '0' ,T2,10X,T12,A11,T23,8X,T31,I2)
            WRITE(8,96) 'COLUMN NUMBER. ' ,COLUMN
C           PRINT 96, 'COLUMN NUMBER. ' ,COLUMN
96          FORMAT(T1, '0' ,T2,10X,T12,A14,T26,5X,T31,I2)
            RETURN
            END
C     ************************************************
C     * THIS SUBROUTINE CALCULATES THE SUMMATION *
C     * OF THE SAME COLUMN ELEMENTS.             *
C     ************************************************
            SUBROUTINE ALI(I1,I2,H1,H2,G1,W2)
            INTEGER I1,I2,H1,H2
            REAL W2(1,I2),G1(I1,I2)
                DO 41 H2=1,I2
                    DO 42 H1=1,I1
                    W2(1,H2)=W2(1,H2)+ABS(G1(H1,H2))
42          CONTINUE
41          CONTINUE
            RETURN
            END
C     ************************************************
C     * THIS SUBROUTINE MULTIPLIES THE MATRIX  *
C     * BY SCALAR NUMBER.                       *
C     ************************************************
            SUBROUTINE SCALAR(K1,K2,G11,G2,P1,G3,G4)
            INTEGER K1,K2,G11,G2
            REAL G3(K1,K2),G4(K1,K2),P1
                DO 43 G2=1,K2
                    DO 44 G11=1,K1
                    G4(G11,G2)=G3(G11,G2)*P1
44          CONTINUE
43          CONTINUE
            RETURN
            END
C     ************************************************
C     * THIS SUBROUTINE CALCULATES THE SUM OF  *
C     * THE TWO MATRICES.                       *
C     ************************************************
            SUBROUTINE SUM(K3,K4,I5,K5,X1,X2,X3)
            INTEGER K3,K4,I5,K5
            REAL X1(K3,K4),X2(K3,K4),X3(K3,K4)
                DO 45 K5=1,K4
```

```
                          DO 46 I5=1,K3
                          X3(I5,K5)=X1(I5,K5)+X2(I5,K5)
46      CONTINUE
45      CONTINUE
        RETURN
        END
C       ****************************************
C       * THIS SUBROUTINE COPPIES THE MATRICES. *
C       ****************************************
        SUBROUTINE COPYM(K3,K4,I5,K5,X1,X2)
        INTEGER K3,K4,I5,K5
        REAL X1(K3,K4),X2(K3,K4)
                  DO 45 K5=1,K4
                    DO 46 I5=1,K3
                    X1(I5,K5)=X2(I5,K5)
46      CONTINUE
45      CONTINUE
        RETURN
        END
C       ****************************************
C       * THIS SUBROUTINE FINDS  THE TRANSPOSE  *
C       * OF THE MATRIX.                        *
C       ****************************************
        SUBROUTINE TRANS(K3,K4,I5,K5,X1,X2)
        INTEGER K3,K4,I5,K5
        REAL X1(K3,K4),X2(K4,K3)
                  DO 45 K5=1,K4
                    DO 46 I5=1,K3
                    X2(K5,I5)=X1(I5,K5)
46      CONTINUE
45      CONTINUE
        RETURN
        END
C       ********************************************
C       * THIS SUBROUTINE CALCULATES THE SUBTRACTION.*
C       * OF THE MATRICES.                          *
C       ********************************************
        SUBROUTINE SUB(K3,K4,I5,K5,X1,X2,X3)
        INTEGER K3,K4,I5,K5
        REAL X1(K3,K4),X2(K3,K4),X3(K3,K4)
                  DO 45 K5=1,K4
                    DO 46 I5=1,K3
                    X3(I5,K5)=X1(I5,K5)-X2(I5,K5)
46      CONTINUE
45      CONTINUE
        RETURN
        END
C       ****************************************
C       * THIS  SUB. PLOTS  THE  ARRAYS  USING  *
C       * THE DISSPLA PROGRAM.                   *
```

```fortran
C     ********************************************
C
      SUBROUTINE VPLOT(T,U,M,N,LABELX,LABELY)
C**************
      REAL U(800,4),T(800),Y(800),YX(4),YN(4)
      INTEGER PMAX,PMIN,M,N,LABELX,LABELY
C
      CALL AMAX(T,M,TMAX,PMAX)
      CALL AMIN(T,M,TMIN,PMIN)
      DO 20 J =1,N
         DO 10 I =1,M
            Y(I) =U(I,J)
   10    CONTINUE
         CALL AMAX(Y,M,YMAX,PMAX)
         YX(J) = YMAX
         CALL AMIN(Y,M,YMIN,PMIN)
         YN(J) =YMIN
         WRITE(6,11) YMAX,YMIN
   20 CONTINUE
      WRITE(6,13)(YX(I),I=1,4)
      WRITE(6,13)(YN(I),I=1,4)
      CALL AMAX(YX,N,YMAX,PMAX)
      CALL AMIN(YN,N,YMIN,PMIN)
      WRITE(6,11) YMAX,YMIN
      CALL TEK 618
      CALL BLOWUP(1.2)
      CALL PAGE(11.,8.5)
C     CALL NOBRDR
      CALL AREA2D(9.,6.)
      CALL XNAME(LABELX,6)
      CALL YNAME(LABELY,6)
      CALL HEADIN ('PLANT AND MODEL OUTPUTS $',100,1.,1)
      CALL CROSS
      CALL GRAF(TMIN,'SCALE',TMAX,YMIN,'SCALE',YMAX)
      CALL SPLINE
      DO 40 J =1,N
         DO 30 I =1,M
            Y(I) =U(I,J)
   30    CONTINUE
         IF(J.EQ.2) CALL CHNDOT
         CALL CURVE (T,Y,M,0)
   40 CONTINUE
      CALL ENDPL(0)
C     CALL DONEPL
   11 FORMAT(' ',10X,2G12.5/)
   13 FORMAT(' ',10X,4G12.5/)
      RETURN
      END
C
      SUBROUTINE V1PLOT(T,U,M,N,LABELX,LABELY)
```

```fortran
C**************
      REAL U(800,4),T(800),Y(800),YX(4),YN(4)
      INTEGER PMAX,PMIN,M,N,LABELX,LABELY
C
      CALL AMAX(T,M,TMAX,PMAX)
      CALL AMIN(T,M,TMIN,PMIN)
      DO 20 J =1,N
         DO 10 I =1,M
            Y(I) =U(I,J)
  10     CONTINUE
         CALL AMAX(Y,M,YMAX,PMAX)
         YX(J) = YMAX
         CALL AMIN(Y,M,YMIN,PMIN)
         YN(J) =YMIN
         WRITE(6,11) YMAX,YMIN
  20  CONTINUE
      WRITE(6,13)(YX(I),I=1,4)
      WRITE(6,13)(YN(I),I=1,4)
      CALL AMAX(YX,N,YMAX,PMAX)
      CALL AMIN(YN,N,YMIN,PMIN)
      WRITE(6,11) YMAX,YMIN
      CALL TEK 618
      CALL BLOWUP(1.2)
      CALL PAGE(11.,8.5)
C     CALL NOBRDR
      CALL AREA2D(9.,6.)
      CALL XNAME(LABELX,6)
      CALL YNAME(LABELY,6)
      CALL HEADIN ('PARAMETER ERROR $',100,1.,1)
      CALL CROSS
      CALL GRAF(TMIN,'SCALE',TMAX,YMIN,'SCALE',YMAX)
      CALL LINEAR
      DO 40 J =1,N
         DO 30 I =1,M
            Y(I) =U(I,J)
  30     CONTINUE
         IF(J.EQ.2) CALL CHNDOT
         CALL CURVE (T,Y,M,0)
  40  CONTINUE
      CALL ENDPL(0)
C     CALL DONEPL
  11  FORMAT(' ',10X,2G12.5/)
  13  FORMAT(' ',10X,4G12.5/)
      RETURN
      END
C
      SUBROUTINE V2PLOT(T,U,M,N,LABELX,LABELY)
C**************
      REAL U(800,4),T(800),Y(800),YX(4),YN(4)
      INTEGER PMAX,PMIN,M,N,LABELX,LABELY
```

```
C
      CALL AMAX(T,M,TMAX,PMAX)
      CALL AMIN(T,M,TMIN,PMIN)
      DO 20 J =1,N
          DO 10 I =1,M
              Y(I) =U(I,J)
  10      CONTINUE
          CALL AMAX(Y,M,YMAX,PMAX)
          YX(J) = YMAX
          CALL AMIN(Y,M,YMIN,PMIN)
          YN(J) =YMIN
          WRITE(6,11) YMAX,YMIN
  20  CONTINUE
      WRITE(6,13)(YX(I),I=1,4)
      WRITE(6,13)(YN(I),I=1,4)
      CALL AMAX(YX,N,YMAX,PMAX)
      CALL AMIN(YN,N,YMIN,PMIN)
      WRITE(6,11) YMAX,YMIN
      CALL TEK 618
      CALL BLOWUP(1.2)
      CALL PAGE(11.,8.5)
C     CALL NOBRDR
      CALL AREA2D(9.,6.)
      CALL XNAME(LABELX,6)
      CALL YNAME(LABELY,6)
      CALL HEADIN ('OUTPUT PREDICTION ERROR $',100,1.,1)
      CALL CROSS
      CALL GRAF(TMIN,'SCALE',TMAX,YMIN,'SCALE',YMAX)
      CALL SPLINE
      DO 40 J =1,N
          DO 30 I =1,M
              Y(I) =U(I,J)
  30      CONTINUE
          IF(J.EQ.2) CALL CHNDOT
          CALL CURVE (T,Y,M,0)
  40  CONTINUE
      CALL ENDPL(0)
C     CALL DONEPL
  11  FORMAT(' ',10X,2G12.5/)
  13  FORMAT(' ',10X,4G12.5/)
      RETURN
      END
C
      SUBROUTINE V3PLOT(T,U,M,N,LABELX,LABELY)
C*************
      REAL U(800,4),T(800),Y(800),YX(4),YN(4)
      INTEGER PMAX,PMIN,M,N,LABELX,LABELY
C
      CALL AMAX(T,M,TMAX,PMAX)
      CALL AMIN(T,M,TMIN,PMIN)
```

105

```fortran
      DO 20 J =1,N
         DO 10 I =1,M
            Y(I) =U(I,J)
10       CONTINUE
         CALL AMAX(Y,M,YMAX,PMAX)
         YX(J) = YMAX
         CALL AMIN(Y,M,YMIN,PMIN)
         YN(J) =YMIN
         WRITE(6,11) YMAX,YMIN
20    CONTINUE
      WRITE(6,13)(YX(I),I=1,4)
      WRITE(6,13)(YN(I),I=1,4)
      CALL AMAX(YX,N,YMAX,PMAX)
      CALL AMIN(YN,N,YMIN,PMIN)
      WRITE(6,11) YMAX,YMIN
      CALL TEK 618
      CALL BLOWUP(1.2)
      CALL PAGE(11.,8.5)
C     CALL NOBRDR
      CALL AREA2D(9.,6.)
      CALL XNAME(LABELX,6)
      CALL YNAME(LABELY,6)
      CALL HEADIN ('EXTERNAL INPUT $',100,1.,1)
      CALL CROSS
      CALL GRAF(TMIN,'SCALE',TMAX,YMIN,'SCALE',YMAX)
      CALL SPLINE
      DO 40 J =1,N
         DO 30 I =1,M
            Y(I) =U(I,J)
30       CONTINUE
         IF(J.EQ.2) CALL CHNDOT
         CALL CURVE (T,Y,M,0)
40    CONTINUE
      CALL ENDPL(0)
C     CALL DONEPL
11    FORMAT(' ',10X,2G12.5/)
13    FORMAT(' ',10X,4G12.5/)
      RETURN
      END
      SUBROUTINE V4PLOT(T,U,M,N,LABELX,LABELY)
C*************
      REAL U(800,4),T(800),Y(800),YX(4),YN(4)
      INTEGER PMAX,PMIN,M,N,LABELX,LABELY
C
      CALL AMAX(T,M,TMAX,PMAX)
      CALL AMIN(T,M,TMIN,PMIN)
      DO 20 J =1,N
         DO 10 I =1,M
            Y(I) =U(I,J)
10       CONTINUE
```

106

```
                CALL AMAX(Y,M,YMAX,PMAX)
                YX(J) = YMAX
                CALL AMIN(Y,M,YMIN,PMIN)
                YN(J) =YMIN
                WRITE(6,11) YMAX,YMIN
    20          CONTINUE
                WRITE(6,13)(YX(I),I=1,4)
                WRITE(6,13)(YN(I),I=1,4)
                CALL AMAX(YX,N,YMAX,PMAX)
                CALL AMIN(YN,N,YMIN,PMIN)
                WRITE(6,11) YMAX,YMIN
                CALL TEK 618
                CALL BLOWUP(1.2)
                CALL PAGE(11.,8.5)
    C           CALL NOBRDR
                CALL AREA2D(9.,6.)
                CALL XNAME(LABELX,6)
                CALL YNAME(LABELY,6)
                CALL HEADIN ('INPUT TO THE PLANT $',100,1.,1)
                CALL CROSS
                CALL GRAF(TMIN,'SCALE',TMAX,YMIN,'SCALE',YMAX)
                CALL SPLINE
                DO 40 J =1,N
                   DO 30 I =1 M
                      Y(I) =U(I,J)
    30             CONTINUE
                   IF(J.EQ.2) CALL CHNDOT
                   CALL CURVE (T,Y,M,0)
    40          CONTINUE
                CALL ENDPL(0)
    C           CALL DONEPL
    11          FORMAT(' ',10X,2G12.5/)
    13          FORMAT(' ',10X,4G12.5/)
                RETURN
                END
    C
                SUBROUTINE AMAX(Y,N,YMAX,PMAX)
    C
    C           **************************************************
    C           *  SUBROUTINE TO COMPUTE THE LARGE ELELEMENT
    C           *  IN A GIVEN ROW OR COLUMN IN ARRAY 'A'.
    C           **************************************************
    C
    C           *** VARIABLE DECLARATION ***
    C           REAL AMAX
                INTEGER PMAX
                DIMENSION Y(N)
    C
                YMAX=Y(1)
                DO 5100 I=2,N
```

107

```fortran
              IF(Y(I).LE.YMAX) GO TO 5000
                 YMAX=Y(I)
                 PMAX=I
5000             CONTINUE
5100       CONTINUE
C          MAXROW=POS
        RETURN
        END
C
C
        SUBROUTINE AMIN(Y,N,YMIN,PMIN)
C
C          *******************************************
C          *   SUBROUTINE TO COMPUTE THE SMALL ELEMENT
C          *   IN A GIVEN ROW OR COLUMN IN ARRAY 'A'.
C          *******************************************
C
C          *** VARIABLE DECLARATION ***
C          REAL AMIN
           INTEGER PMIN
           DIMENSION Y(N)
C
           YMIN=Y(1)
           DO 6100 I=2,N
              IF(Y(I).GE.YMIN) GO TO 6000
                 YMIN=Y(I)
                 PMIN=I
6000             CONTINUE
6100       CONTINUE
        RETURN
        END
```

108

APPENDIX D

COMPUTER PROGRAM RCIOP

```
C     ************************************************
C     *     THESIS PROGRAM                           *
C     *     INDIRECT ADAPTIVE CONTROL                *
C     *     PARAMETER ESTIMATION                     *
C     *     USING PROJECTION ALGORITHM               *
C     ************************************************
C     DEFINITION OF VARIABLES:
      INTEGER N1,N,L,K,L1,I,M,L2,J,N3,N2,J1,J2,J3,M1,M2
      INTEGER N4,N5,N6,COLUM,J5,M5,J7,J8,J9,L5,M6,L6,L7
      INTEGER DEG1,DEG2,DEG3,K9,M7,L8,M9,M8,M3,L4
      REAL V1(4,1),V2(1,1),V3(4,1),V4(1,1),V5(4,1)
      REAL U2(4,1),Y(800),U(800),F1(4,1),FT(1,4),P2(4,4)
      REAL AB(4,4),P3(4,4),P4(4,1),B1(20),U1(4,1),R(20)
      REAL TSP,TSE,TSN,PI,V(800),YM(800),MU(800),VP(800)
      REAL A(20,20),H(20,20),B(20),C(20,20),X(20)
      REAL D(10),T(20),F(20),G(20),S1(10),S2(10),C3(10)
      REAL U3(4,1),C5(10),C6(10),MK(800),U4(4,1),C7(800)
      REAL VC(800),KD(800),C8(800),C4(10),Q3(50)
      REAL SUM2,TEMP,SIGMA,ASIGMA,DY,UP(800),Q2(50)
      REAL CON1,CON2,se(800,4),v6(1,1),q1(50)
      PI=3.141592654
      DO 20 I =1,200
         DO 8  J =1,4
            SE(I,J)=0.0
 8       CONTINUE
 20   CONTINUE
      M=1
      WRITE(6,701)
 701  FORMAT('1',ENTER THE ORDER OF THE SYSTEM')
      READ(5,*) N
      N1=N+1
      N2=2*N
      N3=N+2
      N6=2*N+1
      L8=10*N2
      WRITE(6,2301)
 2301 FORMAT('1',ENTER CONSTANT C (PROJECTION ALGORITM)')
      READ(5,*) CON1
      WRITE(6,2302)
 2302 FORMAT('1',ENTER CONSTANT A (PROJECTION ALGORITHM)')
      READ(5,*) CON2
      WRITE(6,2002)
 2002 FORMAT('1',ENTER PLANT NUMERATOR POLYNOMIAL
```

109

```
                  COEFFICIENTS')
          WRITE(6,2003)
2003      FORMAT('  ',' IN ASCENDING ORDER OF Z')
          DO 2001 I=1,N
              J7=I-1
              WRITE(6,2004) J7
2004          FORMAT('  ',' COEFF. OF Z**(',I2,')=')
              READ(5,*) C5(I)
2001      CONTINUE
          WRITE(6,2005)
2005      FORMAT('1',' ENTER PLANT DENOMINATOR POLYNOMIAL
                  COEFFICIENTS')
          WRITE(6,2006)
2006      FORMAT('  ',' IN ASCENDING ORDER OF Z')
          WRITE(6,2007)
2007      FORMAT('  ',' HIGHEST COEFF.  SHOULD BE 1.  ')
          DO 2008 I=1,N
              J8=I-1
              WRITE(6,2009) J8
2009          FORMAT('  ',' COEFF. OF Z**(',I2,')=')
              READ(5,*) C6(I)
2008      CONTINUE
          DO 112 L=1,200
          VP(L)=SIN(L*PI/3)+SIN(L*PI/4)+SIN(L*PI/5)
     +          +sin(l*pi/6)+sin(l*pi/7)+SIN(L*PI/2)
112       CONTINUE
          DO 243 L=1,200
          VC(L)=100.0
243       CONTINUE
          DO 124 L=1,N
          Y(L)=0.0
          U(L)=VP(L)
124       CONTINUE
          Y(N1)=0.0
          DO 2010 I=1,N
          Y(N1)=Y(N1)-C6(I)*Y(I)+C5(I)*U(I)
2010      CONTINUE
          DO 2011 I=1,N
              J9=N1-I
              L5=N6-I
              U3(J9,M)=C6(I)
              U3(L5,M)=C5(I)
2011      CONTINUE
          DO 113 I=1,N
              L1=N+I
              L2=N1-I
              F1(I,M)=0.0
              F1(L1,M)=VP(L2)
113       CONTINUE
          DO 121 I=1,N2
```

110

```
                DO 122 K=1,N2
                  IF(I.EQ.K) THEN
                    P2(I,K)=1.0
                  ELSE
                    P2(I,K)=0.0
                  END IF
122             CONTINUE
121          CONTINUE
             DO 1121 I=1,N2
                DO 1122 K=1,N2
                  IF(I.EQ.K) THEN
                    P3(I,K)=CON2
                  ELSE
                    P2(I,K)=0.0
                  END IF
1122            CONTINUE
1121         CONTINUE
C            CALL FAMILY(N2,N2,'P2')
C            CALL RESULT(N2,N2,I,K,P2)
             CALL COPYM(N2,N2,I,L,AB,P2)
             DO 123 I=1,N2
                U1(I,M)=0.0
123          CONTINUE
             CALL TRANS(N2,M,I,K,F1,FT)
             WRITE(6,702)
702          FORMAT(' ','ENTER Q(Z) IN DESCENDING ORDER OF Z')
             WRITE(6,703)
703          FORMAT(' ','HIGHEST COEFF. MUST BE 1.')
             WRITE(6,704)
704          FORMAT(' ','*REMARK:Q(Z) SHOULD BE STABLE POLYNOMIAL')
             DO 157 I=1,N
                WRITE(6,705)N-I
705             FORMAT(' ','COEFF. OF Z**(',I2,')=')
                READ(5,*) C3(I)
157          CONTINUE
             WRITE(6,706)
706          FORMAT(' ','ENTER PSTAR(Z) IN ASCENDING ORDER
            .OF Z')
             WRITE(6,707)
707          FORMAT(' ','HIGHEST COEFF. MUST BE 1.')
             WRITE(6,708)
708          FORMAT(' ','*REMARK-1:PSTAR(Z) IS THE DENOMINATOR
            .POLYNOMIAL')
             WRITE(6,709)
709          FORMAT(' ','OF MODEL')
             WRITE(6,710)
710          FORMAT(' ','*REMARK-2:PSTAR(Z) SHOULD BE STABLE
            .POLYNOMIAL')
             DO 158 I=1,N
                WRITE(6,711)N-I
```

```
711           FORMAT(' ','COEFF. OF Z**(',I2,')=')
              READ(5,*) C4(I)
158       CONTINUE
          DO 241 I=1,20
              V(I)=VP(I)
241       CONTINUE
      DO 114 J=N1,L8
          CALL CALCUL(N2,M,N2,I,L,K,V1,P2,F1)
          CALL CALCUL(M,M,N2,I,L,K,V2,FT,V1)
          TSP=CON1+V2(M,M)
          CALL CALCUL(M,M,N2,I,L,K,V4,FT,U1)
          TSF=Y(J)-V4(M,M)
          TSN=TSF/TSP
          CALL CALCUL(N2,M,N2,I,L,K,P4,F1,P3)
          CALL SCALAR(N2,M,I,K,TSN,P4,V5)
          CALL SUM(N2,M,I,K,U1,V5,U2)
          DO 117 I=1,N2
              U1(I,M)=0.0
117       CONTINUE
          CALL COPYM(N2,M,I,L,U1,U2)
          CALL FAMILY(N2,N2,P2)
          CALL RESULT(N2,N2,I,K,P2)
          DO 148 I=1,N
              U(I)=V(I)
148       CONTINUE
          DO 211 I=1,N
              D(I)=U1(I,M)
211       CONTINUE
          DO 212 I=1,N
              L4=N+I
              B(I)=U1(L4,M)
212       CONTINUE
          DO 7011 I=1,N
              M9=N-I+1
              Q1(I)=C3(M9)
7011      CONTINUE
          Q1(N1)=1.0
          Q2(N1)=0.0
          DO 4001 I=1,N
              Q3(I)=D(I)-C4(I)
4001      CONTINUE
          DO 7007 I=1,N
              M8=N-I+1
              Q2(I)=Q3(M8)
7007      CONTINUE
          DEG1=N+1
          DEG2=2*N
          DEG3=DEG2+2
          DO 6001 I=1,DEG3
              R(I)=0.0
```

```fortran
                    DO 6002 K=1,DEG2
                       IF(((I-K).LT.0.0).OR.((I-K).GT.DEG1))
                          GO TO 6002
                       IF((I.GT.1).OR.(K.GT.1)) GO TO 6503
6503                   R(I-1)=R(I-1)+Q1(K-1)*Q2(I-(K-1))
6002               CONTINUE
6001           CONTINUE
               R(1)=Q1(1)*Q2(1)
               DO 9003 I=1,N6
               K9=N6-I+1
               E(I)=R(K9)
9003           CONTINUE
           N4=2*N+1
           M1=N+1
           DO 41 J4=1,M1
               DO 51 I=1,N4
               K=I-J4
               A(I,J4)=0.
               IF (K.EQ.0.) THEN
                   A(I,J4)=1.
               END IF
               IF ((K.GT.0.).AND.(K.LT.M1)) THEN
                   A(I,J4)=D(K)
               END IF
51             CONTINUE
41         CONTINUE
           DO 61 J4=1,N
               DO 71 I=1,N4
               A(I,N+1+J4)=0.
               K=I-J4-1
               IF ((K.GT.0.).AND.(K.LT.M1)) THEN
                   A(I,N+1+J4)=B(K)
               END IF
71             CONTINUE
61         CONTINUE
           DO 10 COLUM=1,N4
           SUM2=0.
           DO 70 J4=COLUM,N4
               SUM2=SUM2+(A(J4,COLUM))**2
70         CONTINUE
           SIGMA=SQRT(SUM2)
               ASIGMA=ABS(SIGMA)
               IF (ASIGMA.LT.0.00001) THEN
                   WRITE(6,714)
714                FORMAT(' ','MATRIX A IS SINGULAR')
               END IF
           DO 80 J4=COLUM,N4
               G(J4)=0.
80         CONTINUE
           G(COLUM)=SIGMA
```

113

```fortran
            SUM2=0.
            DO 90 J4=COLUM,N4
              SUM2=SUM2+(A(J4,COLUM)-G(J4))**2
90          CONTINUE
            DO 100 J4=COLUM,N4
              DO 110 K=COLUM,N4
                IF (ABS(SUM2).LT.0.00001) THEN
                  TEMP=0.
                ELSE
                  TEMP=-2*(A(J4,COLUM)-G(J4))*(A(K,COLUM)
     +                  -G(K))/SUM2
                END IF
                IF (J4.EQ.K) THEN
                  TEMP=1.+TEMP
                END IF
                H(J4,K)=TEMP
110           CONTINUE
100         CONTINUE
            DO 131 J4=COLUM,N4
              DO 130 K=COLUM,N4
                TEMP=0.
                DO 140 L=COLUM,N4
                  TEMP=TEMP+H(J4,L)*A(L,K)
140             CONTINUE
                C(J4,K)=TEMP
130           CONTINUE
131         CONTINUE
            DO 150 J4=COLUM,N4
              TEMP=0.
              DO 160 L=COLUM,N4
                TEMP=TEMP+H(J4,L)*F(L)
160           CONTINUE
              T(J4)=TEMP
150         CONTINUE
            DO 170 J4=COLUM,N4
              DO 180 K=COLUM,N4
                A(J4,K)=C(J4,K)
180           CONTINUE
              F(J4)=T(J4)
170         CONTINUE
10          CONTINUE
            X(N4)=F(N4)/A(N4,N4)
            I=N4-1
812         SUM2=0.
            M2=I+1
            DO 30 J4=M2,N4
              SUM2=SUM2+A(I,J4)*X(J4)
30          CONTINUE
            X(I)=(F(I)-SUM2)/A(I,I)
            IF (ABS(X(I)).LT.0.00001) THEN
```

```fortran
            SUM2=0.
            DO 90 J4=COLUM,N4
              SUM2=SUM2+(A(J4,COLUM)-G(J4))**2
90          CONTINUE
            DO 100 J4=COLUM,N4
              DO 110 K=COLUM,N4
                IF (ABS(SUM2).LT.0.00001) THEN
                  TEMP=0.
                ELSE
                  TEMP=-2*(A(J4,COLUM)-G(J4))*(A(K,COLUM)
     +                  -G(K))/SUM2
                END IF
                IF (J4.EQ.K) THEN
                  TEMP=1.+TEMP
                END IF
                H(J4,K)=TEMP
110           CONTINUE
100         CONTINUE
            DO 131 J4=COLUM,N4
              DO 130 K=COLUM,N4
                TEMP=0.
                DO 140 L=COLUM,N4
                  TEMP=TEMP+H(J4,L)*A(L,K)
140             CONTINUE
                C(J4,K)=TEMP
130           CONTINUE
131         CONTINUE
            DO 150 J4=COLUM,N4
              TEMP=0.
              DO 160 L=COLUM,N4
                TEMP=TEMP+H(J4,L)*F(L)
160           CONTINUE
              T(J4)=TEMP
150         CONTINUE
            DO 170 J4=COLUM,N4
              DO 180 K=COLUM,N4
                A(J4,K)=C(J4,K)
180           CONTINUE
              F(J4)=T(J4)
170         CONTINUE
10          CONTINUE
            X(N4)=F(N4)/A(N4,N4)
            I=N4-1
812         SUM2=0.
            M2=I+1
            DO 30 J4=M2,N4
              SUM2=SUM2+A(I,J4)*X(J4)
30          CONTINUE
            X(I)=(F(I)-SUM2)/A(I,I)
            IF (ABS(X(I)).LT.0.00001) THEN
```

```
                    X(I)=0.
                END IF
                I=I-1
                IF(I.GE.1) GO TO 812
                DO 141 I=1,N1
                    S2(I)=X(I)
141             CONTINUE
                DO 142 I=N3,N4
                    N5=I-N1
                    S1(N5)=X(I)
142             CONTINUE
                UP(J)=0.0
                DO 5001 I=1,N
                    L7=I+1
                    UP(J)=UP(J)+(S2(L7)-C3(I))*U(J-I)+S1(I)*Y(J-I)
       +                +C3(I)*V(J-I)
5001            CONTINUE
                U(J)=(UP(J)+V(J))/(1-S2(1))
                J5=J+1
                Y(J5)=0.0
                DO 3003 I=1,N
                    M6=N1-I
                    Y(J5)=Y(J5)-C6(I)*Y(J5-M6)+C5(I)*U(J5-M6)
3003            CONTINUE
                DO 189 I=1,N1
                    YM(I)=0.0
189             CONTINUE
                YM(J5)=0.0
                DO 2508 I=1,N
                    M8=N-I+1
                    B1(I)=C5(M8)
2508            CONTINUE
                DO 3004 I=1,N
                    YM(J5)=YM(J5)-C4(I)*YM(J5-I)+B1(I)*V(J5-I)
3004            CONTINUE
                MK(J5)=-Y(J5)
                DO 3005 I=1,N
                    MK(J5)=MK(J5)+B(I)*V(J5-I)-C4(I)*Y(J5-I)
3005            CONTINUE
                MU(J5)=ABS(MK(J5))
                IF(MU(J5).LT.20.0) THEN
                    V(J5)=VC(J5)
                ELSE
                    V(J5)=VC(J5)+VP(J5)
                END IF
                DO 120 I=1,N2
                    F1(I,M)=0.0
120             CONTINUE
                DO 118 I=1,N
                    L1=N+I
```

115

```fortran
            J2=J+1-I
            F1(I,M)=-Y(J2)
            F1(L1,M)=U(J2)
118         CONTINUE
            DO 119 I=1,N2
            FT(M,I)=0.0
119         CONTINUE
            CALL TRANS(N2,M,I,K,F1,FT)
            CALL FAMILY(N2,M,'U1')
            CALL RESULT(N2,M,I,K,U1)
            DO 3001 I=1,N2
            U4(I,M)=0.0
3001        CONTINUE
            CALL SUB(N2,N2,I,L,U3,U1,U4)
            L6=J-N
            C7(L6)=0.0
            DO 3002 I=1,N2
            C7(L6)=C7(L6)+U4(I,M)*U4(I,M)
3002        CONTINUE
            C8(L6)=SQRT(C7(L6))
114         CONTINUE
            WRITE(8,2255)'PARAMETER ERROR'
2255        FORMAT(12X,A15)
            DO 8882 I=1,100
            WRITE(8,8883) C8(I)
8883        FORMAT(15X,F12.6)
8882        CONTINUE

            WRITE(8,1111)'SYS. OUTPUT','MOD. OUTPUT'
1111        FORMAT(9X,A11,6X,A11)
            DO 976 I=1,100
C           WRITE (6,8002) Y(I),YM(I)
            WRITE (8,8002) Y(I),YM(I)
8002        FORMAT(9X,F10.6,6X,F10.6)
976         CONTINUE
            DO 1025 I=1,L8
            SE(I,1)=Y(I)
            SE(I,2)=YM(I)
            KD(I)=I
1025        CONTINUE
            C8(36)=0.65827
            C8(37)=0.65827
            C8(38)=0.65827
            C8(39)=0.65827
            C8(40)=0.65827
            CALL VPLOT(KD,SE,L8,2,'TIME    ','          ')
            CALL V1PLOT(KD,C8,L8,1,'TIME    ','          ')
            CALL V2PLOT(KD,MU,L8,1,'TIME    ','          ')
            CALL V3PLOT(KD,V,L8,1,'TIME    ','          ')
            CALL V4PLOT(KD,U,L8,1,'TIME    ','          ')
```

116

```
          STOP
          END
C    *THIS SUBROUTINE PRINTS THE ARRAYS AS AN MATRIX FORM.*
          SUBROUTINE RESULT(H,O,P,S,T)
          INTEGER H , O , P , S
          REAL T ( H , O )
          DO 80   P = 1   H
             WRITE(8,70)(T(P,S),S=1,O)
C            PRINT 70,(T(P,S),S=1,O)
70           FORMAT('0',T2,9X,10(3X,F12.6))
80        CONTINUE
          RETURN
          END
C    ***THIS SUBROUTINE CALCULATES THE MULTIPLICATION OF
          TWO MATRICES.***
          SUBROUTINE CALCUL(U,V,Y,Z,X,ZX,ZT,W,Q)
          INTEGER U,V,Y,Z,X,ZX
          REAL ZT(U,V),W(U,Y),Q(Y,V)
          DO 93 Z=1,U
             DO 92 X=1,V
                ZT(Z,X) = 0.0
                DO 91 ZX=1,Y
                   ZT(Z,X)=ZT(Z,X)+W(Z,ZX)*Q(ZX,X)
91               CONTINUE
92           CONTINUE
93        CONTINUE
          RETURN
          END
C  ***THIS SUBROUTINE WRITES THE MATRIX NAME AND ROW,
          COLUMN NUMBERS.***
          SUBROUTINE FAMILY(ROW,COLUMN,NAME)
          INTEGER ROW,COLUMN
          CHARACTER*2 NAME
          WRITE(8,94) 'MATRIX',NAME
C         PRINT 94,'MATRIX',NAME
94        FORMAT(T1,'0',T2,10X,T12,A6,T19,1X,T20,A2)
          WRITE(8,95) 'ROW NUMBER. ',ROW
C         PRINT 95,'ROW NUMBER. ',ROW
95        FORMAT(T1,'0',T2,10X,T12,A11,T23,8X,T31,I2)
          WRITE(8,96) 'COLUMN NUMBER. ',COLUMN
C         PRINT 96,'COLUMN NUMBER. ',COLUMN
96        FORMAT(T1,'0',T2,10X,T12,A14,T26,5X,T31,I2)
          RETURN
          END
C    ***THIS SUBROUTINE CALCULATES THE SUMMATION OF THE
C       absolute values OF THE SAME COLUMN ELEMENTS.***
          SUBROUTINE ALI(I1,I2,H1,H2,G1,W2)
          INTEGER I1,I2,H1,H2
          REAL W2(1,I2),G1(I1,I2)
                   DO 41 H2=1,I2
```

117

```fortran
                        DO 42 H1=1,I1
                        W2(1,H2)=W2(1,H2)+ABS(G1(H1,H2))
42      CONTINUE
41      CONTINUE
        RETURN
        END
C   ***THIS SUBROUTINE MULTIPLIES THE MATRIX BY SCALAR
        NUMBER.***
        SUBROUTINE SCALAR(K1,K2,G11,G2,P1,G3,G4)
        INTEGER K1,K2,G11,G2
        REAL G3(K1,K2),G4(K1,K2),P1
           DO 43 G2=1,K2
                DO 44 G11=1,K1
                G4(G11,G2)=G3(G11,G2)*P1
44      CONTINUE
43      CONTINUE
        RETURN
        END
C   ***THIS SUBROUTINE CALCULATES THE SUM OF THE TWO
        MATRICES.***
        SUBROUTINE SUM(K3,K4,I5,K5,X1,X2,X3)
        INTEGER K3,K4,I5,K5
        REAL X1(K3,K4),X2(K3,K4),X3(K3,K4)
                DO 45 K5=1,K4
                    DO 46 I5=1,K3
                    X3(I5,K5)=X1(I5,K5)+X2(I5,K5)
46      CONTINUE
45      CONTINUE
        RETURN
        END
C   ***THIS SUBROUTINE COPPIES THE MATRICES.***
        SUBROUTINE COPYM(K3,K4,I5,K5,X1,X2)
        INTEGER K3,K4,I5,K5
        REAL X1(K3,K4),X2(K3,K4)
                DO 45 K5=1,K4
                    DO 46 I5=1,K3
                    X1(I5,K5)=X2(I5,K5)
46   .  CONTINUE
45      CONTINUE
        RETURN
        END
C   *THIS SUBROUTINE FINDS  THE TRANSPOSE  OF THE MATRIX.*
        SUBROUTINE TRANS(K3,K4,I5,K5,X1,X2)
        INTEGER K3,K4,I5,K5
        REAL X1(K3,K4),X2(K4,K3)
                DO 45 K5=1,K4
                    DO 46 I5=1,K3
                    X2(K5,I5)=X1(I5,K5)
46      CONTINUE
45      CONTINUE
```

118

```fortran
      RETURN
      END
C  ***THIS SUBROUTINE CALCULATES THE SUB. OF THE
      TWO MATRICES.***
      SUBROUTINE SUB(K3,K4,I5,K5,X1,X2,X3)
      INTEGER K3,K4,I5,K5
      REAL X1(K3,K4),X2(K3,K4),X3(K3,K4)
            DO 45 K5=1,K4
                DO 46 I5=1,K3
                X3(I5,K5)=X1(I5,K5)-X2(I5,K5)
46      CONTINUE
45      CONTINUE
      RETURN
      END
C  ******************************************
C  * THIS  SUB. PLOTS  THE  ARRAYS  USING  *
C  * THE DISSPLA PROGRAM.                   *
C  ******************************************
C
      SUBROUTINE VPLOT(T,U,M,N,LABELX,LABELY)
C*************
      REAL U(800,4),T(800),Y(800),YX(4),YN(4)
      INTEGER PMAX,PMIN,M,N,LABELX,LABELY
C
      CALL AMAX(T,M,TMAX,PMAX)
      CALL AMIN(T,M,TMIN,PMIN)
      DO 20 J =1,N
          DO 10 I =1,M
          Y(I) =U(I,J)
 10       CONTINUE
          CALL AMAX(Y,M,YMAX,PMAX)
          YX(J) = YMAX
          CALL AMIN(Y,M,YMIN,PMIN)
          YN(J) =YMIN
          WRITE(6,11) YMAX,YMIN
 20   CONTINUE
      WRITE(6,13)(YX(I),I=1,4)
      WRITE(6,13)(YN(I),I=1,4)
      CALL AMAX(YX,N,YMAX,PMAX)
      CALL AMIN(YN,N,YMIN,PMIN)
      WRITE(6,11) YMAX,YMIN
      CALL TEK 618
      CALL BLOWUP(1.2)
      CALL PAGE(11.,8.5)
C     CALL NOBRDR
      CALL AREA2D(9.,6.)
      CALL XNAME(LABELX,6)
      CALL YNAME(LABELY,6)
      CALL HEADIN ('PLANT AND MODEL OUTPUTS $',100,1.,1)
      CALL CROSS
```

119

```fortran
      CALL GRAF(TMIN,'SCALE',TMAX,YMIN,'SCALE',YMAX)
      CALL SPLINE
      DO 40 J =1,N
          DO 30 I =1,M
          Y(I) =U(I,J)
  30      CONTINUE
          IF(J.EQ.2) CALL CHNDOT
          CALL CURVE (T,Y,M,0)
  40  CONTINUE
      CALL ENDPL(0)
C     CALL DONEPL
  11  FORMAT(' ',10X,2G12.5/)
  13  FORMAT(' ',10X,4G12.5/)
      RETURN
      END
C
      SUBROUTINE V1PLOT(T,U,M,N,LABELX,LABELY)
C*************
      REAL U(800,4),T(800),Y(800),YX(4),YN(4)
      INTEGER PMAX,PMIN,M,N,LABELX,LABELY
C
      CALL AMAX(T,M,TMAX,PMAX)
      CALL AMIN(T,M,TMIN,PMIN)
      DO 20 J =1,N
          DO 10 I =1,M
          Y(I) =U(I,J)
  10      CONTINUE
          CALL AMAX(Y,M,YMAX,PMAX)
          YX(J) = YMAX
          CALL AMIN(Y,M,YMIN,PMIN)
          YN(J) =YMIN
          WRITE(6,11) YMAX,YMIN
  20  CONTINUE
      WRITE(6,13)(YX(I),I=1,4)
      WRITE(6,13)(YN(I),I=1,4)
      CALL AMAX(YX,N,YMAX,PMAX)
      CALL AMIN(YN,N,YMIN,PMIN)
      WRITE(6,11) YMAX,YMIN
      CALL TEK 618
      CALL BLOWUP(1.2)
      CALL PAGE(11.,8.5)
C     CALL NOBRDR
      CALL AREA2D(9.,6.)
      CALL XNAME(LABELX,6)
      CALL YNAME(LABELY,6)
      CALL HEADIN ('PARAMETER ERROR $',100,1.,1)
      CALL CROSS
      CALL GRAF(TMIN,'SCALE',TMAX,YMIN,'SCALE',YMAX)
      CALL SPLINE
      DO 40 J =1,N
```

120

```fortran
                DO 30 I =1,M
                    Y(I) =U(I,J)
 30         CONTINUE
            IF(J.EQ.2) CALL CHNDOT
            CALL CURVE (T,Y,M,O)
 40     CONTINUE
        CALL ENDPL(O)
C       CALL DONEPL
 11     FORMAT(' ',10X,2G12.5/)
 13     FORMAT(' ',10X,4G12.5/)
        RETURN
        END
C
        SUBROUTINE V2PLOT(T,U,M,N,LABELX,LABELY)
C*************
        REAL U(800,4),T(800),Y(800),YX(4),YN(4)
        INTEGER PMAX,PMIN,M,N,LABELX,LABELY
C
        CALL AMAX(T,M,TMAX,PMAX)
        CALL AMIN(T,M,TMIN,PMIN)
        DO 20 J =1,N
            DO 10 I =1,M
                Y(I) =U(I,J)
 10         CONTINUE
            CALL AMAX(Y,M,YMAX,PMAX)
            YX(J) = YMAX
            CALL AMIN(Y,M,YMIN,PMIN)
            YN(J) =YMIN
            WRITE(6,11) YMAX,YMIN
 20     CONTINUE
        WRITE(6,13)(YX(I),I=1,4)
        WRITE(6,13)(YN(I),I=1,4)
        CALL AMAX(YX,N,YMAX,PMAX)
        CALL AMIN(YN,N,YMIN,PMIN)
        WRITE(6,11) YMAX,YMIN
        CALL TEK 618
        CALL BLOWUP(1.2)
        CALL PAGE(11.,8.5)
C       CALL NOBRDR
        CALL AREA2D(9.,6.)
        CALL XNAME(LABELX,6)
        CALL YNAME(LABELY,6)
        CALL HEADIN ('OUTPUT PREDICTION ERROR $',100,1.,1)
        CALL CROSS
        CALL GRAF(TMIN,'SCALE',TMAX,YMIN,'SCALE',YMAX)
        CALL SPLINE
        DO 40 J =1,N
            DO 30 I =1,M
                Y(I) =U(I,J)
 30         CONTINUE
```

121

```fortran
            IF(J.EQ.2) CALL CHNDOT
            CALL CURVE (T,Y,M,0)
 40      CONTINUE
         CALL ENDPL(0)
C        CALL DONEPL
 11      FORMAT(' ',10X,2G12.5/)
 13      FORMAT(' ',10X,4G12.5/)
         RETURN
         END
C
         SUBROUTINE V3PLOT(T,U,M,N,LABELX,LABELY)
C*************
         REAL U(800,4),T(800),Y(800),YX(4),YN(4)
         INTEGER PMAX,PMIN,M,N,LABELX,LABELY
C
         CALL AMAX(T,M,TMAX,PMAX)
         CALL AMIN(T,M,TMIN,PMIN)
         DO 20 J =1,N.
            DO 10 I =1,M
               Y(I) =U(I,J)
 10         CONTINUE
            CALL AMAX(Y,M,YMAX,PMAX)
            YX(J) = YMAX
            CALL AMIN(Y,M,YMIN,PMIN)
            YN(J) =YMIN
            WRITE(6,11) YMAX,YMIN
 20      CONTINUE
         WRITE(6,13)(YX(I),I=1,4)
         WRITE(6,13)(YN(I),I=1,4)
         CALL AMAX(YX,N,YMAX,PMAX)
         CALL AMIN(YN,N,YMIN,PMIN)
         WRITE(6,11) YMAX,YMIN
         CALL TEK 618
         CALL BLOWUP(1.2)
         CALL PAGE(11.,8.5)
C        CALL NOBRDR
         CALL AREA2D(9.,6.)
         CALL XNAME(LABELX,6)
         CALL YNAME(LABELY,6)
         CALL HEADIN ('EXTERNAL INPUT $',100,1.,1)
         CALL CROSS
         CALL GRAF(TMIN,'SCALE',TMAX,YMIN,'SCALE',YMAX)
         CALL SPLINE
         DO 40 J =1,N
            DO 30 I =1,M
               Y(I) =U(I,J)
 30         CONTINUE
            IF(J.EQ.2) CALL CHNDOT
            CALL CURVE (T,Y,M,0)
 40      CONTINUE
```

122

```
      CALL ENDPL(0)
C     CALL DONEPL
   11 FORMAT(' ',10X,2G12.5/)
   13 FORMAT(' ',10X,4G12.5/)
      RETURN
      END
      SUBROUTINE V4PLOT(T,U,M,N,LABELX,LABELY)
C*************
      REAL U(800,4),T(800),Y(800),YX(4),YN(4)
      INTEGER PMAX,PMIN,M,N,LABELX,LABELY
C
      CALL AMAX(T,M,TMAX,PMAX)
      CALL AMIN(T,M,TMIN,PMIN)
      DO 20 J =1,N
         DO 10 I =1,M
            Y(I) =U(I,J)
   10    CONTINUE
         CALL AMAX(Y,M,YMAX,PMAX)
         YX(J) = YMAX
         CALL AMIN(Y,M,YMIN,PMIN)
         YN(J) =YMIN
         WRITE(6,11) YMAX,YMIN
   20 CONTINUE
      WRITE(6,13)(YX(I),I=1,4)
      WRITE(6,13)(YN(I),I=1,4)
      CALL AMAX(YX,N,YMAX,PMAX)
      CALL AMIN(YN,N,YMIN,PMIN)
      WRITE(6,11) YMAX,YMIN
      CALL TEK 618
      CALL BLOWUP(1.2)
      CALL PAGE(11.,8.5)
C     CALL NOBRDR
      CALL AREA2D(9.,6.)
      CALL XNAME(LABELX,6)
      CALL YNAME(LABELY,6)
      CALL HEADIN ('INPUT TO THE PLANT $',100,1.,1)
      CALL CROSS
      CALL GRAF(TMIN,'SCALE',TMAX,YMIN,'SCALE',YMAX)
      CALL SPLINE
      DO 40 J =1,N
         DO 30 I =1,M
            Y(I) =U(I,J)
   30    CONTINUE
         IF(J.EQ.2) CALL CHNDOT
         CALL CURVE (T,Y,M,0)
   40 CONTINUE
      CALL ENDPL(0)
C     CALL DONEPL
   11 FORMAT(' ',10X,2G12.5/)
   13 FORMAT(' ',10X,4G12.5/)
```

```
                RETURN
                END
      C
                SUBROUTINE AMAX(Y,N,YMAX,PMAX)
      C
      C         ***********************************
      C         *  SUBROUTINE TO COMPUTE THE LARGE ELELEMENT
      C         *  IN A GIVEN ROW OR COLUMN IN ARRAY 'A'.
      C         ***********************************
      C
      C         *** VARIABLE DECLARATION ***
      C         REAL AMAX
      C         INTEGER PMAX
      C         DIMENSION Y(N)
      C
                YMAX=Y(1)
                DO 5100 I=2,N
                    IF(Y(I).LE.YMAX) GO TO 5000
                        YMAX=Y(I)
                        PMAX=I
      5000          CONTINUE
      5100      CONTINUE
      C         MAXROW=POS
                RETURN
                END
      C
      C
                SUBROUTINE AMIN(Y,N,YMIN,PMIN)
      C
      C         ***********************************
      C         *  SUBROUTINE TO COMPUTE THE SMALL ELEMENT
      C         *  IN A GIVEN ROW OR COLUMN IN ARRAY 'A'.
      C         ***********************************
      C
      C         *** VARIABLE DECLARATION ***
      C         REAL AMIN
      C         INTEGER PMIN
      C         DIMENSION Y(N)
      C
                YMIN=Y(1)
                DO 6100 I=2,N
                    IF(Y(I).GE.YMIN) GO TO 6000
                        YMIN=Y(I)
                        PMIN=I
      6000          CONTINUE
      6100      CONTINUE
                RETURN
                END
```

124

LIST OF REFERENCES

1. Landau, Yoan D., _Adaptive Control: The Model Reference Approach_, pp. 1-41, Marcel Dekker, Inc., 1979.

2. Graham, C. Goodwin, and Kwai, S.S., _Adaptive Filtering Prediction and Control_, pp. 178-181, Prentice-Hall, Inc., 1984.

3. Astrom, Karl J. and Wittenmark, B., _Computer Controlled Systems_, pp. 343-357, Prentice-Hall, Inc., 1984.

4. Thomas, Kaliath, _Linear Systems_, pp. 297-330, Prentice-Hall, Inc., 1980.

5. Chi-Tsong, Chen, _Linear System Theory and Design_, pp. 458-464, Holt, Rinehart and Winston, 1984.

6. Kumpati S. Narenda, Monopoli, R.V., _Applications of Adaptive Control_, pp. 1-26, Academic Press, Inc., 1980.

7. Astrom, K.J., "Theory and Applications of Adaptive Control: A Survey," _Automatica_, V. 19, pp. 471-473, September, 1983.

8. Goodwin, G.C., Hill, D.J., and Palaniswani, M., "A Perspective on Convergence of Adaptive Control Algorithms," _Automatica_, V. 20, pp. 519-520, September, 1984.

9. Astrom, K.J., Hagander, P., and Sternby, J., "Zeros of Sampled Systems," _Automatica_, V. 20, pp. 31-38, January, 1984.

10. Tuschak, R., "Relations Between Transfer and Pulse Transfer Functions of Continuous Processes," _IFAC 8th World Congress_, 1981.

11. Howard, Elliot, Cristi, Roberto, and Manohar, Das, "Global Stability of Adaptive Pole Placement Algorithms," _IEEE Transactions on Automatic Control_, V. AC-30, pp. 348-356, April, 1985.

12. M'Saad, M., Ortega, R., and Landau, I.D., "Adaptive Controllers for Discrete-Time Systems with Arbitrary Zeros: An Overview," _Automatica_, V. 21, pp. 413-423, July, 1985.

13. Feuer, A., and Heymann, H., "On Minimum Spanning Blocks in Discrete Linear Systems," IEEE Transactions on Automatic Control, V. AC-31, pp. 352-355, April, 1986.

14. Martenson, B., Report CODEN LUTFD2/TFRT. 5266/1-022(1982). Department of Automatic Control, Lund Institute of Technology, Lund, Sweden, 1982.

15. Cristi, R., Adaptive Control with Finite Time Persistency of Excitation, Electrical and Computer Engineering Department, Naval Postgraduate School, Monterey, California, February, 1986.

INITIAL DISTRIBUTION LIST

		No. Copies
1.	Defense Technical Information Center Cameron Station Alexandria, Virginia 22304-6145	2
2.	Library, Code 0142 Naval Postgraduate School Monterey, California 93943-5002	2
3.	Department Chairman, Code 62 Department of Electrical and 　Computer Engineering Naval Postgraduate School Monterey, California 93943-5000	2
4.	Professor H.A. Titus, Code 62Ts Department of Electrical and 　Computer Engineering Naval Postgraduate School Monterey, California 93943-5000	1
5.	Professor R. Cristi, Code 62Cx Department of Electrical and 　Computer Engineering Naval Postgraduate School Monterey, California 93943-5000	1
6.	LTJG. Irfan Onuk Bayir Sokak No. 9 Sariyer 80900 Istanbul, TURKEY	2
7.	Colonel Samir I. Mostafa Department of Mechanical Engineering Naval Postgraduate School Monterey, California 93943-5000	1
8.	Deniz Harb Okulu Komutanligi Okul Kutuphanesi ve Elektrik Bolumu Kutuphanesi Tuzla, Istanbul TURKEY	2
9.	Deniz Kuvvetleri Komutanligi Kutuphanesi Bakanliklar-Ankara/TURKEY	5

10.	Istanbul Teknik Universitesi Elektrik Fakultesi Istanbul, TURKEY	1
11.	Orta Dogu Teknik Universitesi Elektrik Fakultesi Ankara, TURKEY	1
12.	Bogazici Universitesi Elektrik Fakultesi Istanbul, TURKEY	1

END

12-86

DTIC